






For reference only. See data sheet for the detailed specifications.

Technical Specification

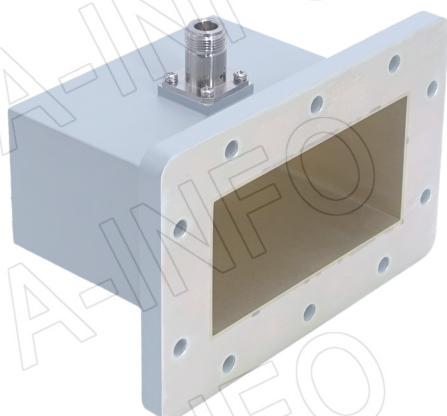


EIA WR	WR430
Frequency Range(GHz)	1.7 – 2.6
Insertion Loss(dB)	0.12 Max.
VSWR	1.25:1 Max.
Flange	FDP22(UDR22)
Connector	N-Female
Average Power(W CW)	300 Max.
Peak Power(KW)	3
Material	Al
Size(mm)	100 x 161.1 x 111.5
Net Weight(Kg)	0.64 Around

Outline Drawing (Size: mm)

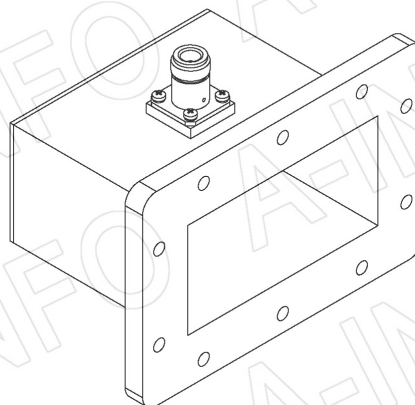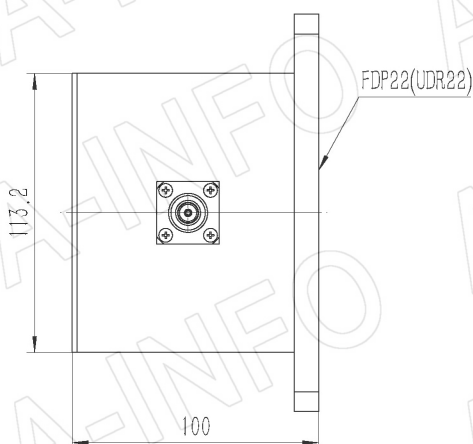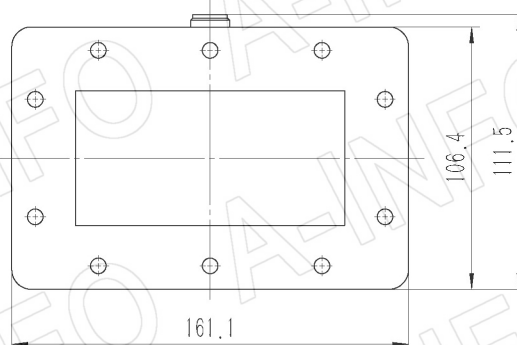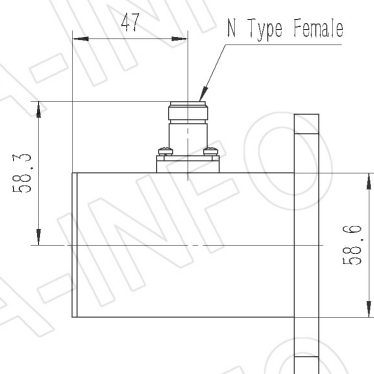


Flange Drawing (Size: mm)

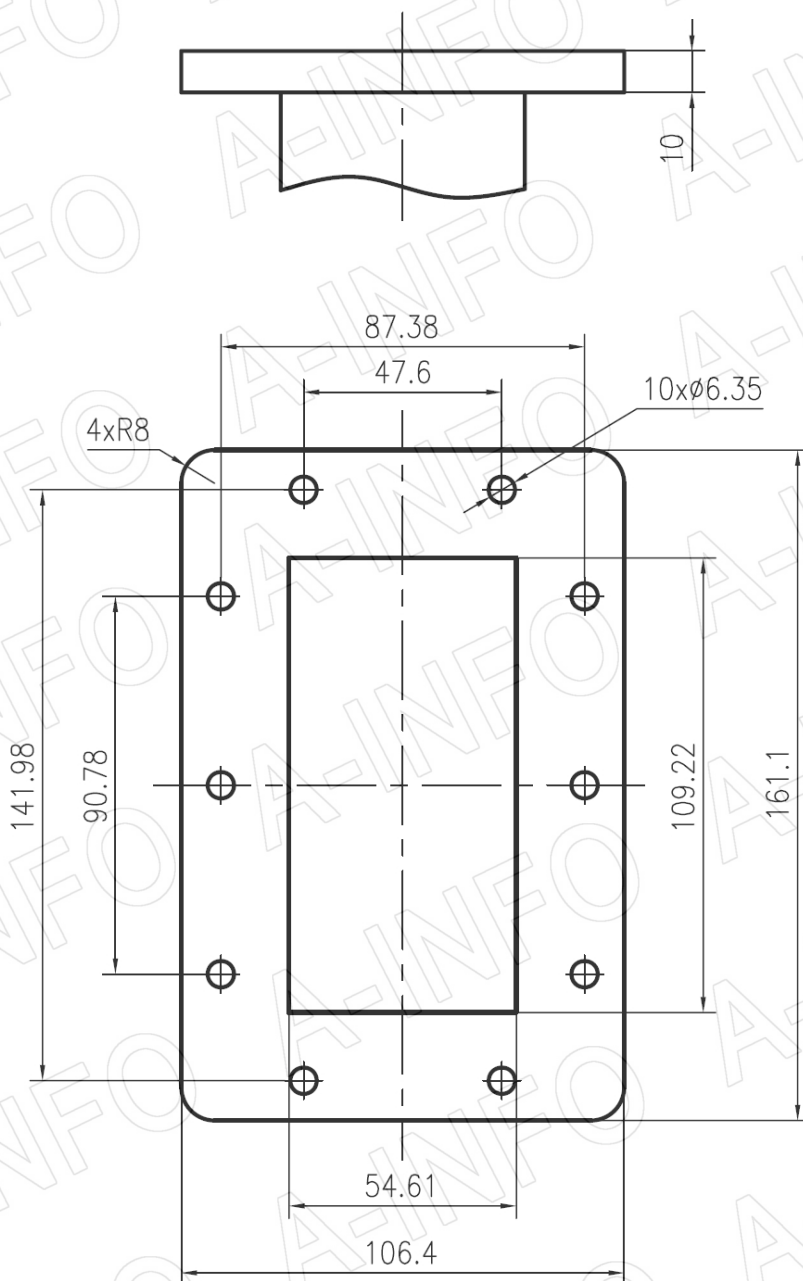

FDP22

Test Results

Insertion Loss (Test with two adapters back to back)

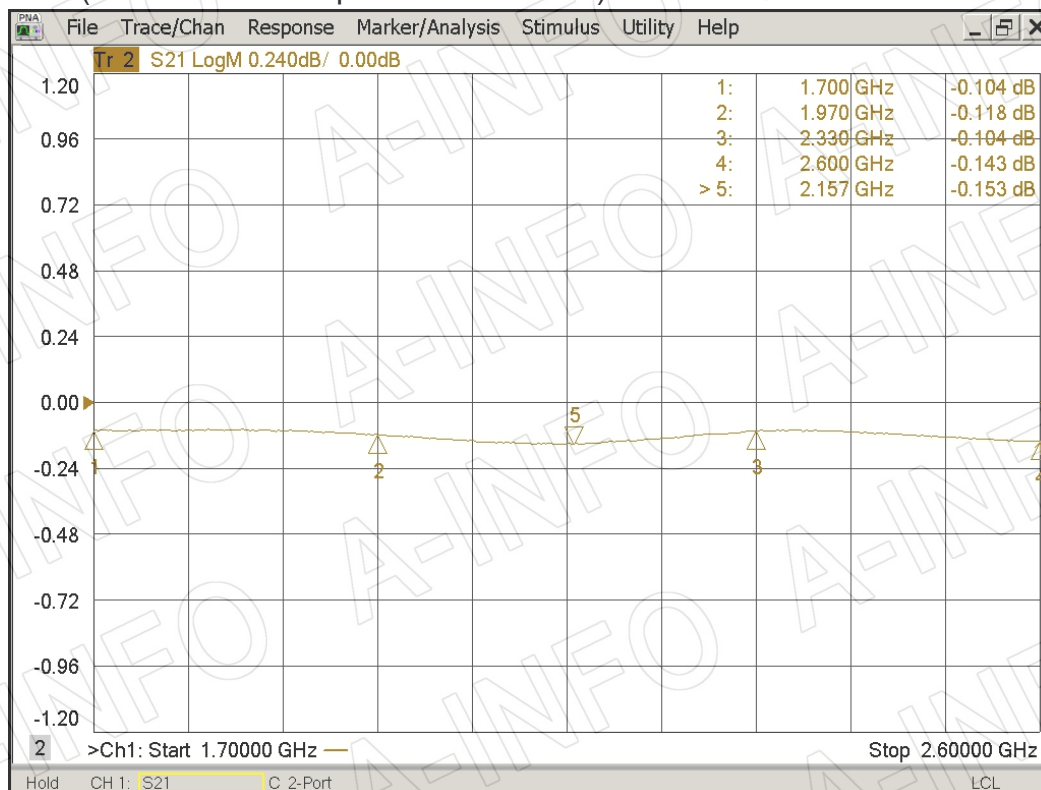

VSWR

