


For reference only. See data sheet for the detailed specifications.

Technical Specification




EIA WR	WR28
Frequency Range(GHz)	26.5 – 40.0
Attenuation(dB/m)	2.4 Max.
VSWR	1.35:1 Max.
Average Power(KW)	0.075
Max. Twist(deg/m)	510
Min. E-Bend Radius(mm)	30
Min. H-Bend Radius(mm)	60
Flange	FBP320-M(UBR320-M)
Jacket	Rubber
Operating Temp.(°C)	-55 ~ +85
Material	Cu
Length(mm)	500
Net Weight(Kg)	0.08 Around

Outline Drawing (Size: mm)

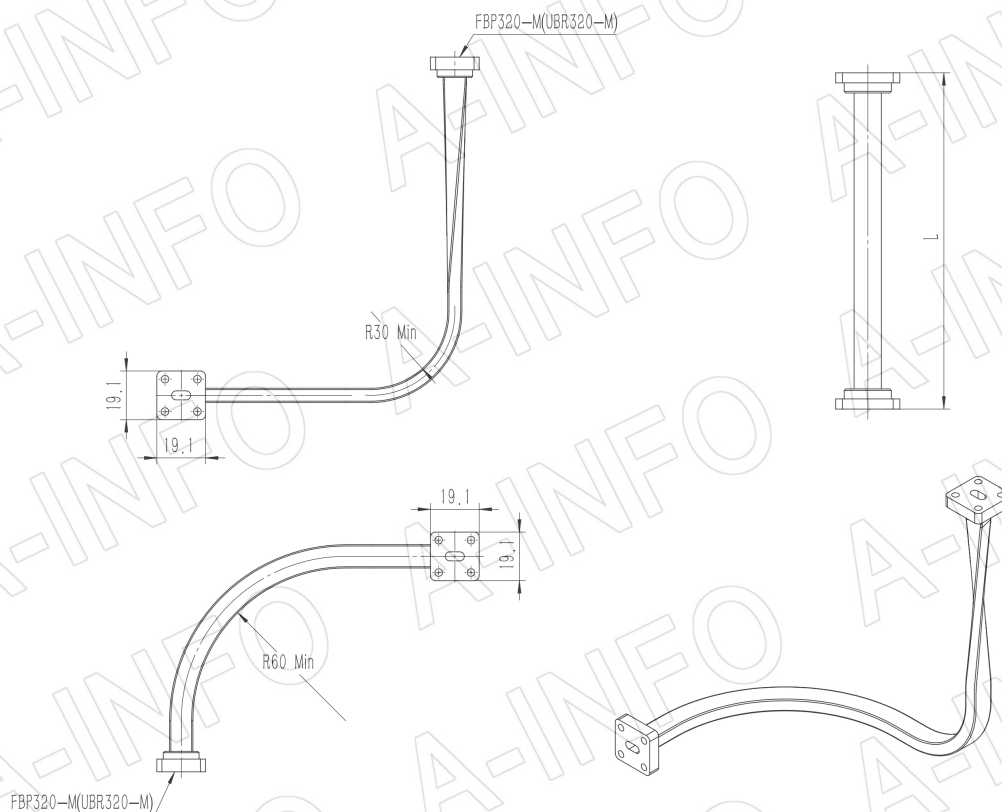


Flange Drawing (Size: mm)

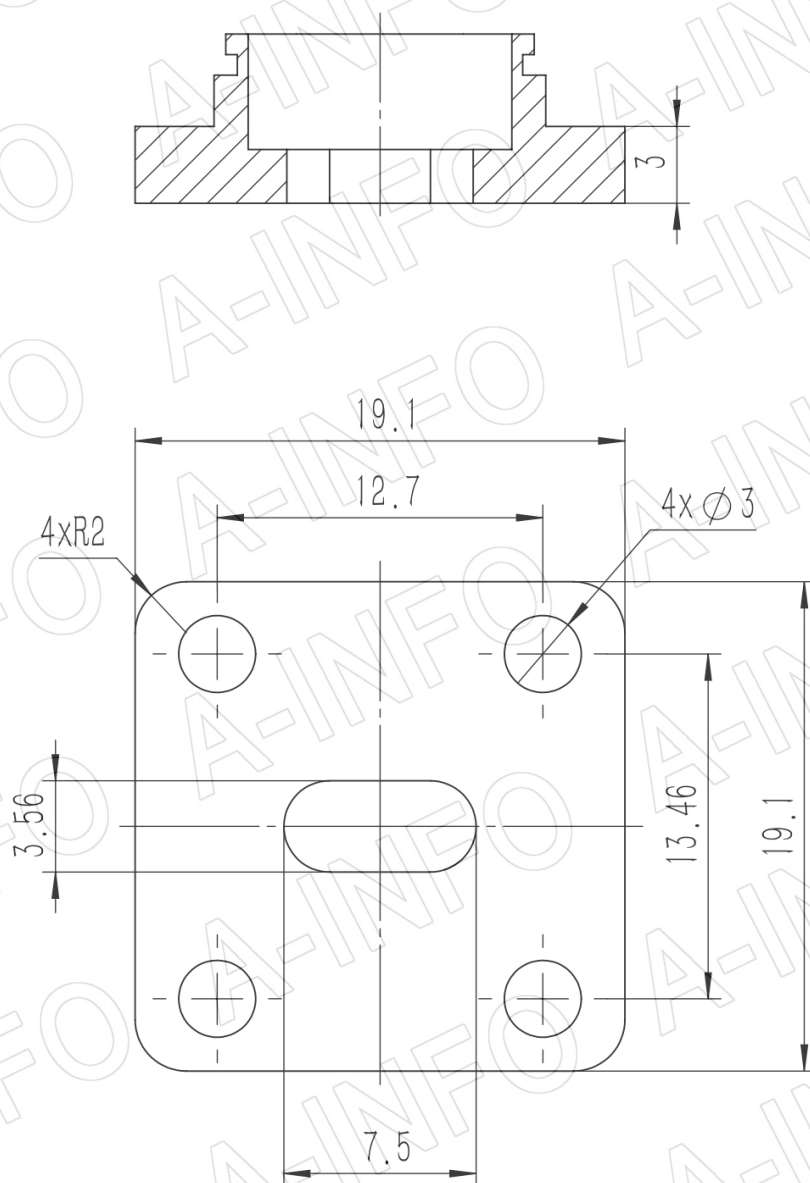

FBP320-M

Test Results

Attenuation (I.L.: 2.0100dB/m Max.)

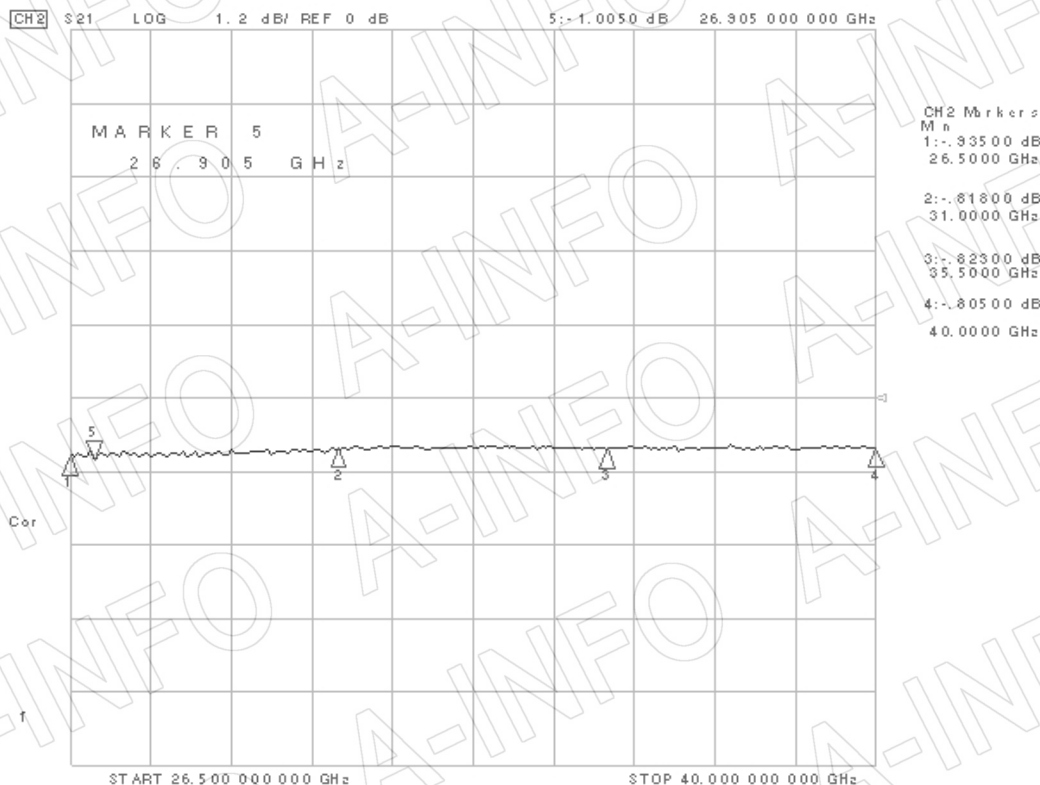

VSWR

