


Technical Specification




Frequency Range(GHz)	8.0 - 12.0
Input VSWR	1.6:1 Max.
Output VSWR	1.5:1 Max.
Insertion Loss(dB)	2.2 Max.
Isolation(dB)	16 Min.
Amplitude Balance(dB)	±0.8 Max.
Phase Balance(°)	±10 Max.
Power Handling(W CW)	20 Max.
Connector	SMA-Female
Operating Temp.(°C)	-55~+85
Material	Al
Size(mm)	152.7 x 117.4 x 10
N.W.(Kg)	0.43 Around

Outline Drawing (Size: mm)

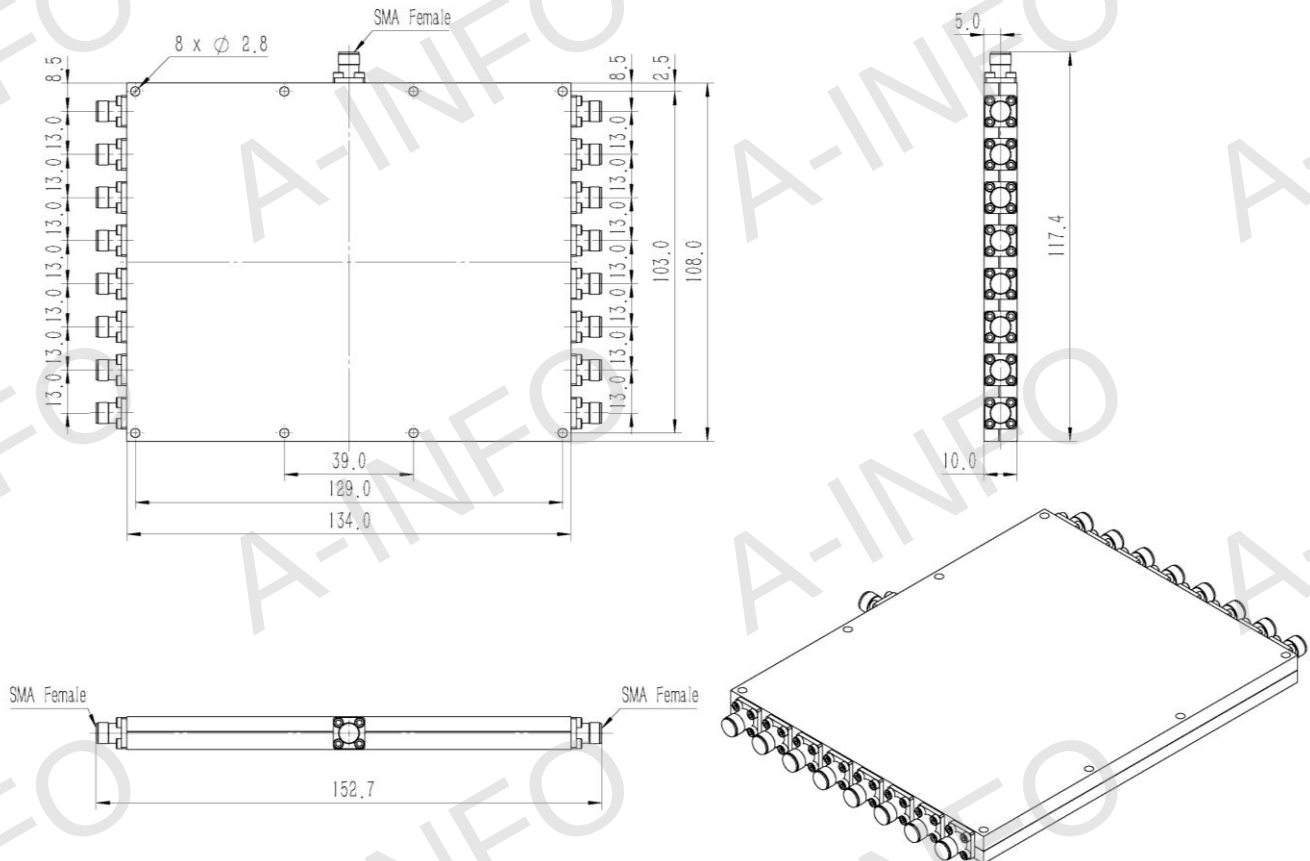


Test Results

I.L. & VSWR

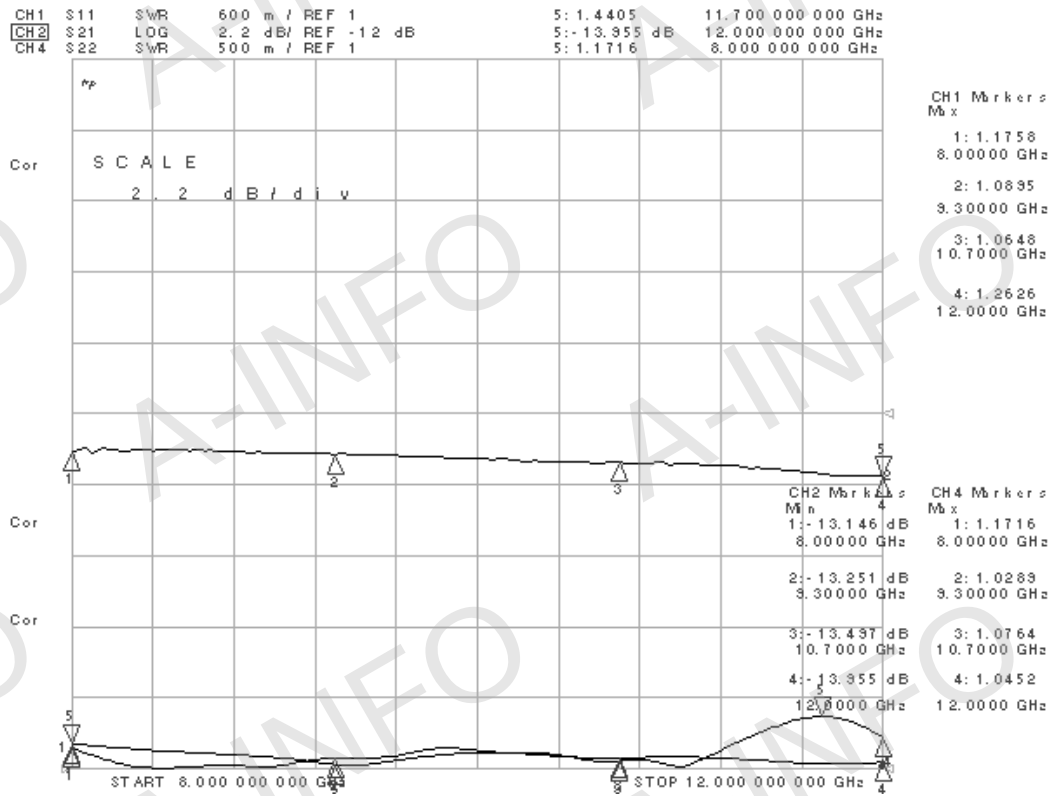

Isolation

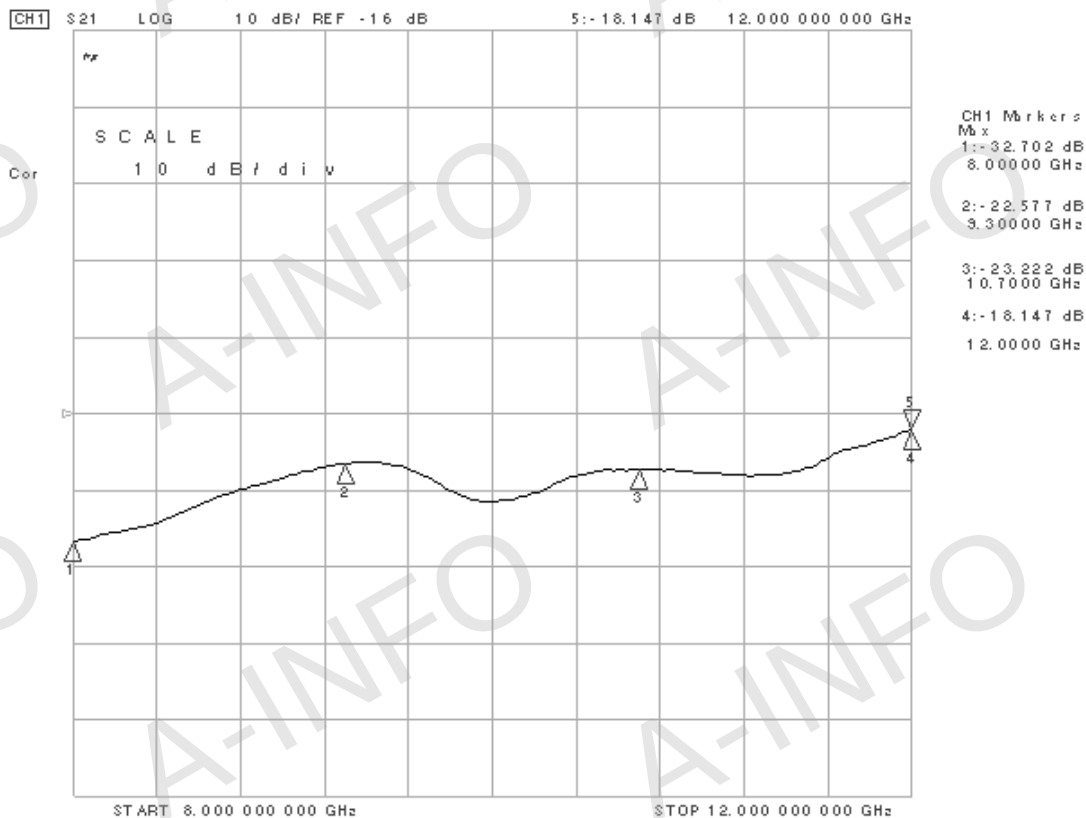

Amplitude Balance & Phase Balance & VSWR

