

For reference only. See data sheet for the detailed specifications.



Technical Specification



Frequency Range(GHz)	7.5 – 18.0
Polarization	Linear
Focal Length(mm)	440 Typ.
Spot Size(mm)	Φ75 Typ.
VSWR	A Type: 1.80:1 Max.
	C Type: 1.80:1 Max.
Output	A Type: FPWRD750D24
	C Type: SMA-Female or N-Female
Material	Al
Size(mm)	A Type: 249 x 249 x 505.6
	C Type: 249 x 249 x 537.3
Net Weight(Kg)	A Type: 5.67 Around
	C Type: 5.81 Around

Outline Drawing (Size: mm)

FPWRD750D24 Output (P/N: LB-CLS-75180-70-50-A)

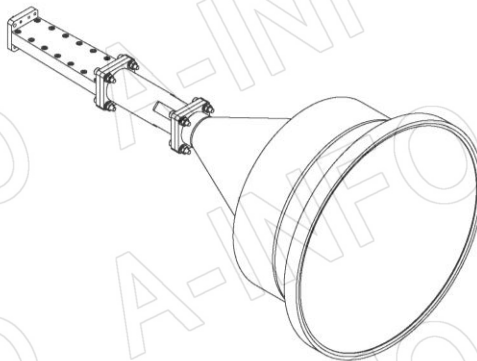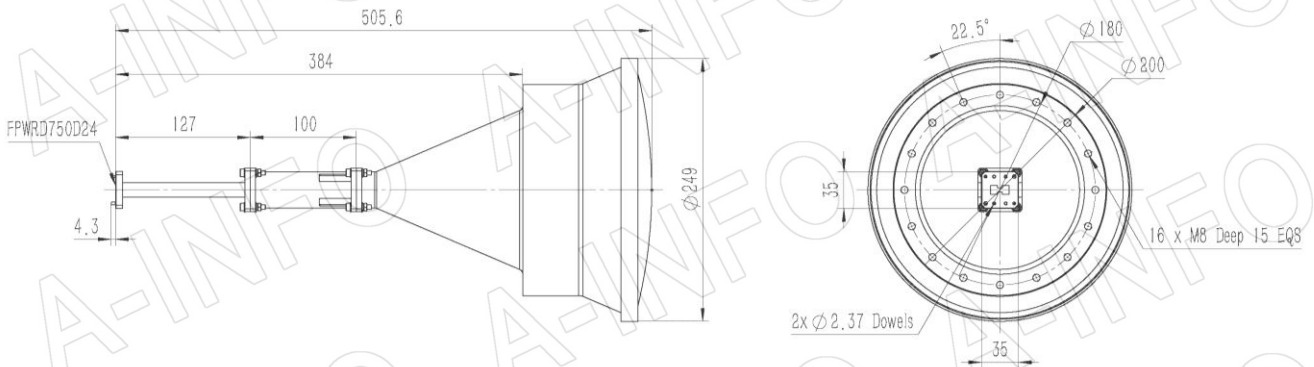

AINFO INC.

Page 1 of 6

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


SMA-Female Output (P/N: LB-CLS-75180-70-50-C-SF)

For N-Female output outline drawing, please contact A-INFO.

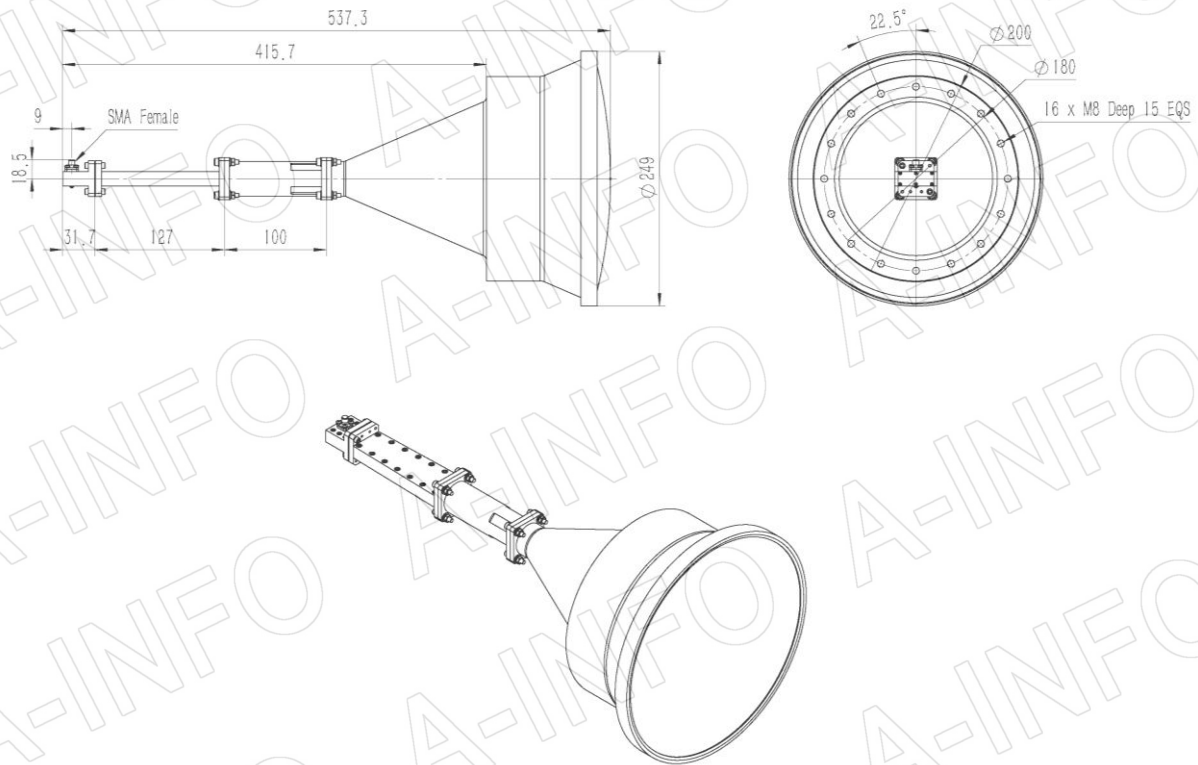


SMA-Female Output with Round Mounting Bracket (Option, P/N: LB-CLS-75180-70-MB)

For N-Female output outline drawing, please contact A-INFO.

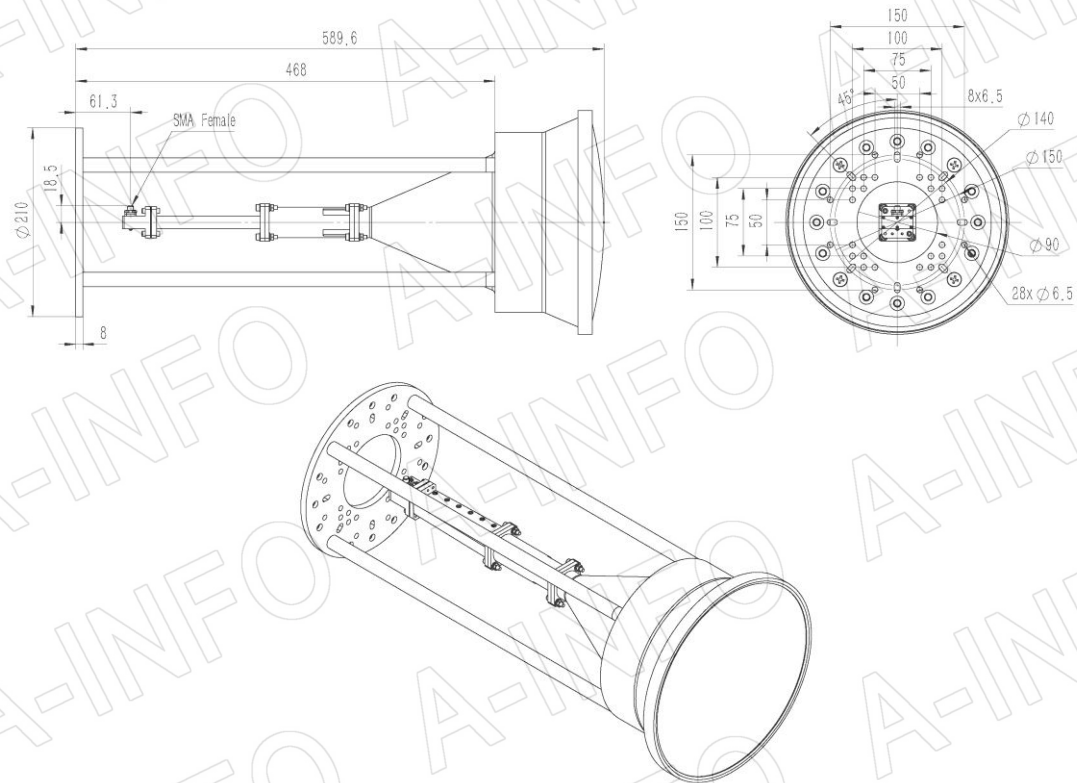

SMA-Female Output with L Type Mounting Bracket (Option, P/N: LB-CL-90-70-L)


For N-Female output outline drawing, please contact A-INFO.

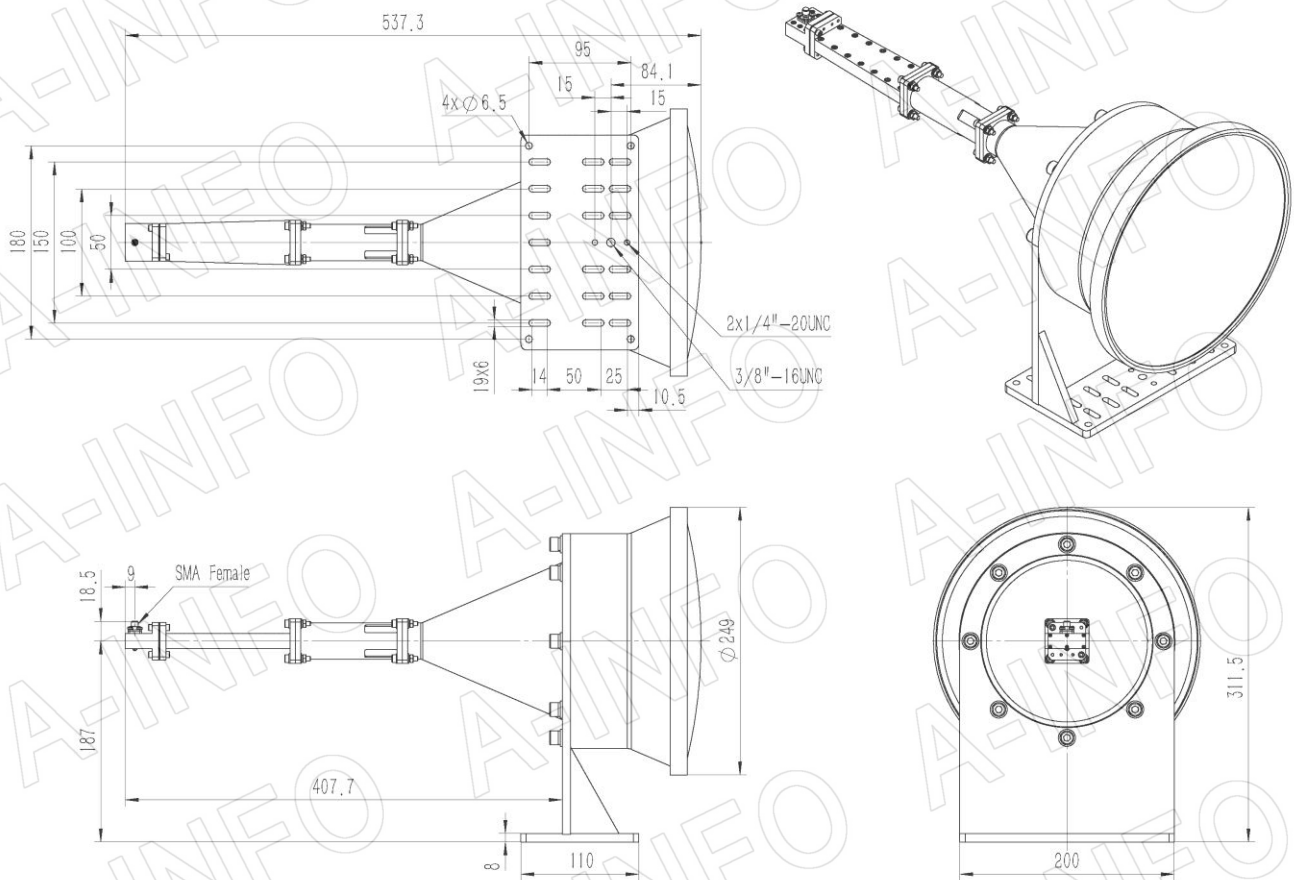

Flange Drawing (Size: mm)


FPWRD750D24

(With two through mounting holes
and two screws holes)

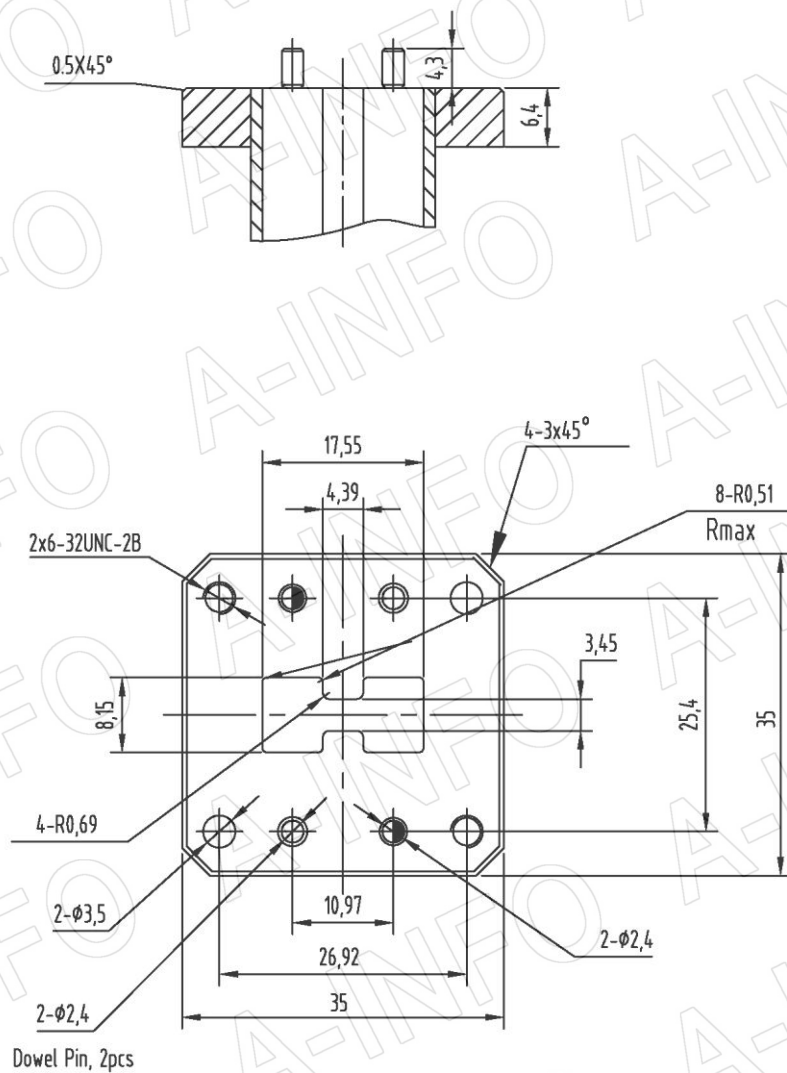


Test Results

1. Spot Size

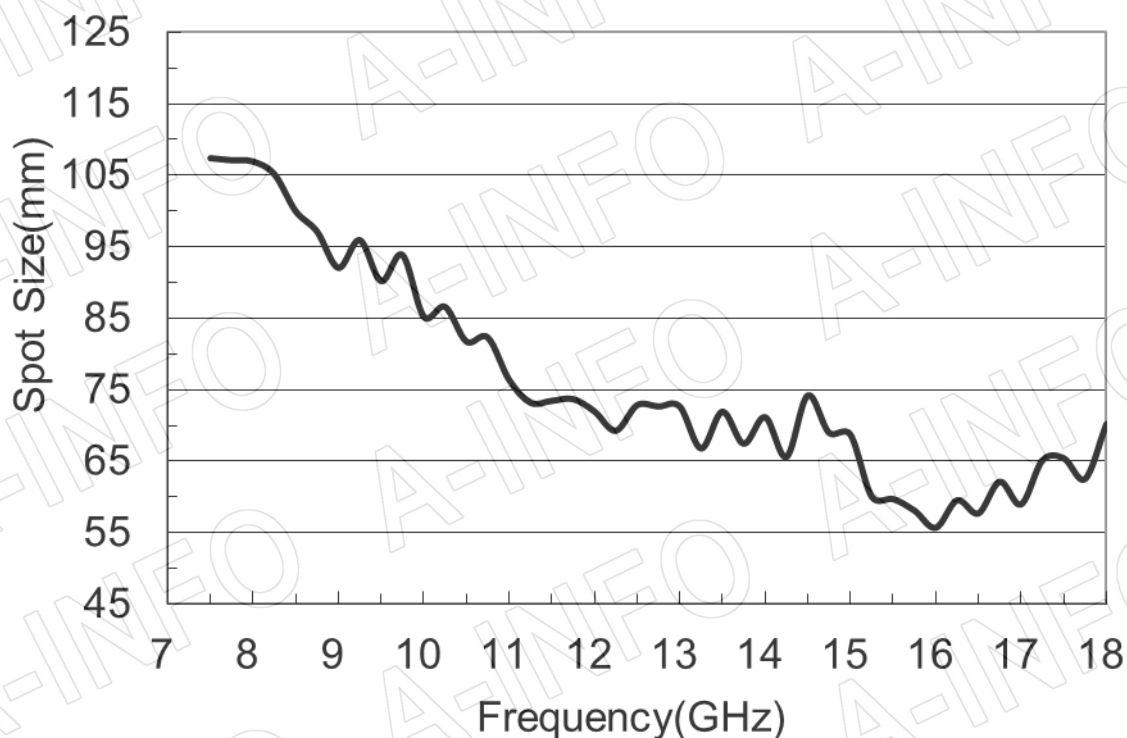

2. VSWR_A Type

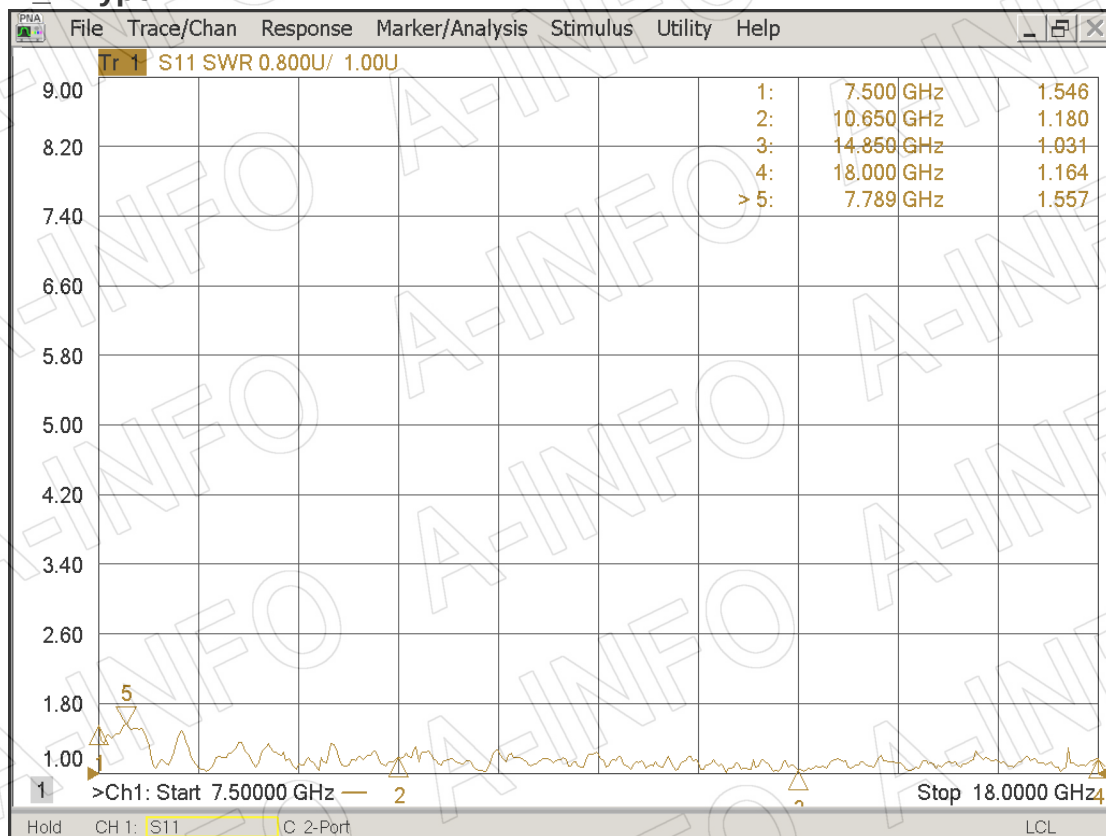

VSWR_C Type

