


For reference only. See data sheet for the detailed specifications.

Technical Specification


EIA WRD	WRD750
Frequency Range(GHz)	7.5 – 18.0
Attenuation(dB/m)	2.6 Max.
VSWR	1.50:1 Max.
Max. Twist(deg/m)	110
Min. H-Bend Radius(mm)	830
Flange	FPWRD750D24-M
Jacket	Rubber
Operating Temp.(°C)	-55 ~ +85
Material	Cu
Length(mm)	500
Net Weight(Kg)	0.24 Around



Outline Drawing (Size: mm)

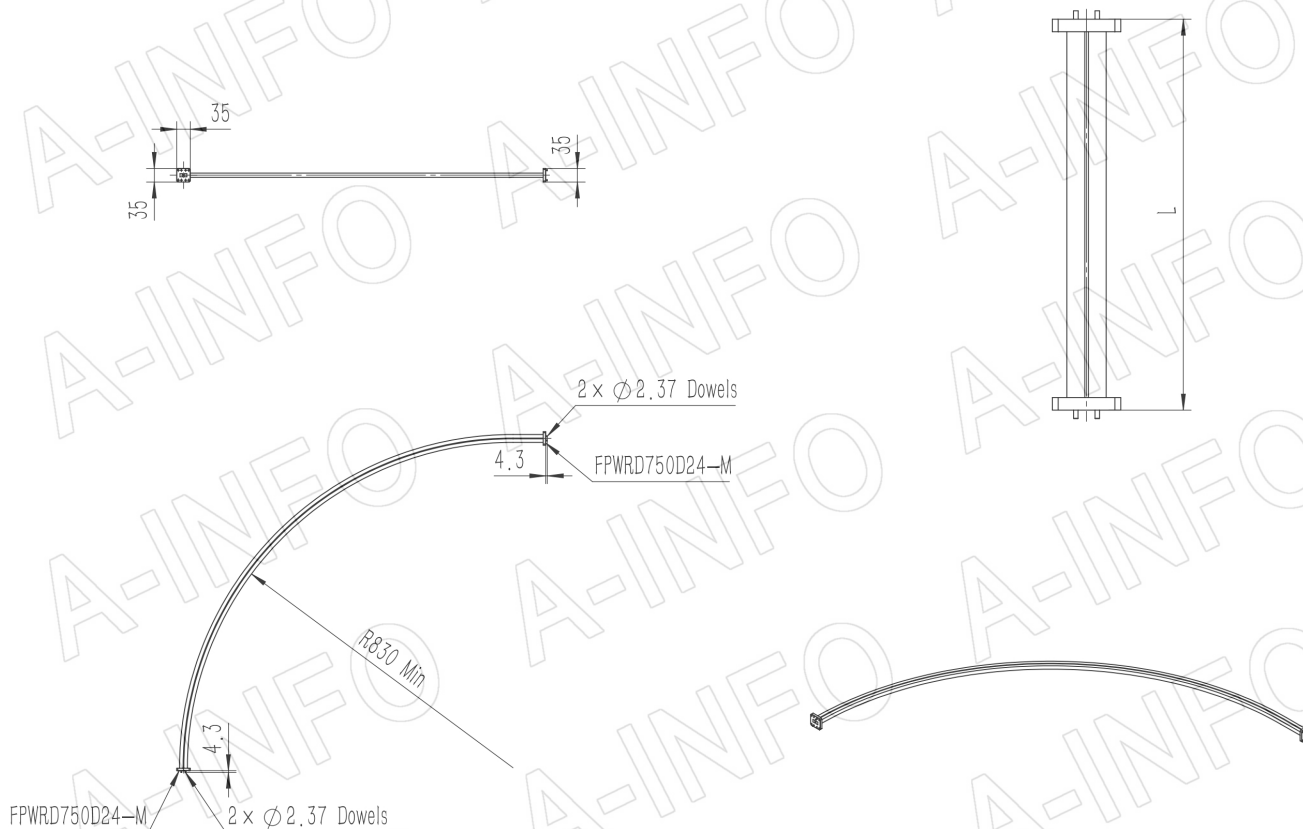


FPWRD750D24-M
(With four through mounting holes)

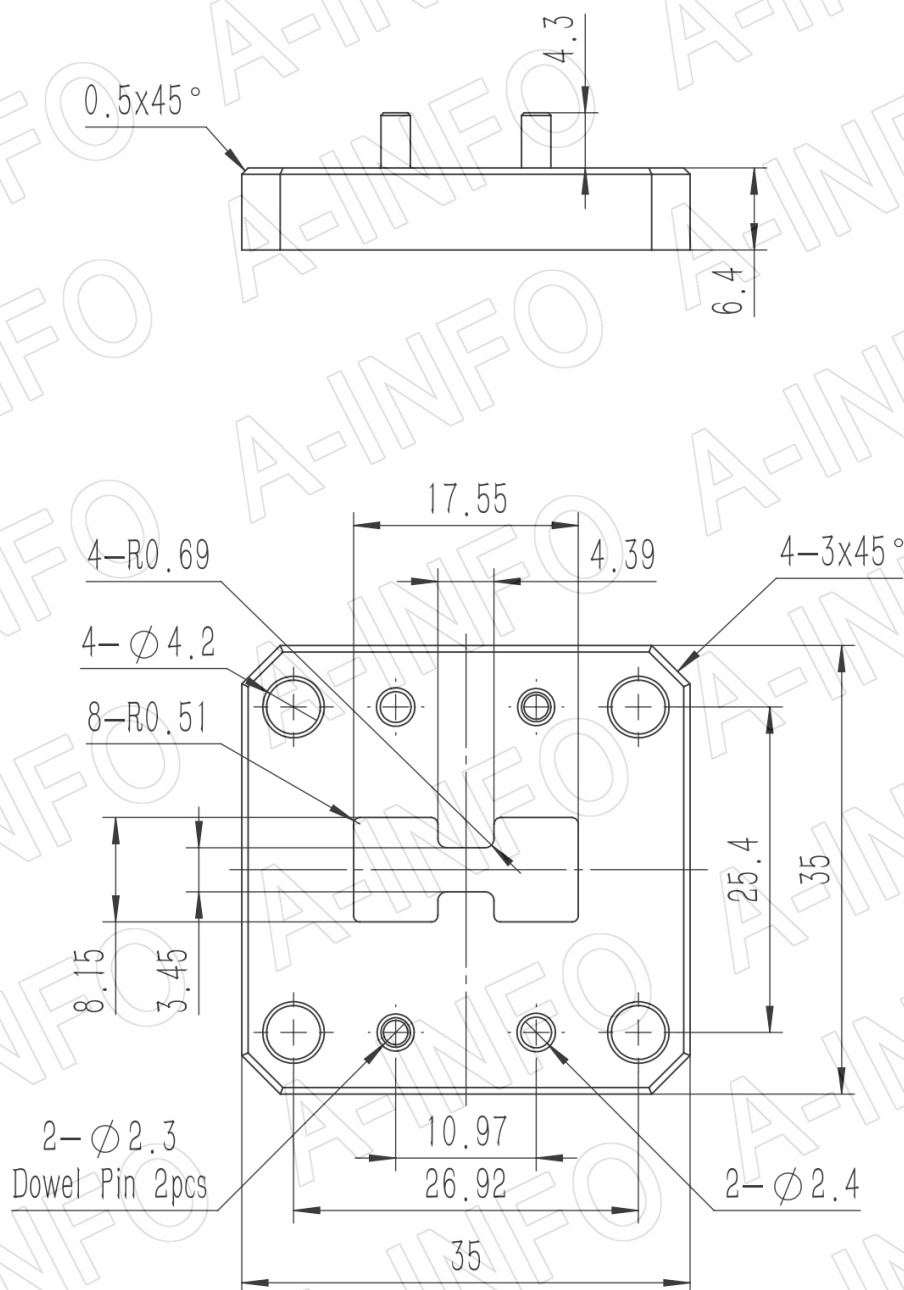

Test Results

Attenuation (I.L.: 1.5960dB/m Max.)

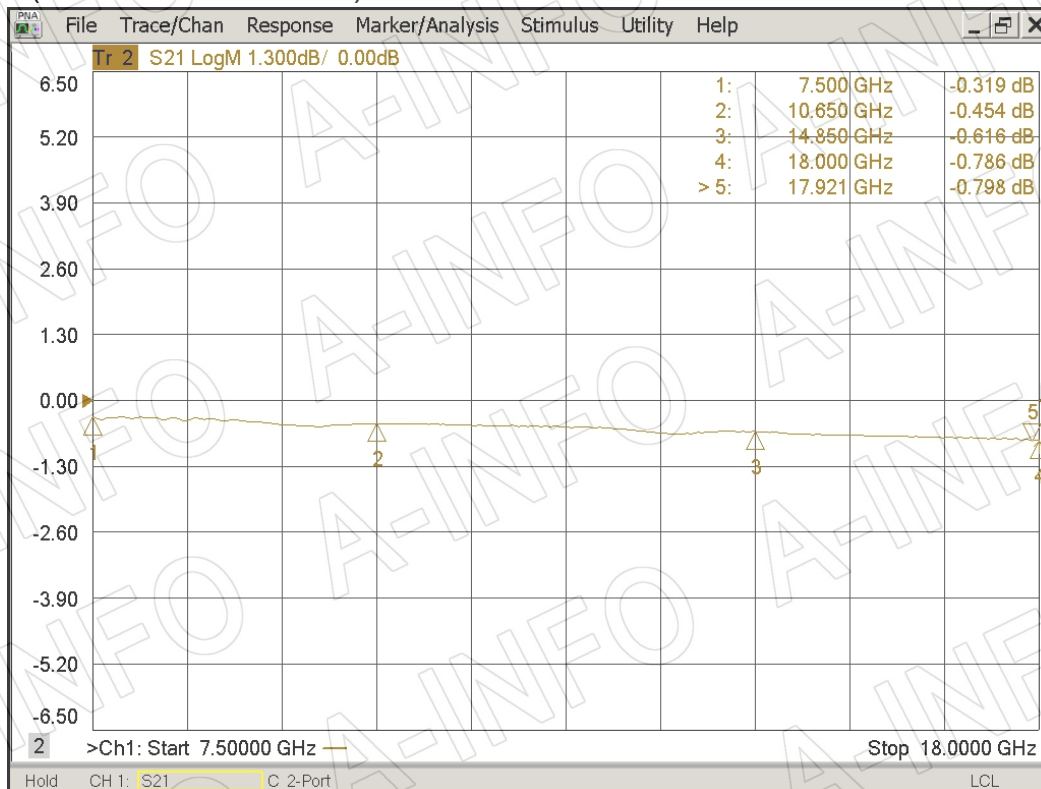

VSWR

