


Technical Specification




EIA WR	WR75
Frequency Range(GHz)	10.0 – 15.0
Attenuation(dB/m)	0.65 Max.
VSWR	1.20:1 Max.
Average Power(KW)	0.75
Inner Size(mm)	19.05 x 9.525
Max. Twist(deg/m)	360
Min. E-Bend Radius(mm)	63
Min. H-Bend Radius(mm)	126
Flange	FBP120(UBR120)
Jacket	Silicone Rubber
Operating Temp.(°C)	-55 ~ +85
Material	Cu
Length(mm)	800
Net Weight(Kg)	0.50 Around

Outline Drawing (Size: mm)

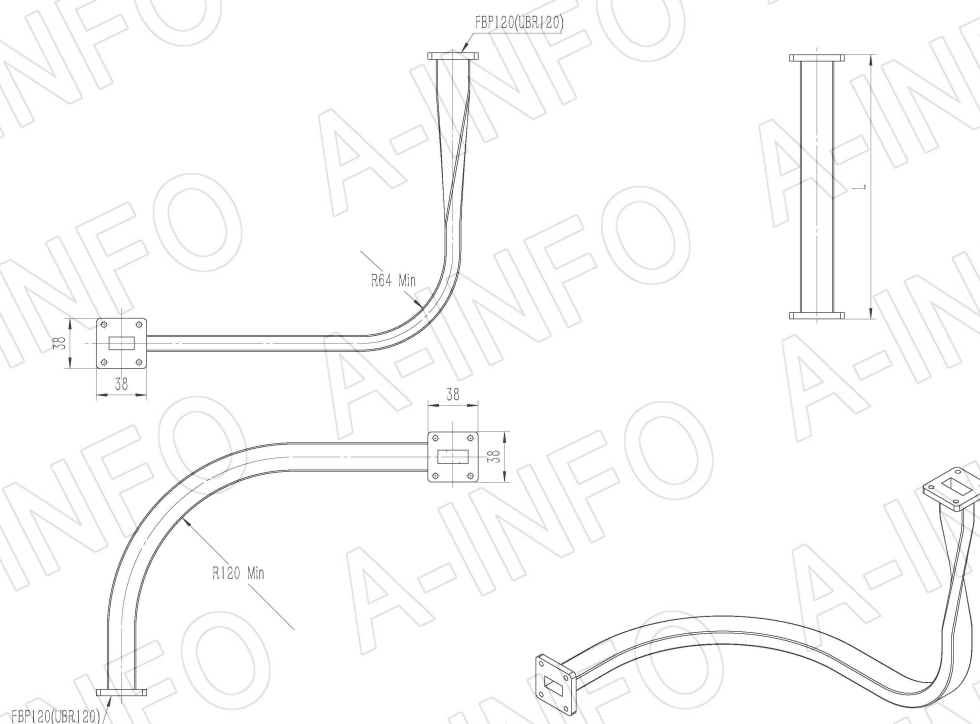


Flange Drawing (Size: mm)

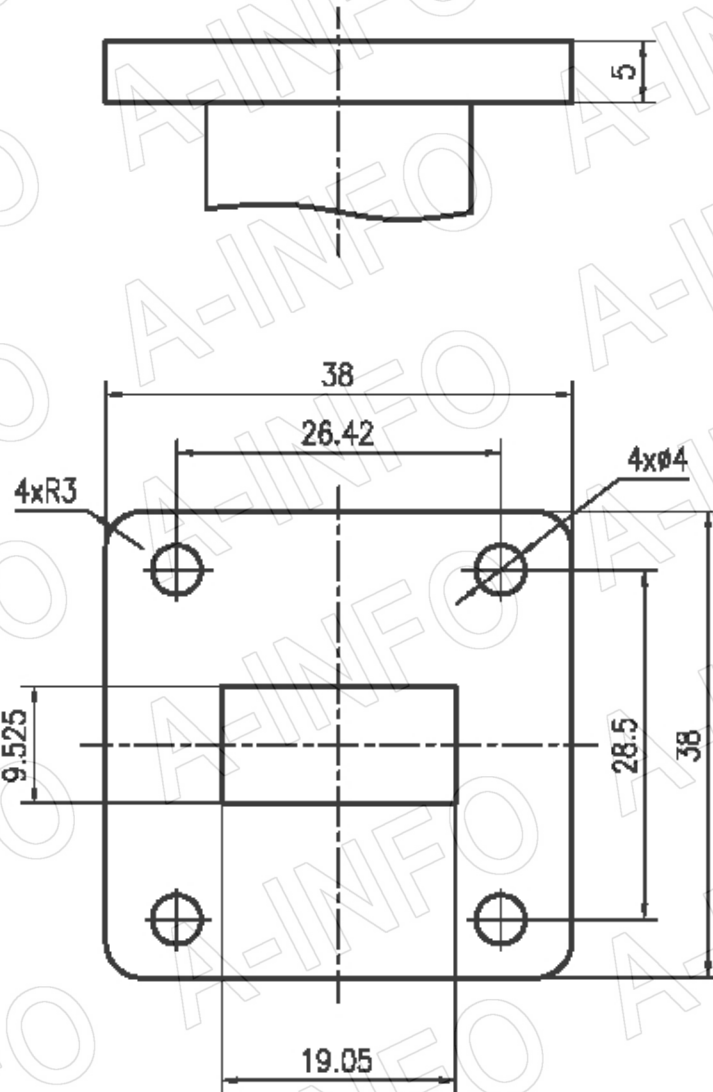

FBP120

Test Results

Attenuation (I.L.: 0.5750dB/m Max.)

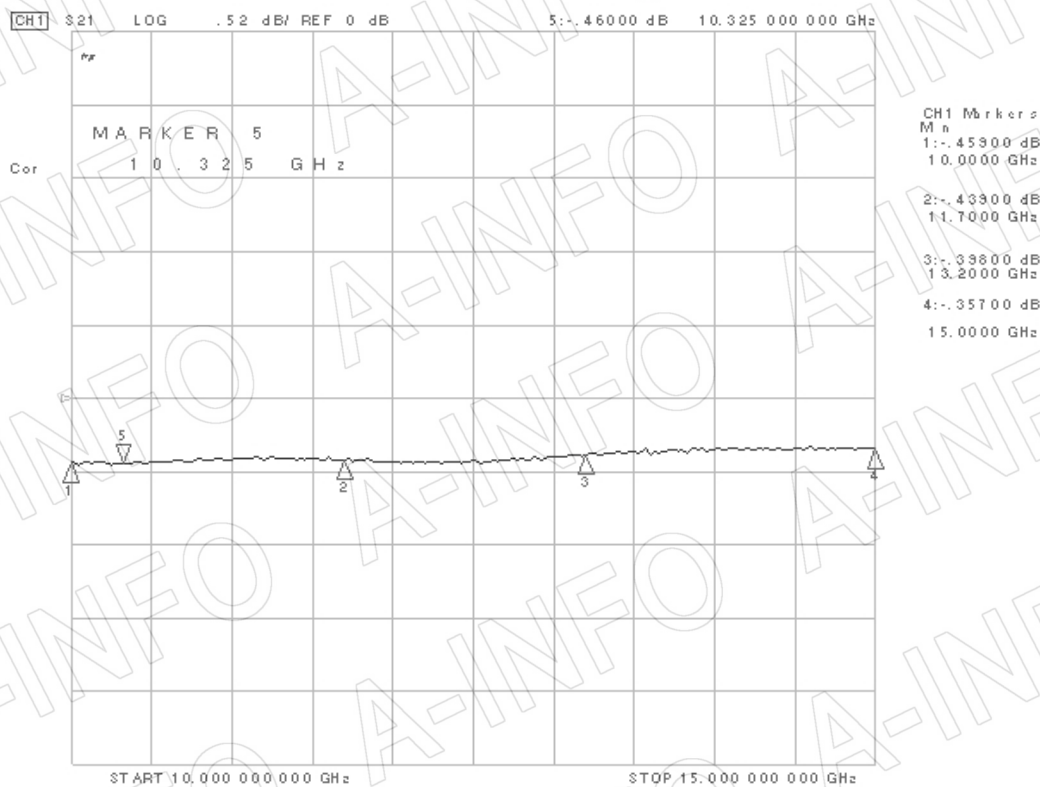

VSWR

