


For reference only. See data sheet for the detailed specifications.

Technical Specification



EIA WR to WR	WR22 to WR8
Frequency Range(GHz)	WR22: 33.0 – 50.0
	WR8: 90.0 – 140.0
Length(mm/inch)	45.7/1.8
Insertion Loss(dB)	0.8 Max.
VSWR	1.10:1 Max.
WR22 Flange	FUGP400(UG-383/U)
WR8 Flange	UG387/U-M
Material	Cu
Size(mm)	45.7 x 28.6 x 28.6
Net Weight(Kg)	0.04 Around

Outline Drawing (Size: mm)

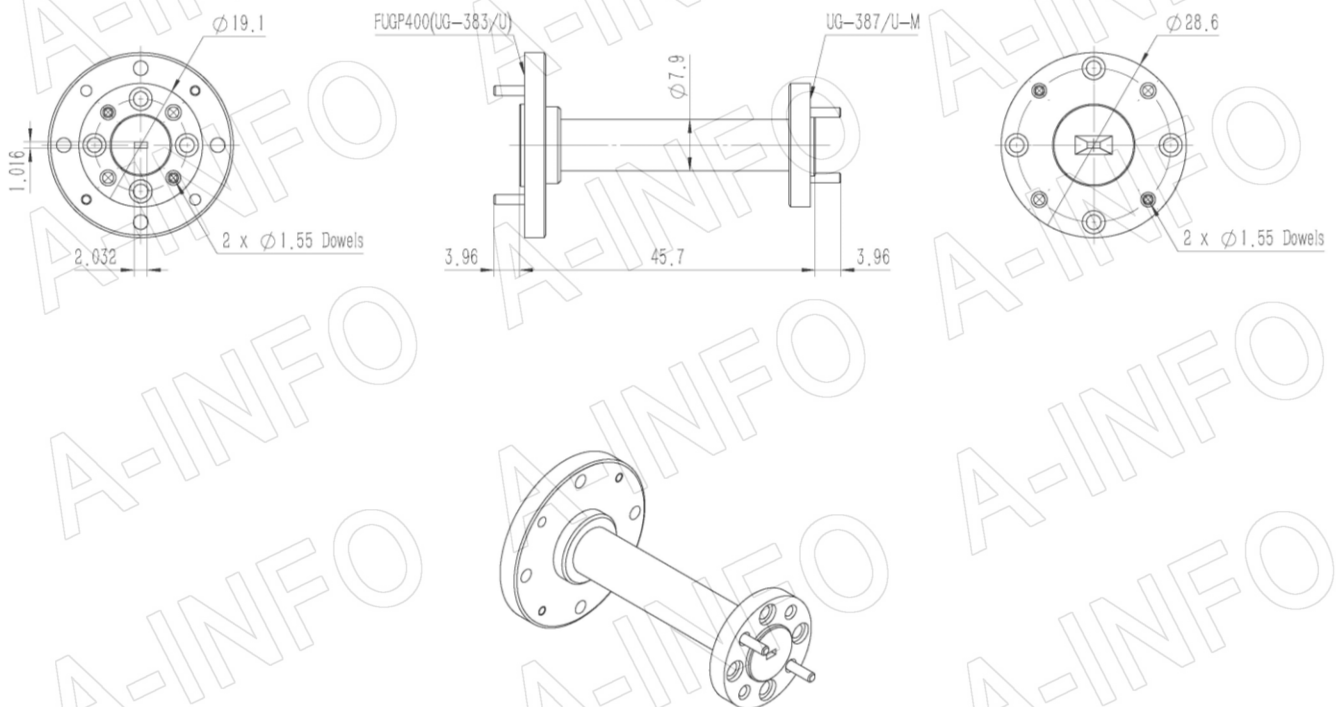

AINFO Inc.


Page 1 of 2

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-639-9688,


(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Outline Drawing (Size: mm)

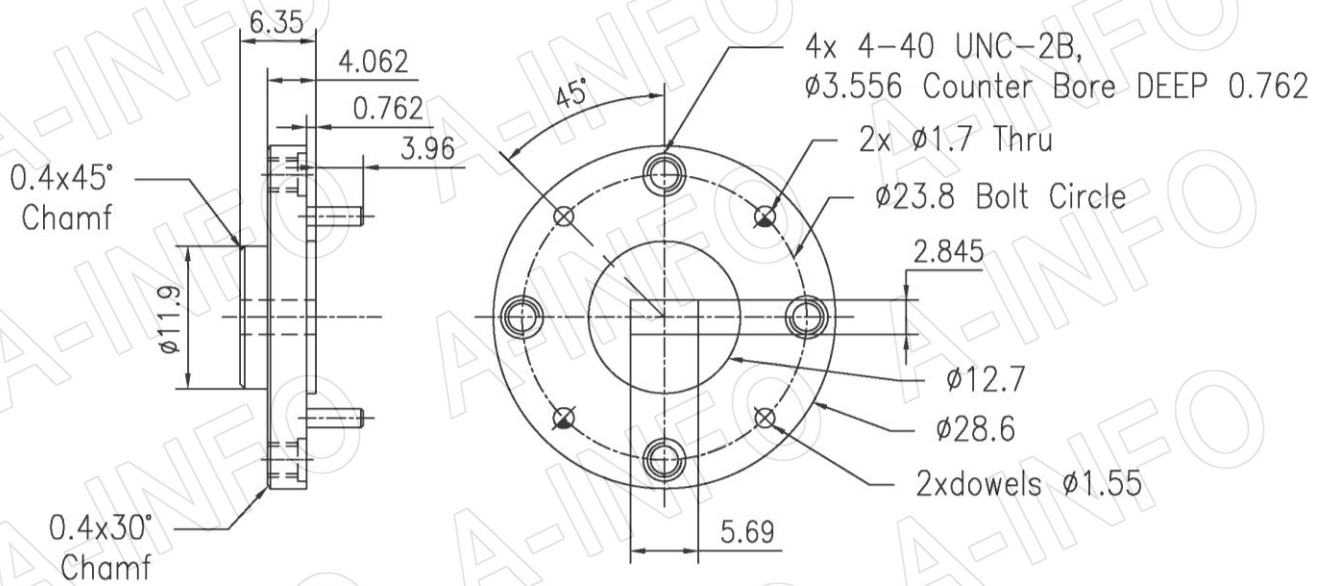

FUGP400
(equivalent to UG-383/U)

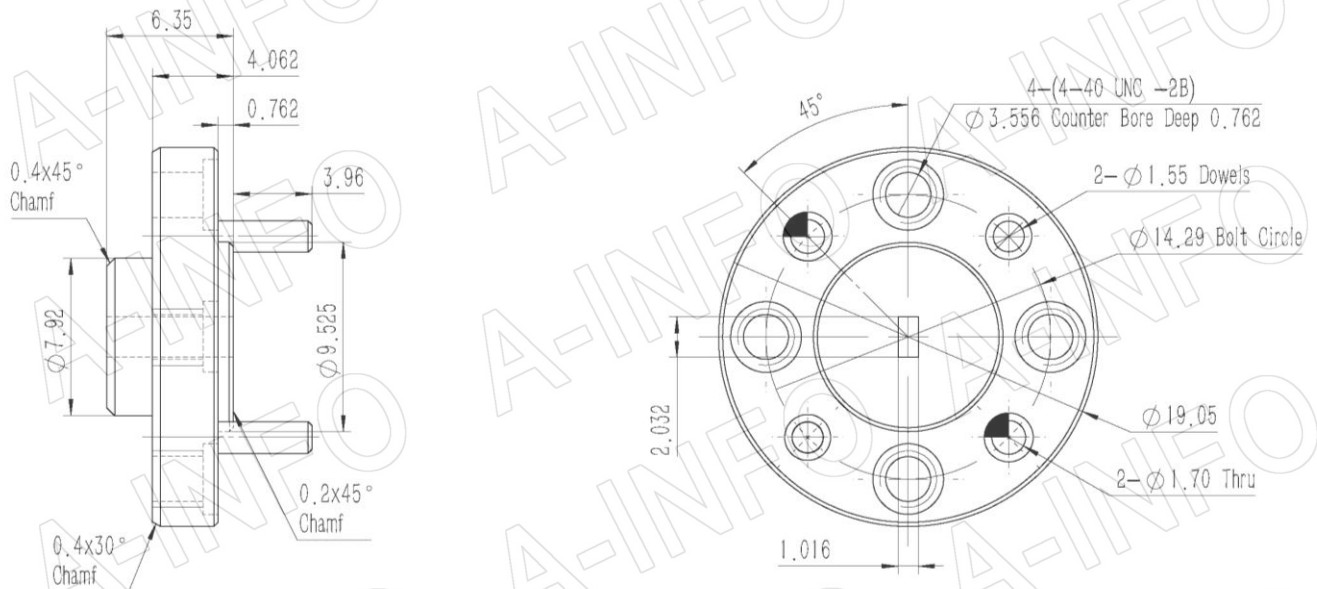

UG-387/U-M

AINFO Inc.

Page 2 of 2

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-639-9688,

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com