

2.92mm In-Series Adapters

Performance Features

Nominal Impedance: 50ohm

Frequency Range: DC-40GHz

Durability: 500 cycles

Operating Temperature: -55°C ~ +165°C


Materials/Finishes

Housing: Type 303 Stainless Steel- Polished & Passivated


Center Contact: Beryllium Copper Plated Gold
(MIL-G-45204)

Insulators: PEI


Interfaces: MIL-STD-348A

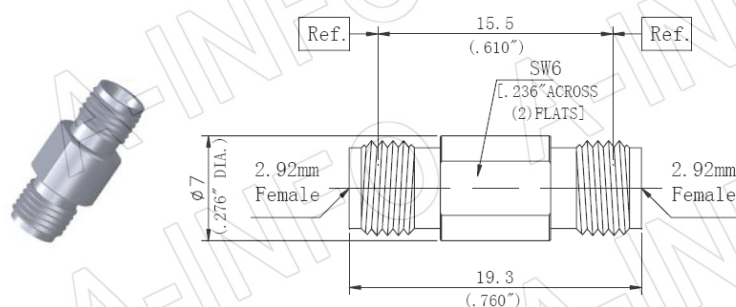


P/N	HPA114-01
Description	2.92mm/Female-2.92mm/Female
VSWR	DC-40GHz...1.20:1 max

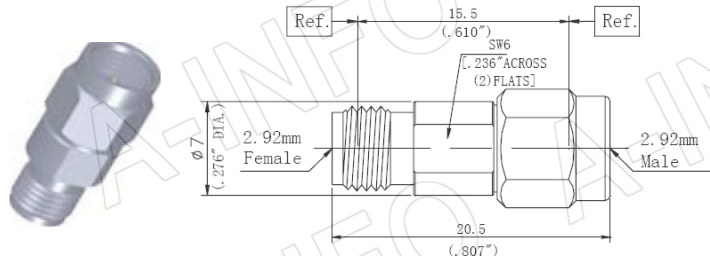


P/N	HPA114-02
Description	2.92mm/Male-2.92mm/Female
VSWR	DC-40GHz...1.15:1 max

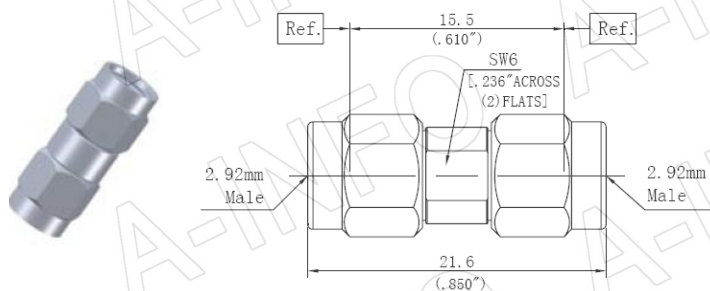


P/N	HPA114-03
Description	2.92mm/Male-2.92mm/Male
VSWR	DC-40GHz...1.15:1 max

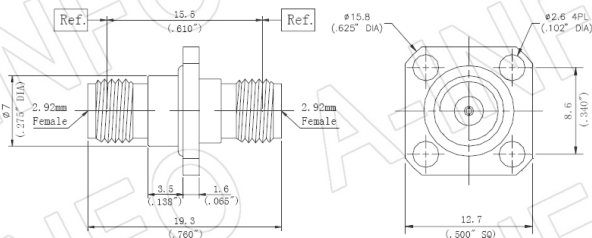


P/N	HPA114-04
Description	2.92mm/Female-2.92mm/Female
VSWR	DC-40GHz...1.20:1 max

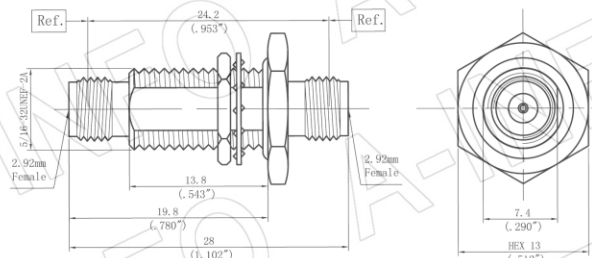

P/N	HPA114-05
Description	2.92mm/Female-2.92mm/Female
VSWR	DC-40GHz...1.20:1 max

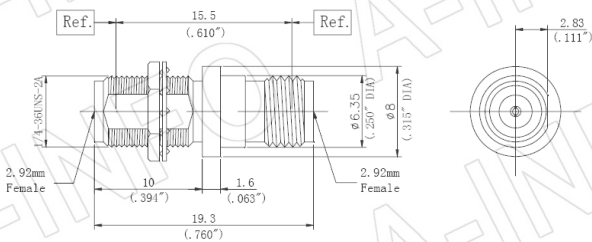

P/N	HPA114-06
Description	2.92mm/Female-2.92mm/Female
VSWR	DC-40GHz...1.20:1 max

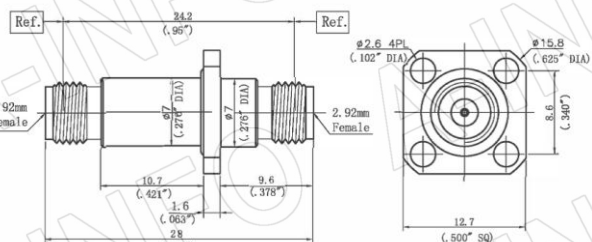

P/N	HPA114-07
Description	2.92mm/Female-2.92mm/Female
VSWR	DC-40GHz...1.20:1 max