

1.85mm In-Series Adapters

Performance Features

Nominal Impedance: 50ohm

Frequency Range: DC-65GHz

Durability: 500cycles

Operating Temperature: -55°C ~ +165°C


Materials/Finishes

Housing: Type 303 Stainless Steel – Polished & Passivated


Center Contact: Beryllium Copper Plated Gold
(MIL-G-45204)

Insulators: PEI


Interfaces: IEC-61169

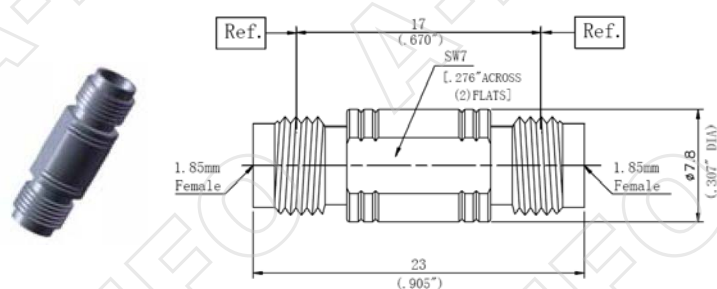

P/N	HPA118-01
Description	1.85mm/Female-1.85mm/Female
VSWR	DC-65GHz...1.25:1 max

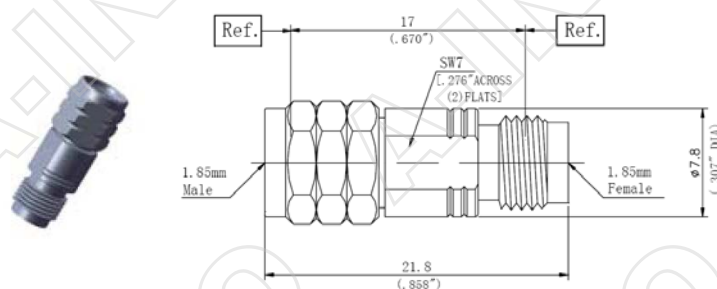

P/N	HPA118-02
Description	1.85mm/Male-1.85mm/Female
VSWR	DC-65GHz...1.25:1 max

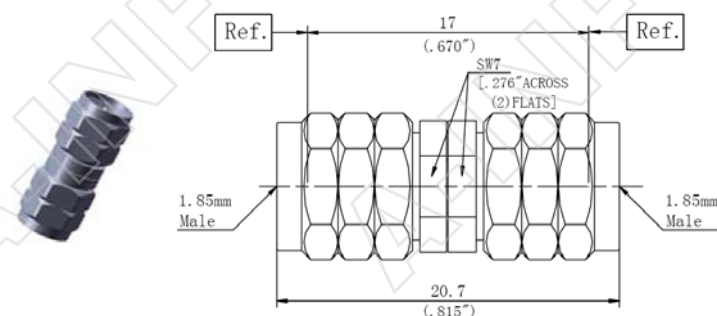

P/N	HPA118-03
Description	1.85mm/Male-1.85mm/Male
VSWR	DC-65GHz...1.25:1 max