

N-2.92mm Between Series Adapters

Performance Features

Nominal Impedance: 50ohm

Frequency Range: DC-18GHz

Durability: 500cycles

Operating Temperature: -55°C ~ +165°C


Materials/Finishes

Housing: Type 303 Stainless Steel – Polished & Passivated


Center Contact: Beryllium Copper Plated Gold
(MIL-G-45204)

Insulators: PEI


N/2.92mm Interfaces: MIL-STD-348A

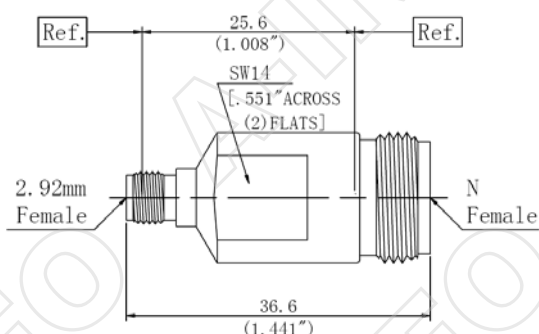


P/N	HPA122-01
Description	N/Female-2.92mm/Female
VSWR	DC-18GHz...1.15:1 max

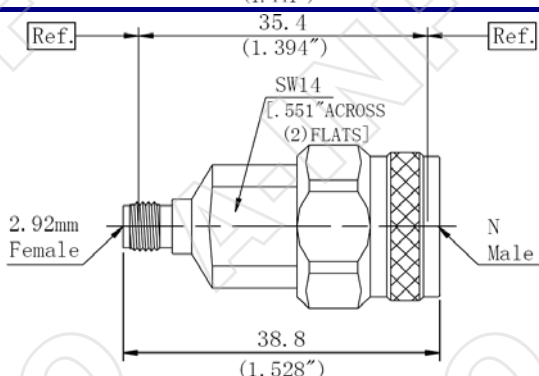

P/N	HPA122-02
Description	N/Male-2.92mm/Female
VSWR	DC-18GHz...1.15:1 max

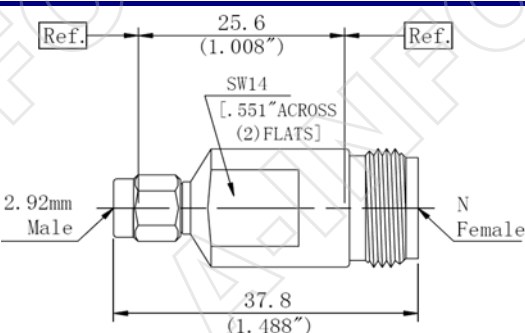

P/N	HPA122-03
Description	N/Female-2.92mm/Male
VSWR	DC-18GHz...1.15:1 max

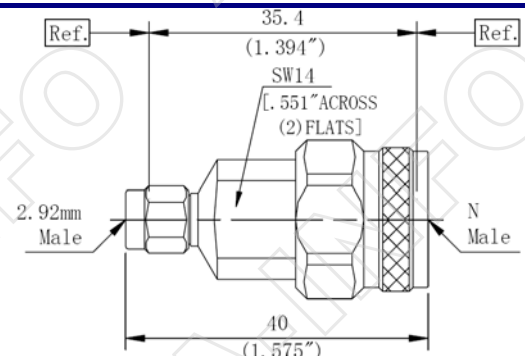

P/N	HPA122-04
Description	N/Male-2.92mm/Male
VSWR	DC-18GHz...1.15:1 max