

3.5mm-2.92mm Between Series Adapters

Performance Features

Nominal Impedance: 50ohm

Frequency Range: DC-33GHz

Durability: 500cycles

Operating Temperature: -55°C ~ +165°C

Materials/Finishes


Housing: Type 303 Stainless Steel – Polished & Passivated

Center Contact: Beryllium Copper Plated Gold
(MIL-G-45204)


Insulators: PEI

3.5mm Interfaces: IEC-60169


2.92mm Interfaces: MIL-STD-348A

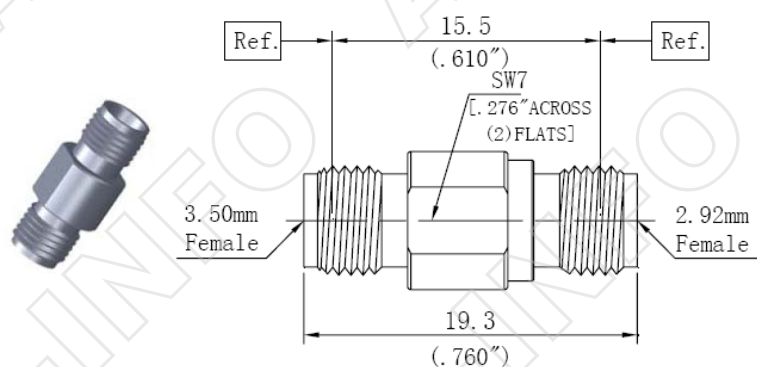

P/N	HPA131-01
Description	3.5mm/Female-2.92mm/Female
VSWR	DC-33GHz...1.15:1 max

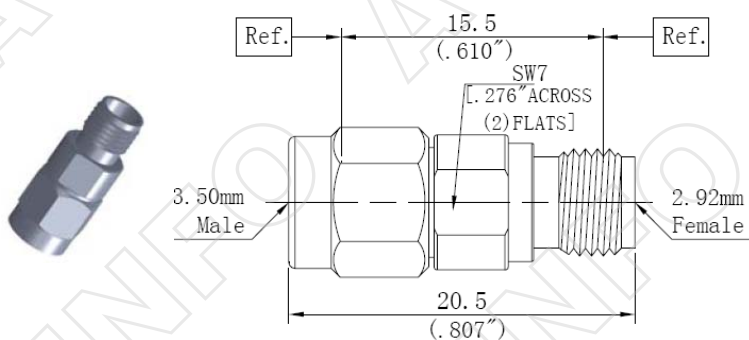


P/N	HPA131-02
Description	3.5mm/Male-2.92mm/Female
VSWR	DC-33GHz...1.15:1 max

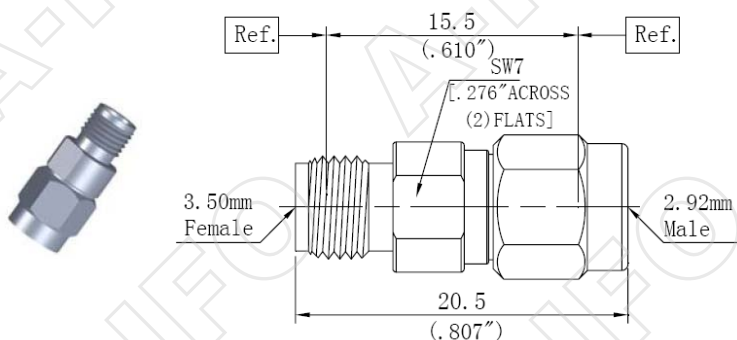


P/N	HPA131-03
Description	3.5mm/Female-2.92mm/Male
VSWR	DC-33GHz...1.15:1 max

3.5mm-2.92mm Adapters

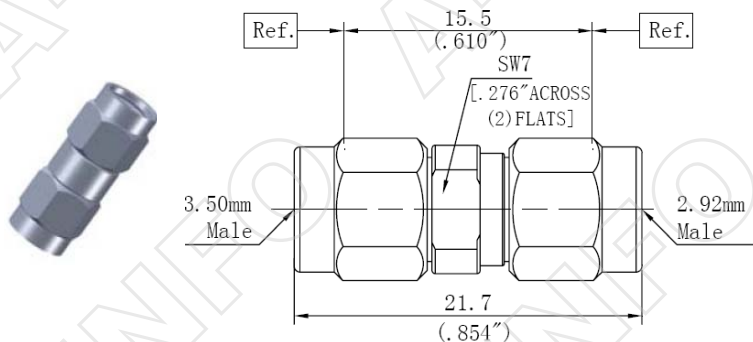

P/N	HPA131-04
Description	3.5mm/Male-2.92mm/Male
VSWR	DC-33GHz...1.15:1 max

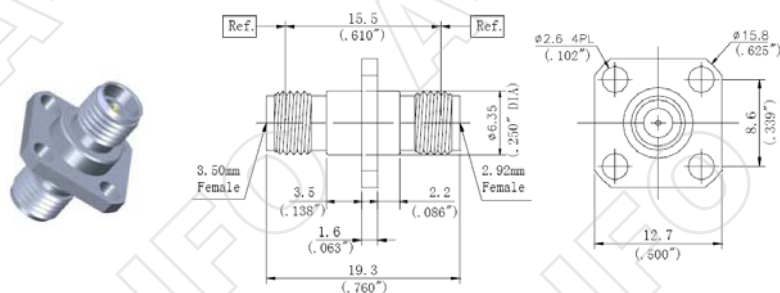

P/N	HPA131-05
Description	3.5mm/Female-2.92mm/Female
VSWR	DC-33GHz...1.15:1 max