

3.5mm-2.4mm Between Series Adapters

Performance Features

Nominal Impedance: 50ohm

Frequency Range: DC-33GHz

Durability: 500cycles

Operating Temperature: -55°C ~ +165°C

Materials/Finishes


Housing: Type 303 Stainless Steel – Polished & Passivated

Center Contact: Beryllium Copper Plated Gold (MIL-G-45204)


Insulators: PEI

3.5mm Interfaces: IEC-60169


2.4mm Interfaces: STD 287-2007

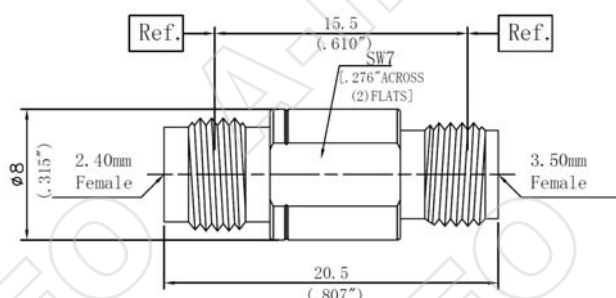


P/N	HPA132-01
Description	3.5mm/Female-2.4mm/Female
VSWR	DC-33GHz...1.15:1 max

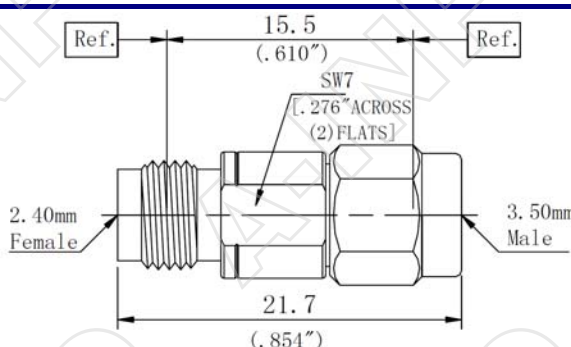

P/N	HPA132-02
Description	3.5mm/Male-2.4mm/Female
VSWR	DC-33GHz...1.15:1 max

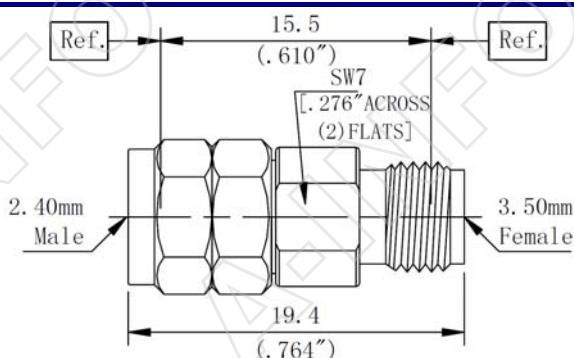

P/N	HPA132-03
Description	3.5mm/Female-2.4mm/Male
VSWR	DC-33GHz...1.15:1 max

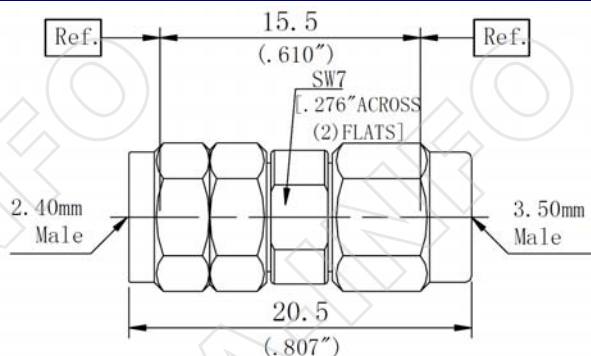

P/N	HPA132-04
Description	3.5mm/Male-2.4mm/Male
VSWR	DC-33GHz...1.15:1 max