

3.5mm-SMA Between Series Adapters

Performance Features

Nominal Impedance: 50ohm

Frequency Range: DC-27GHz

Durability: 500cycles

Operating Temperature: -55°C ~ +165°C

Materials/Finishes


Housing: Type 303 Stainless Steel – Polished & Passivated

Center Contact: Beryllium Copper Plated Gold
(MIL-G-45204)


Insulators: PEI & PTFE

3.5mm Interfaces: IEC-60169


SMA Interfaces: MIL-STD-348A

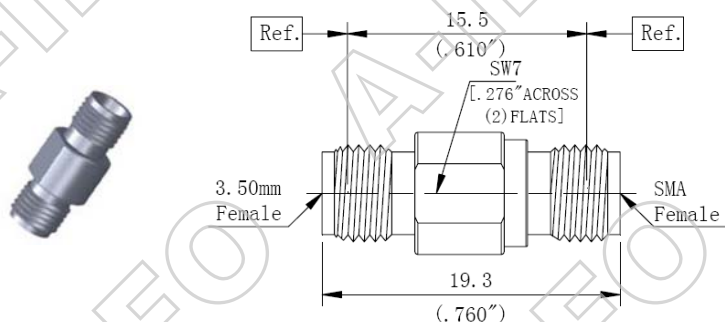


P/N	HPA133-01
Description	3.5mm/Female-SMA/Female
VSWR	DC-27GHz...1.15:1 max

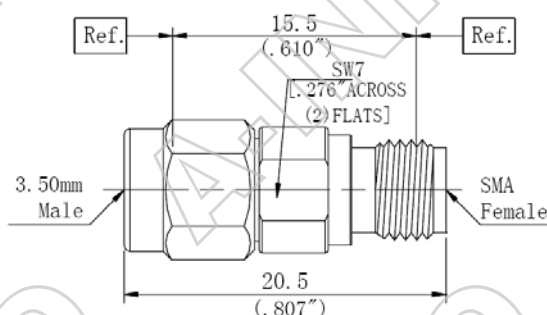

P/N	HPA133-02
Description	3.5mm/Male-SMA/Female
VSWR	DC-27GHz...1.15:1 max

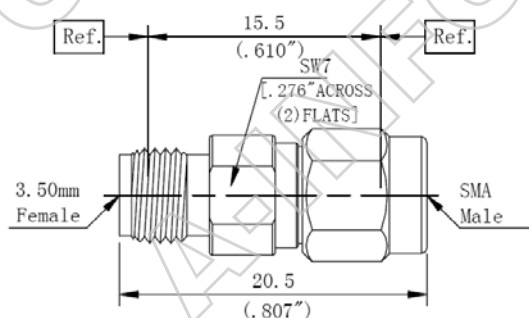

P/N	HPA133-03
Description	3.5mm/Female-SMA/Male
VSWR	DC-27GHz...1.15:1 max

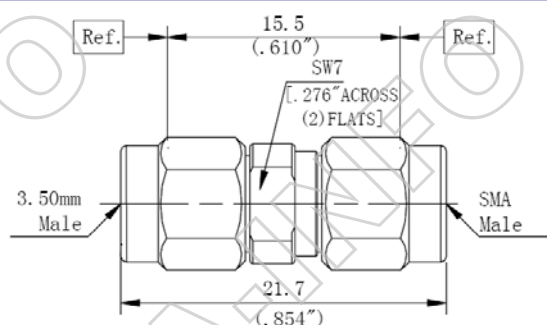

P/N	HPA133-04
Description	3.5mm/Male-SMA/Male
VSWR	DC-27GHz...1.15:1 max