

2.92mm-1.85mm Between Series Adapters

Performance Features

Nominal Impedance: 50ohm

Frequency Range: DC-40GHz

Durability: 500cycles

Operating Temperature: -55°C ~ +165°C

Materials/Finishes


Housing: Type 303 Stainless Steel – Passivated

Center Contact: Beryllium Copper Plated Gold (MIL-G-45204)


Insulators: PEI

2.92mm Interfaces: MIL-STD-348A


1.85mm Interfaces: IEC-61169

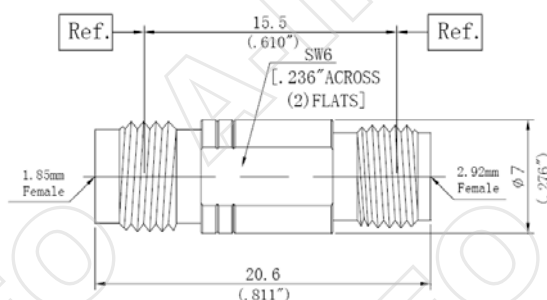


P/N	HPA153-01
Description	2.92mm/Female-1.85/Female
VSWR	DC-40GHz...1.20:1 max

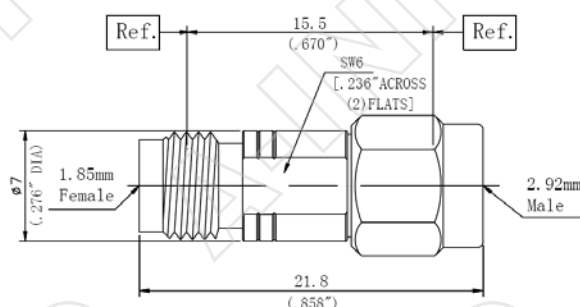

P/N	HPA153-02
Description	2.92mm/Male-1.85/Female
VSWR	DC-40GHz...1.15:1 max

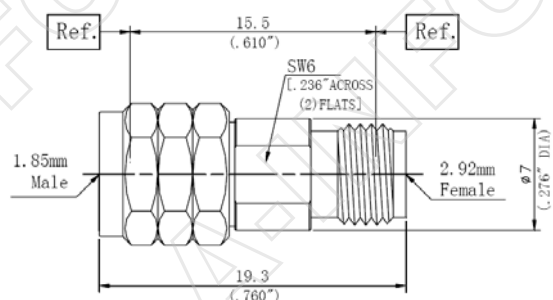

P/N	HPA153-03
Description	2.92mm/Female-1.85/Male
VSWR	DC-40GHz...1.15:1 max

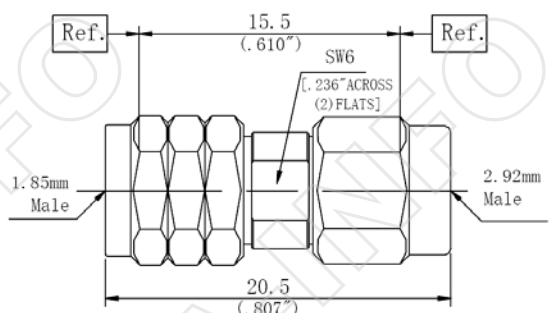

P/N	HPA153-04
Description	2.92mm/Male-1.85/Male
VSWR	DC-40GHz...1.15:1 max