

2.4mm-1.85mm Between Series Adapters

Performance Features

Nominal Impedance: 50ohm

Frequency Range: DC-50GHz

Durability: 500cycles

Operating Temperature: -55°C ~ +165°C

Materials/Finishes


Housing: Type 303 Stainless Steel – Passivated

Center Contact: Beryllium Copper Plated Gold
(MIL-G-45204)


Insulators: PEI

2.4mm Interfaces: STD 287-2007


1.85mm Interfaces: IEC-61169

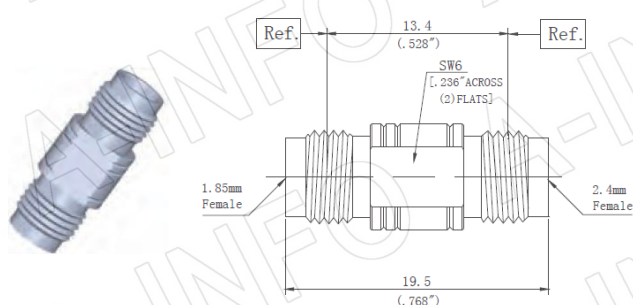


P/N	HPA162-01
Description	2.4mm/Female-1.85/Female
VSWR	DC-50GHz...1.25:1 max

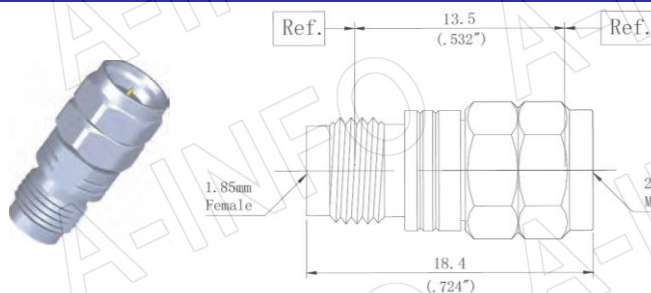

P/N	HPA162-02
Description	2.4mm/Male-1.85/Female
VSWR	DC-50GHz...1.25:1 max

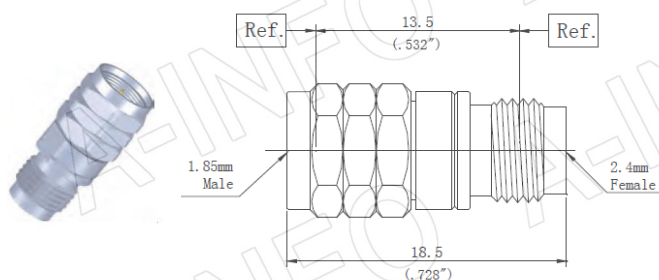

P/N	HPA162-03
Description	2.4mm/Female-1.85/Male
VSWR	DC-50GHz...1.25:1 max

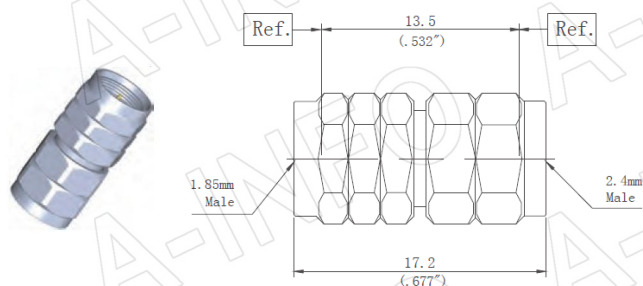

P/N	HPA162-04
Description	2.4mm/Male-1.85/Male
VSWR	DC-50GHz...1.25:1 max