

Quick Replacement Adapters

Performance Features

Nominal Impedance: 50ohm

Durability: 500cycles

Operating Temperature: -55°C ~ +165°C


Materials/Finishes

Housing: Type 303 Stainless Steel-Polished & Passivated


Center Contact: Beryllium Copper Plated Gold
(MIL-G-45204)

Insulators: PEI or PEI & PTFE


N/SMA Interfaces: MIL-STD-348A

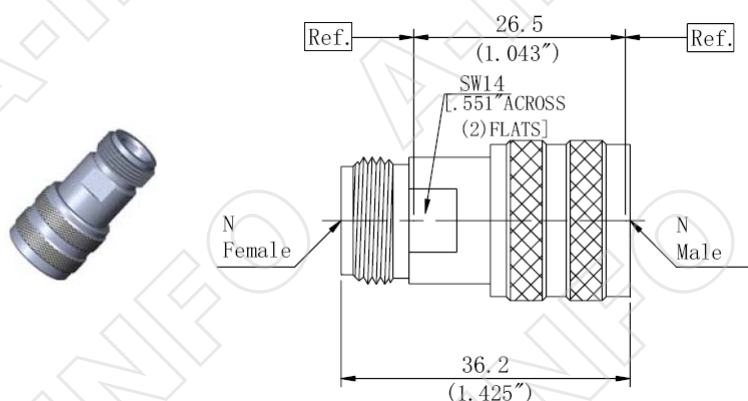

P/N	HPA191-01
Description	N/Male-N/Female
VSWR	DC-18GHz...1.15:1 max

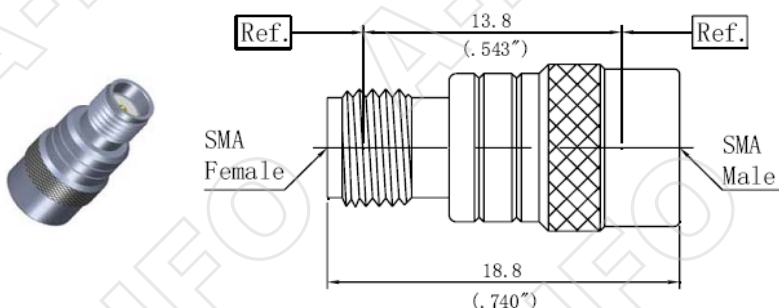

P/N	HPA191-02
Description	SMA/Male-SMA/Female
VSWR	DC-27GHz...1.20:1 max

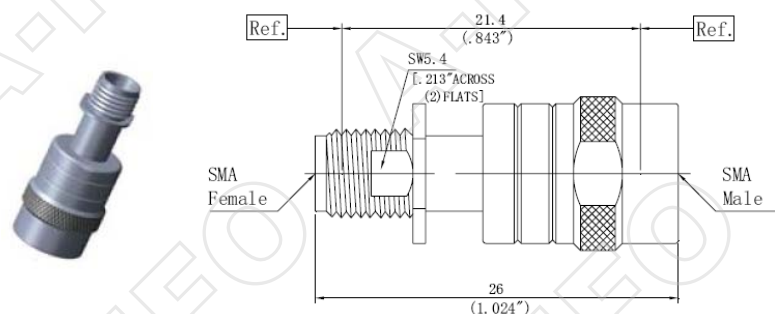

P/N	HPA191-03
Description	SMA/Male-SMA/Female
VSWR	DC-27GHz...1.25:1 max