



For reference only. See data sheet for the detailed specifications.

Technical Specification



EIA WRD to WRD	WRD650 to WRD750
Frequency Range(GHz)	7.5 – 18.0
Length(mm/inch)	152.4/6
Insertion Loss(dB)	0.2 Max.
VSWR	1.15:1 Max.
WRD650 Flange	FPWRD650D28
WRD750 Flange	FPWRD750D24
Material	Cu
Size(mm)	152.4 x 35 x 35
Net Weight(Kg)	0.48 Around

Outline Drawing (Size: mm)

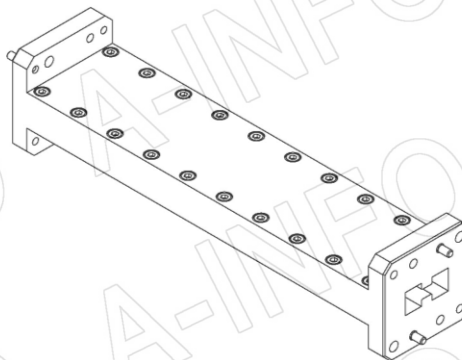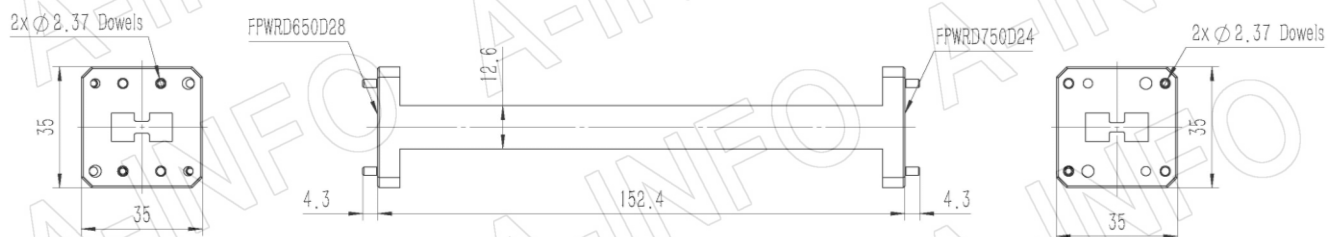

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

Page 1 of 3


(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Outline Drawing (Size: mm)


FMWRD650D28

(With two through mounting holes
and two screws holes)

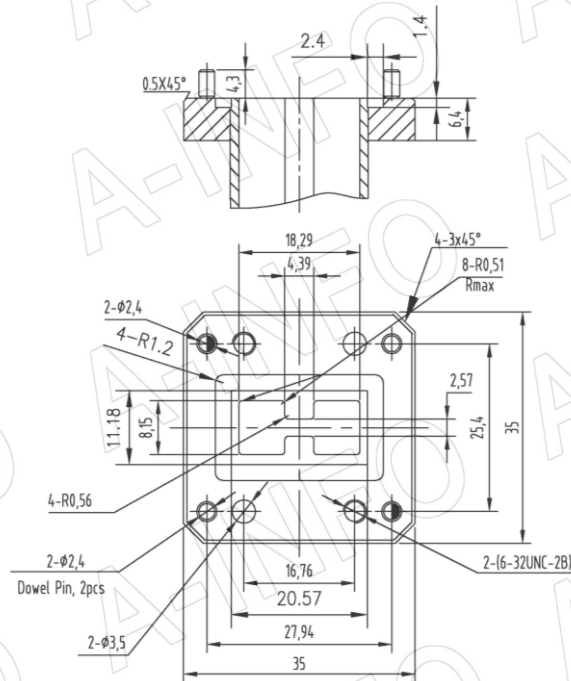

FMWRD750D24

(With two through mounting holes
and two screws holes)

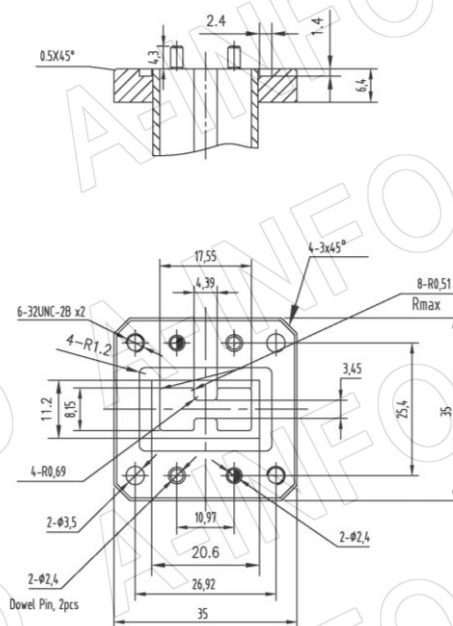

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,


Page 2 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Result

Insertion Loss (Test with two transitions back to back)

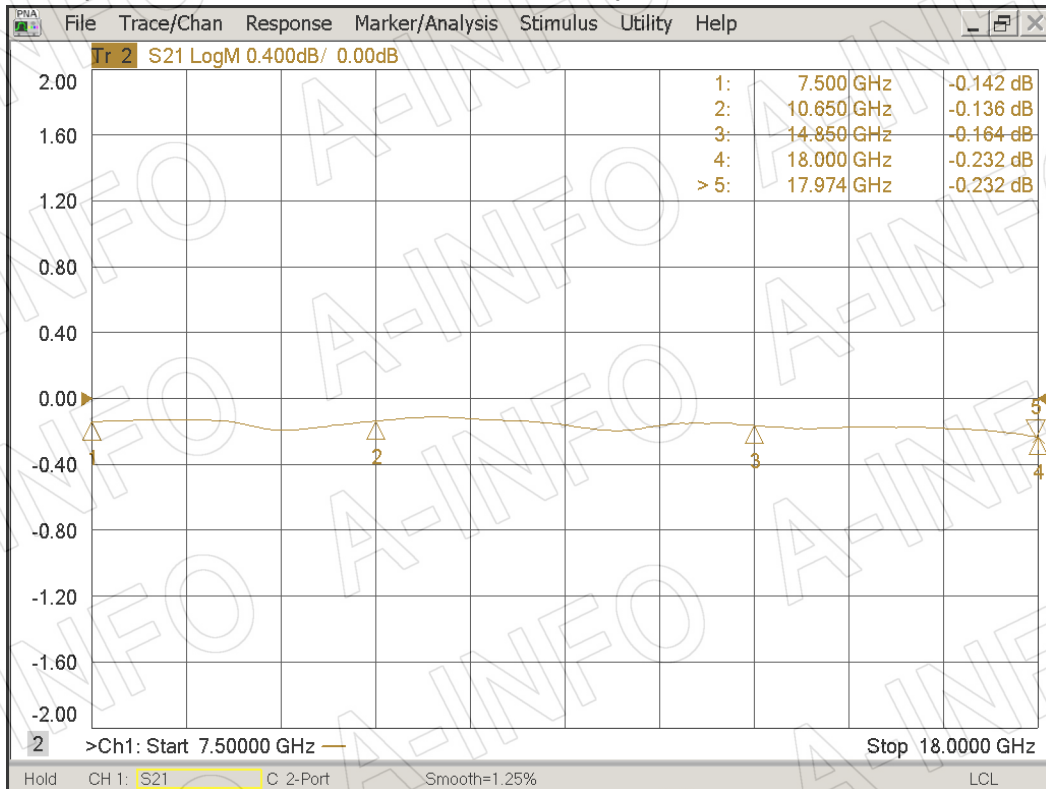

VSWR

