


For reference only. See data sheet for the detailed specifications.

Technical Specification



Freq. Range(GHz)	2.0 – 8.0
Coupling(dB)	30
Accuracy(dB)	±1.0 Max
Directivity(dB)	20 Min.
Insertion Loss(dB)	0.5 Max.
Mainline VSWR	1.25:1 Max.
Coupled VSWR	1.25:1 Max.
Power Handling(W CW)	50
Peak Power(KW)	3
Connector	SMA-Female
Operating Temp.(°C)	-55~+85
Material	Al
Size(mm)	43 x 12.7 x 17
Net Weight(Kg)	0.04 Around

Outline Drawing (Size: mm)

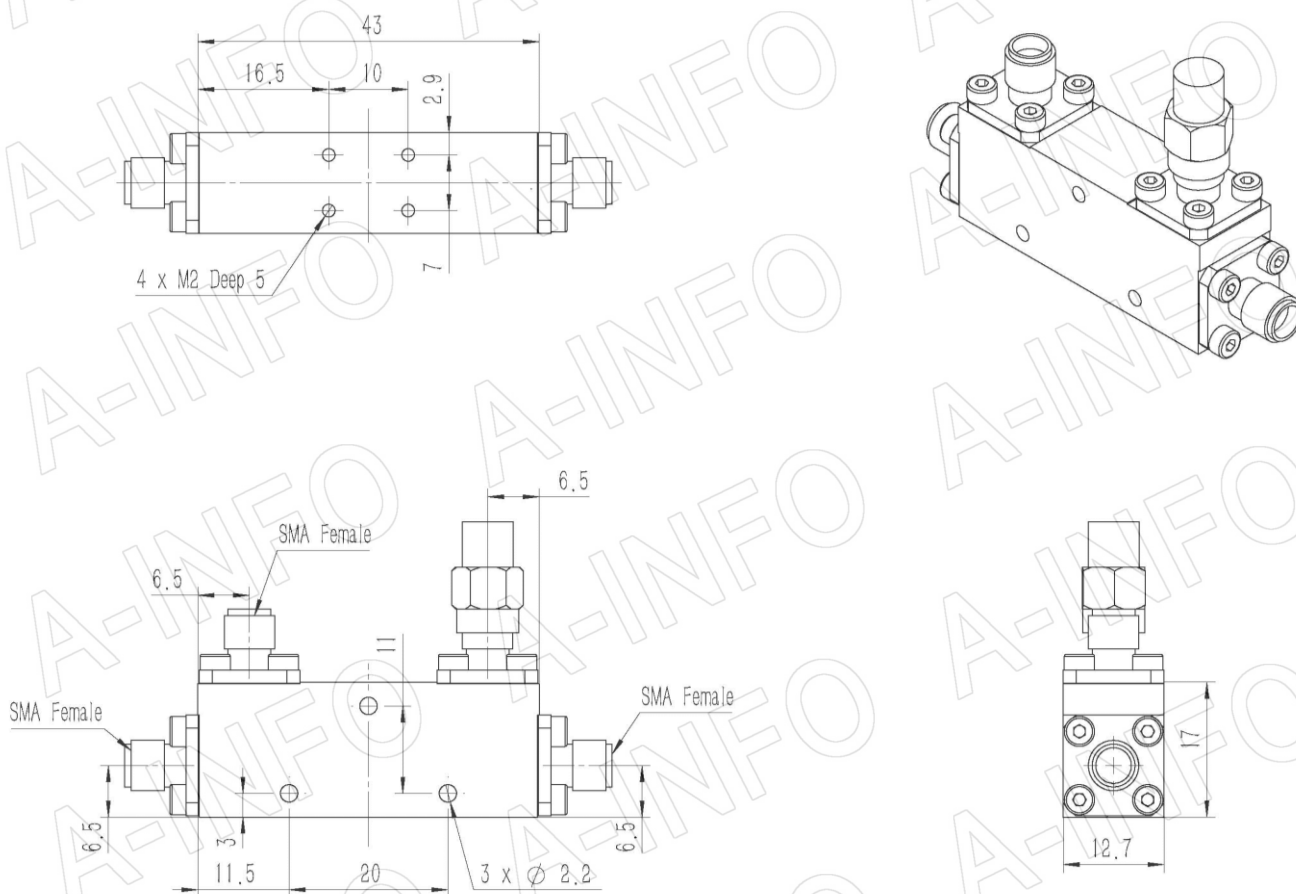

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-639-9688,


Page 1 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

Coupling & VSWR

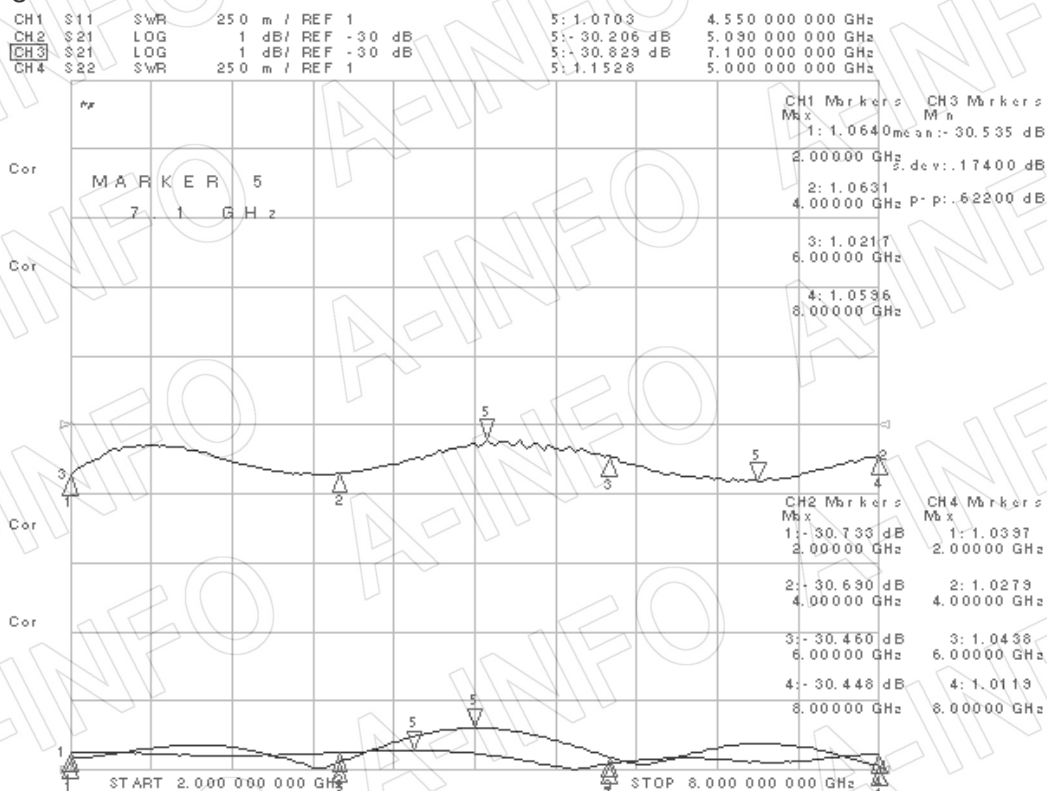

Directivity

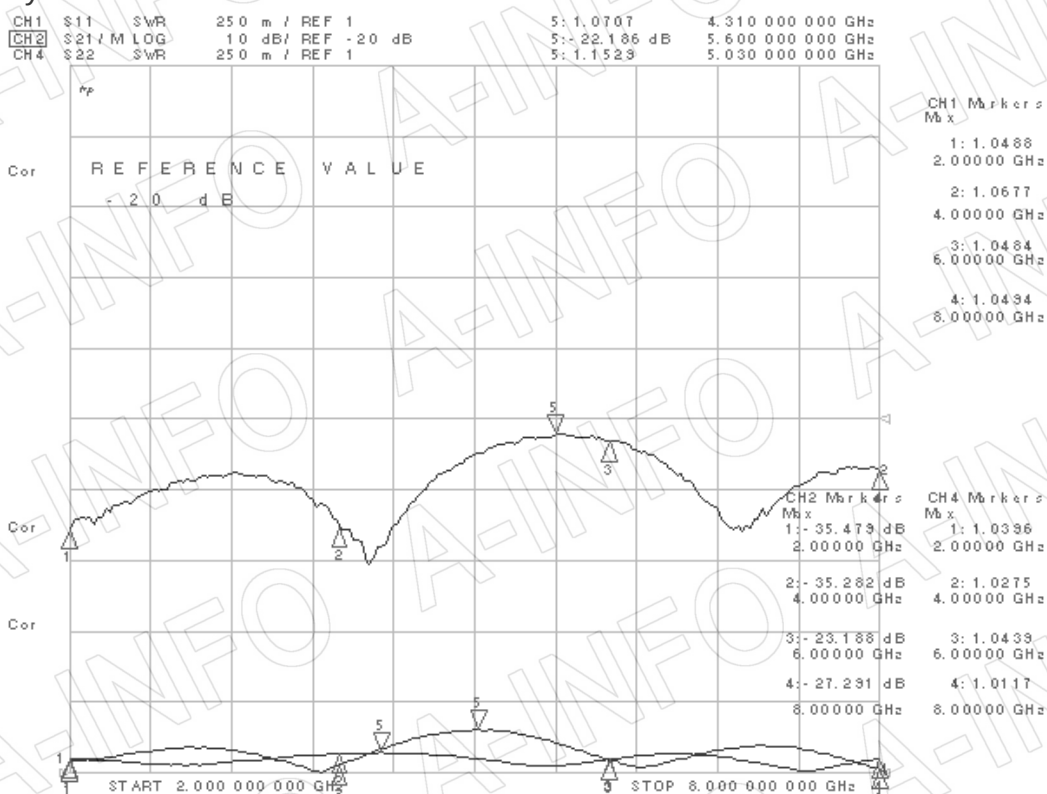

I.L. & VSWR

