





For reference only. See data sheet for the detailed specifications.

Technical Specification




Freq. Range(GHz)	1.0 – 26.5
Coupling(dB)	30
Accuracy(dB)	±0.8 Max
Directivity(dB)	13 Min.
Insertion Loss(dB)	1.2 Max.
Mainline VSWR	1.50:1 Max.
Coupled VSWR	1.50:1 Max.
Average Power(W CW)	20
Peak Power(KW)	3
Connector	SMA-Female
Operating Temp.(°C)	-55~+85
Material	Al
Size(mm)	88.9 x 12.7 x 17.8
Net Weight(Kg)	0.08 Around

Outline Drawing (Size: mm)

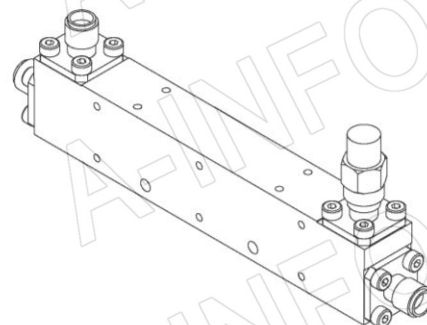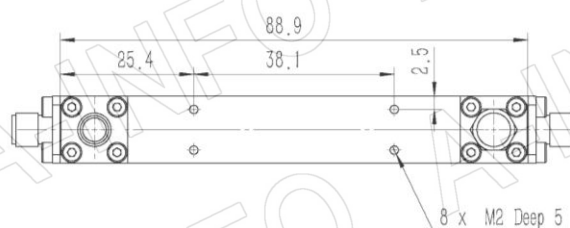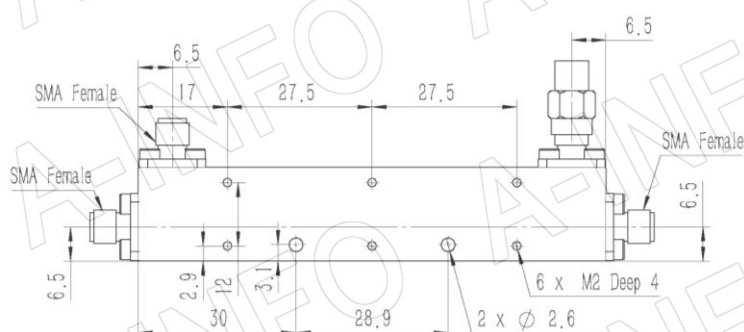


Test Results

Coupling & VSWR

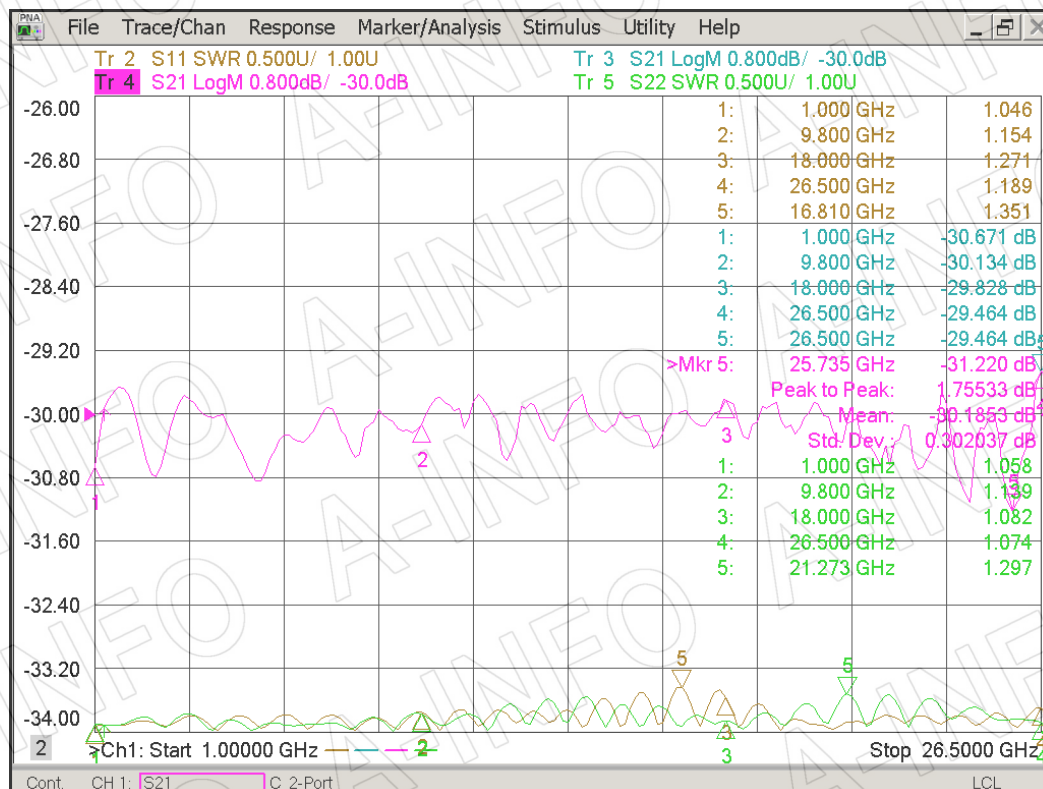

Directivity

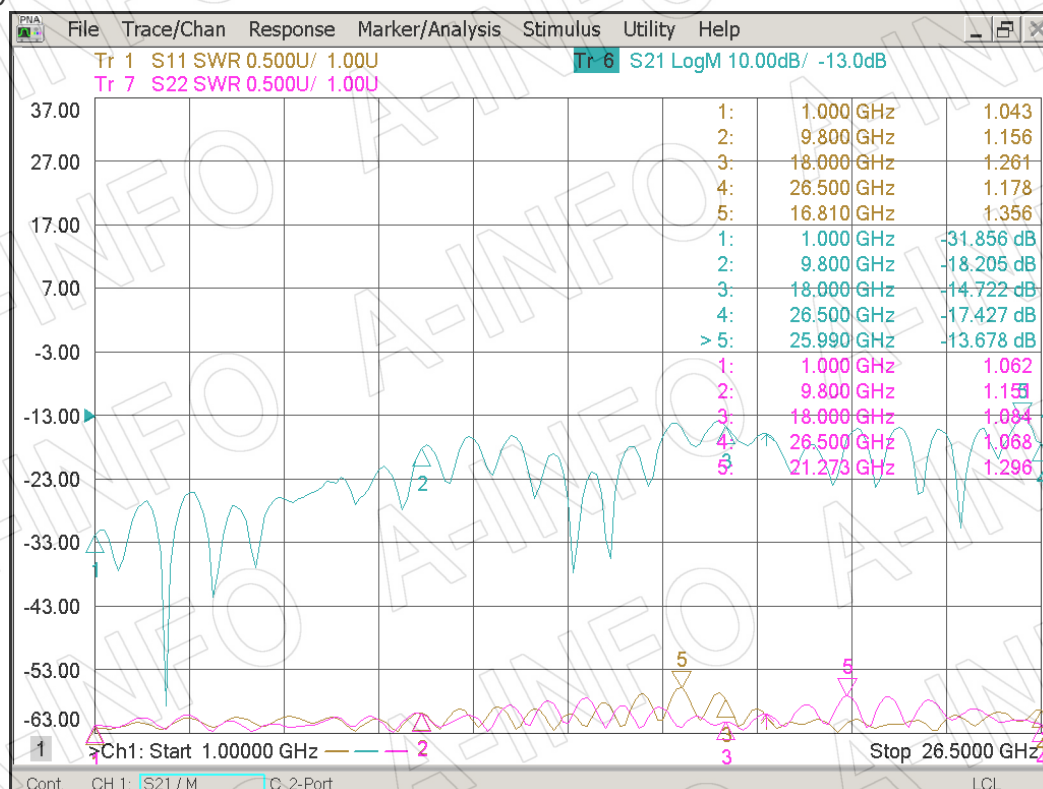

I.L. & VSWR

