


For reference only. See data sheet for the detailed specifications.

Technical Specification

Frequency Range(GHz)	8.9 – 11.7
Waveguide	WR90
Gain(dBic)	25 Typ.
Polarization	Dual Circular
Axial Ratio(dB)	1.0 Typ. ; 2.0 Max.
3dB Beamwidth(deg)	E Plane: 9 Typ.
	H Plane: 9 Typ.
Port to Port Isolation(dB)	35 Typ. ; 25 Min.
VSWR	A Type: 1.60:1 Max.
	C Type: 1.60:1 Max.
Output	A Type: FBP100(UBR100)
	C Type: SMA-Female or N-Female or TNC-Female or 7mm or 3.5mm-Female
Material	Al
Finish	Silver Plated and Chemical Conversion Coating, Gray Paint
Size(mm)	A Type: 242 x 242 x 831.7
	C Type: 242 x 242 x 837.1
Net Weight(Kg)	A Type: 5.23 Around
	C Type: 5.27 Around

Outline Drawing (Size: mm)

FBP100 Output (P/N: LB-CNH-90-25-D16-A)

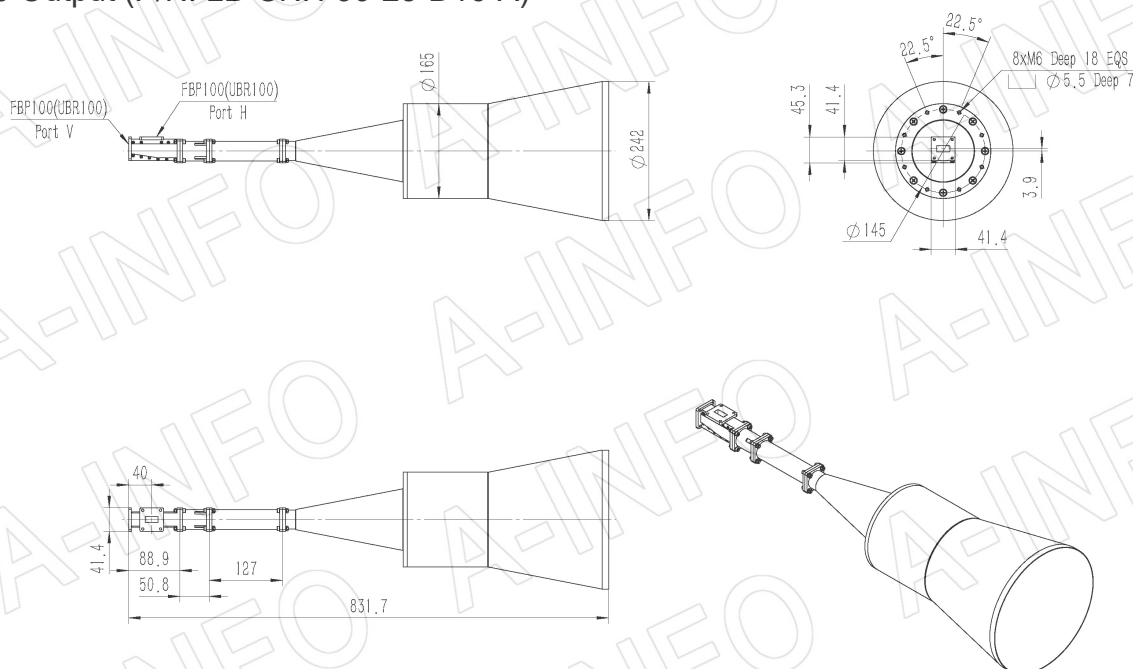

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608




Page 1 of 11

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com




SMA-Female Output (P/N: LB-CNH-90-25-D16-C-SF)

For N-Female, TNC- Female, 7mm or 3.5mm-Female output outline drawing, please contact A-INFO.

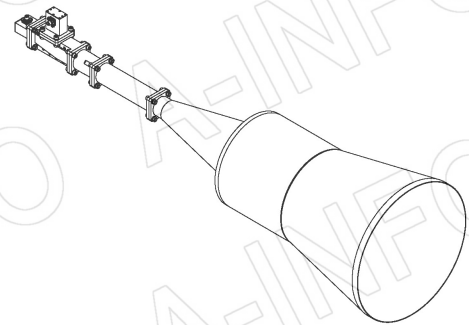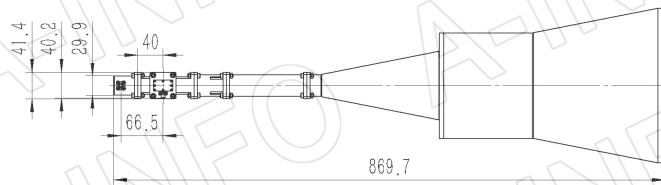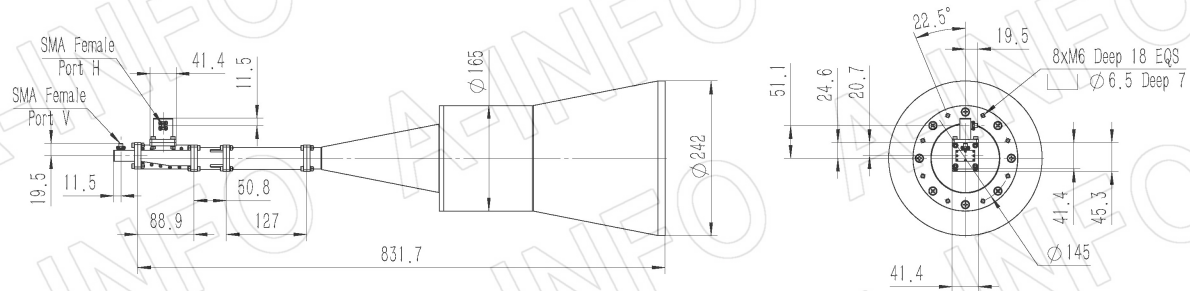


SMA-Female Output with Round Mounting Bracket (Option, P/N: LB-CNH-90-25-MB)

For N-Female, TNC- Female, 7mm or 3.5mm-Female output outline drawing, please contact A-INFO.

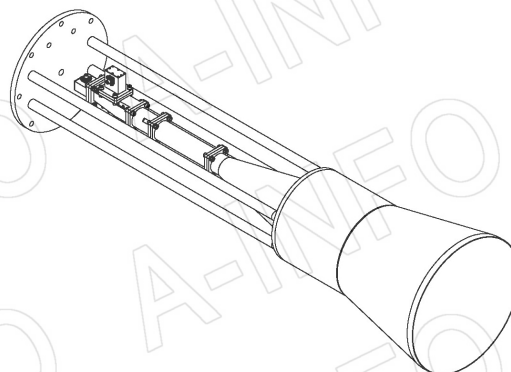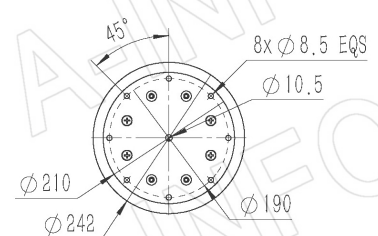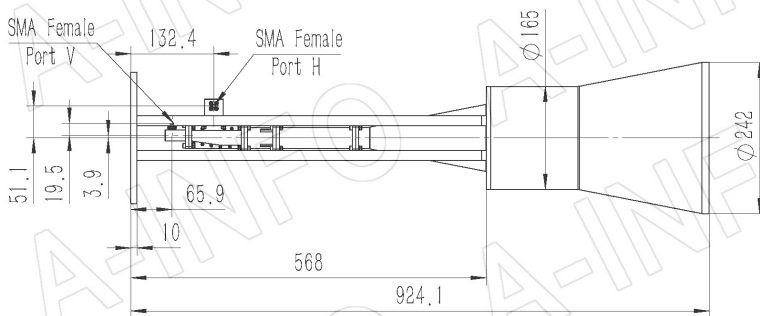


SMA-Female Output with L Type Mounting Bracket (Option, P/N: LB-CNH-90-25-L)

For N-Female, TNC- Female, 7mm or 3.5mm-Female output outline drawing, please contact A-INFO.

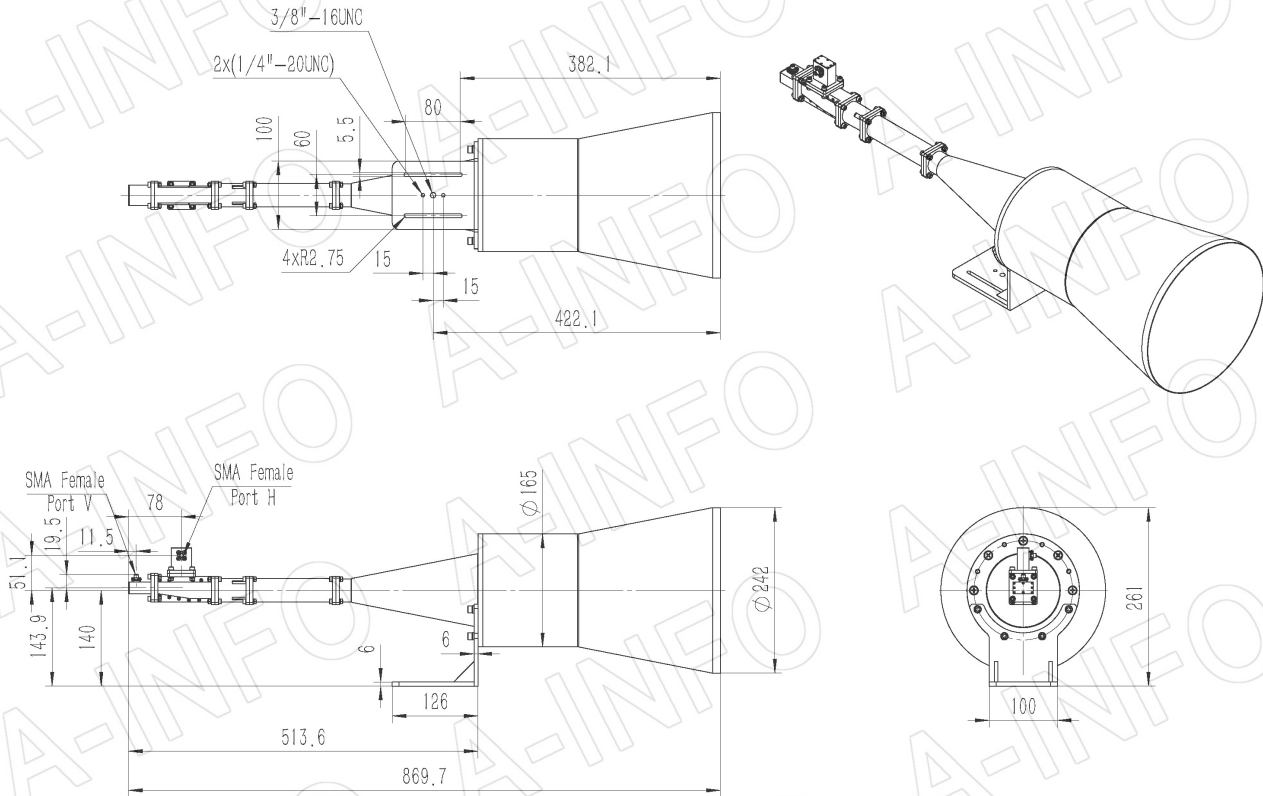

Flange Drawing (Size: mm)

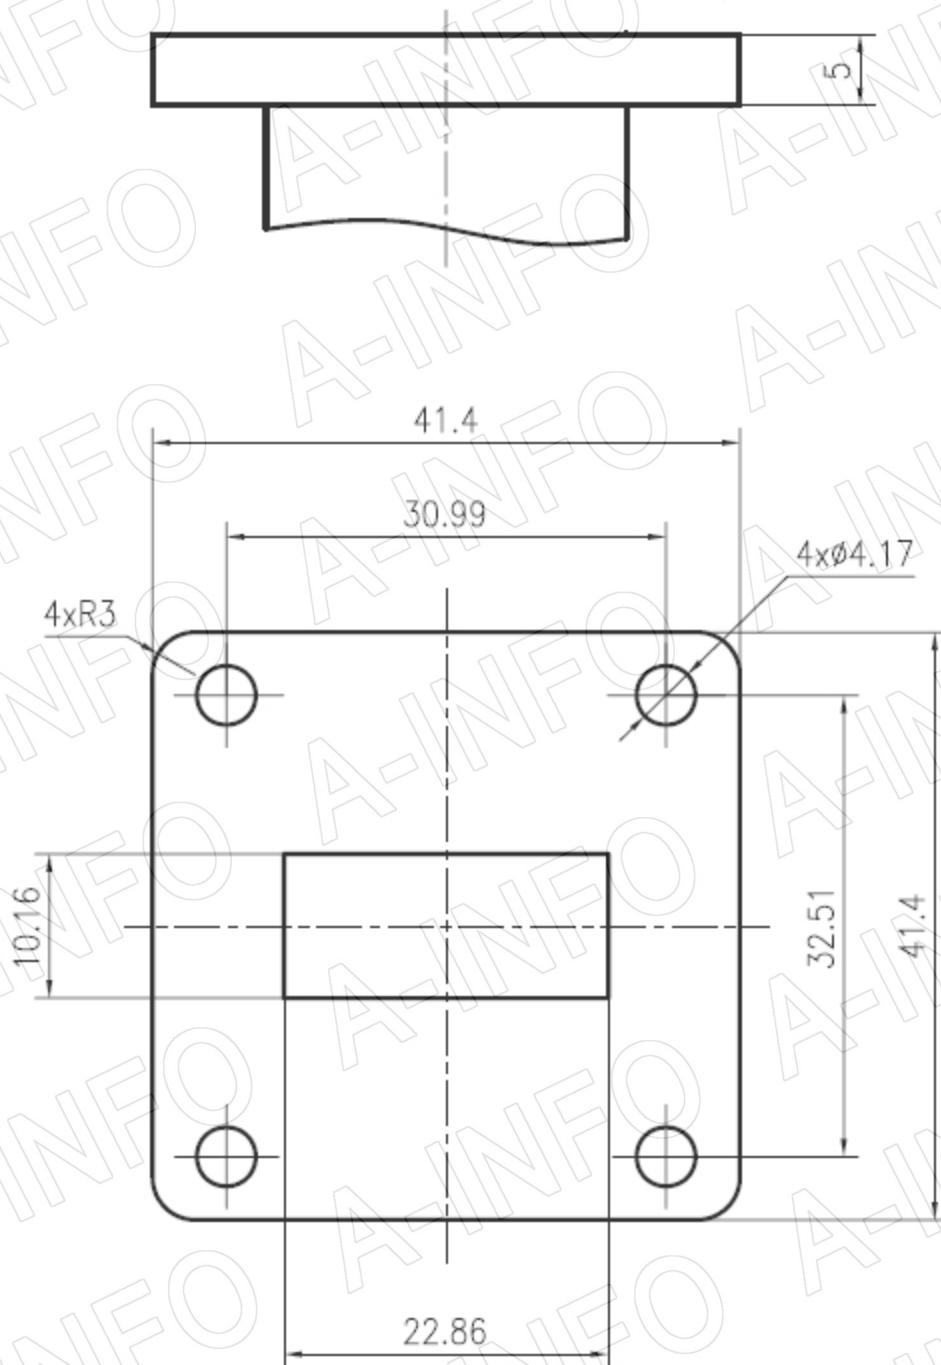

FBP100

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,


Page 4 of 11

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results


1. Gain

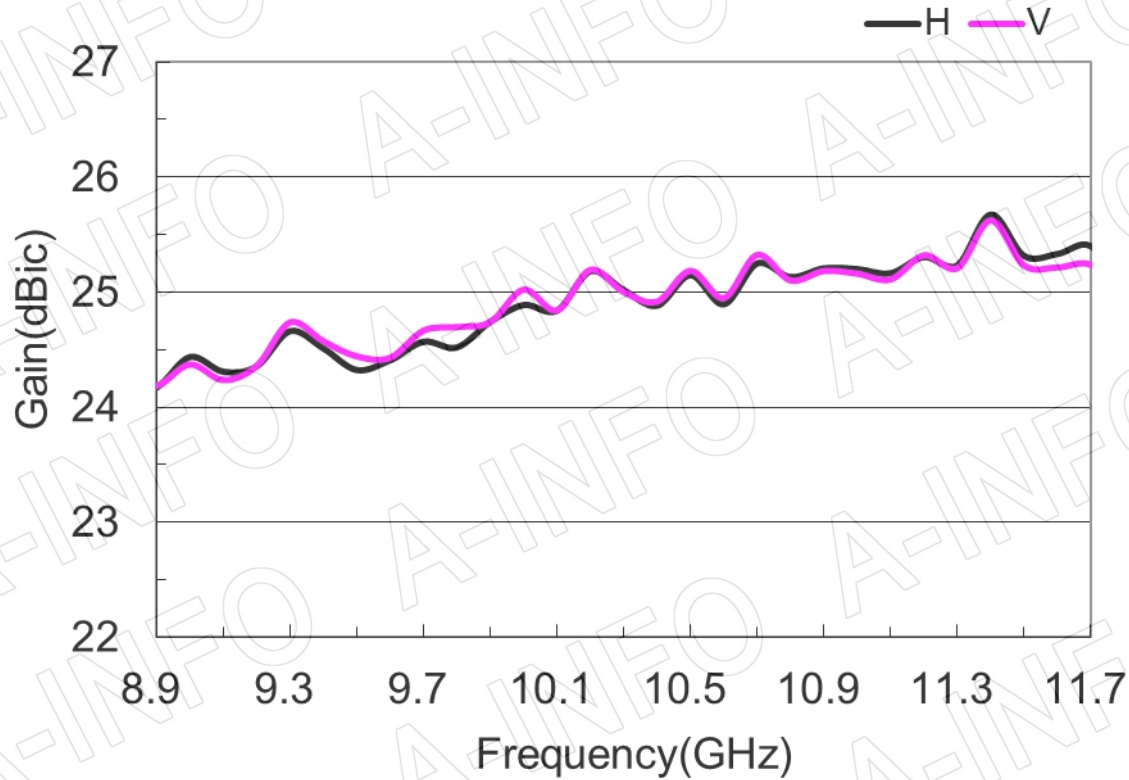


2. Axial Ratio

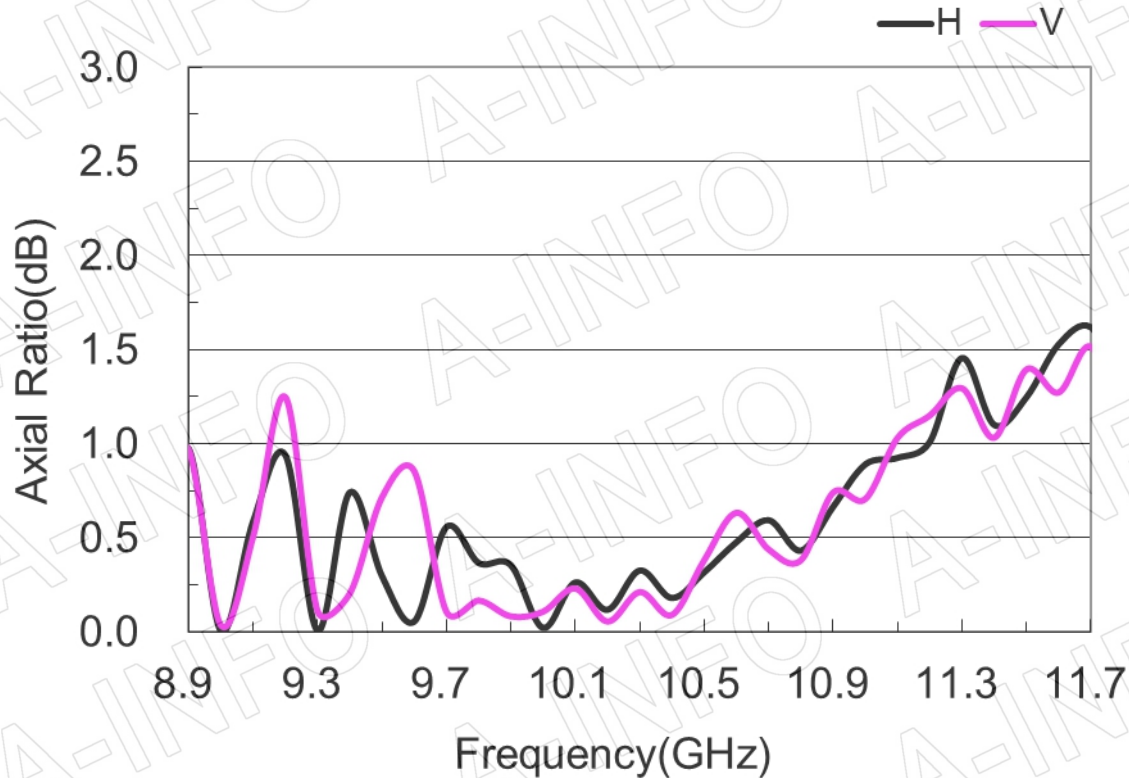

3. Port to Port Isolation

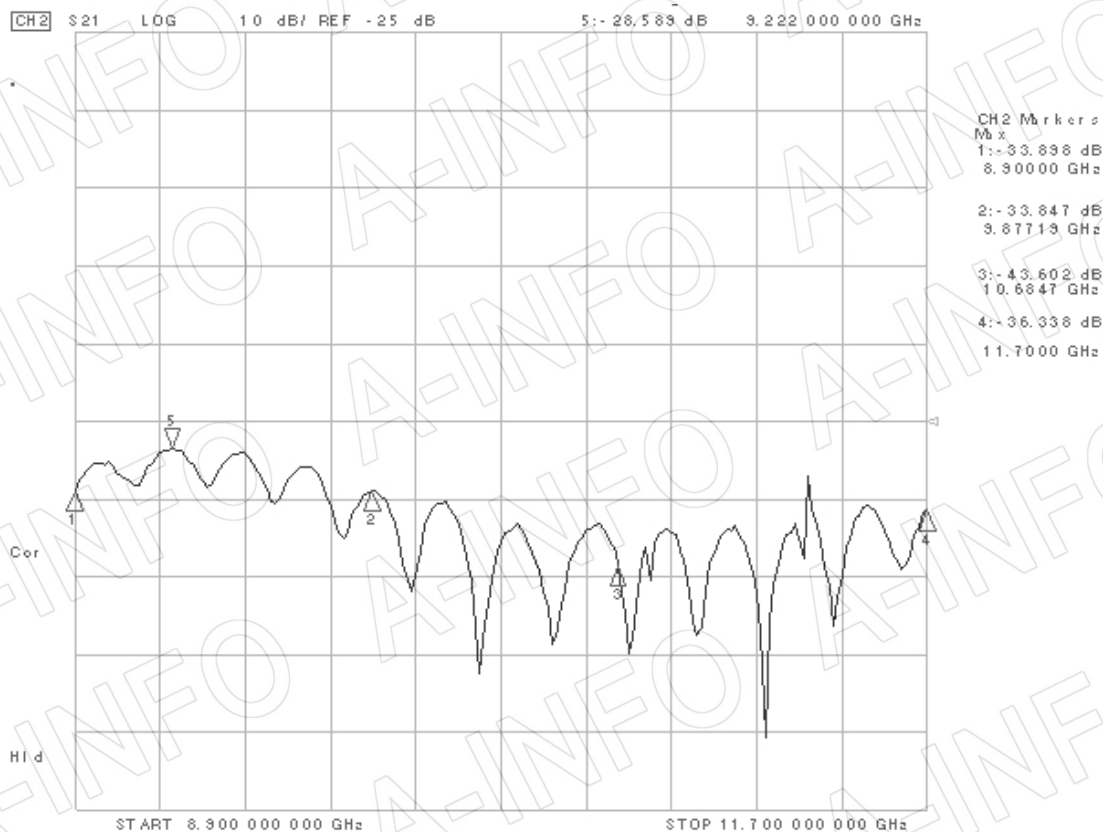

4. VSWR_A Type Port-H

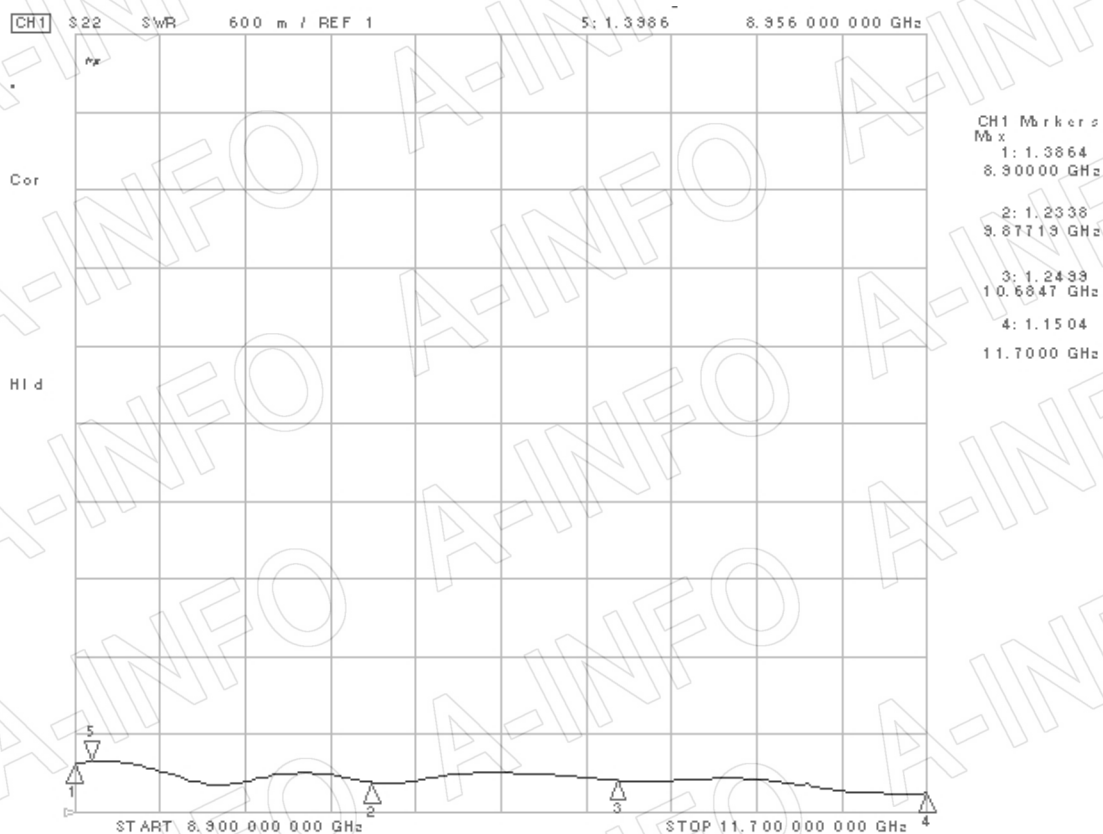

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :


Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Port-V

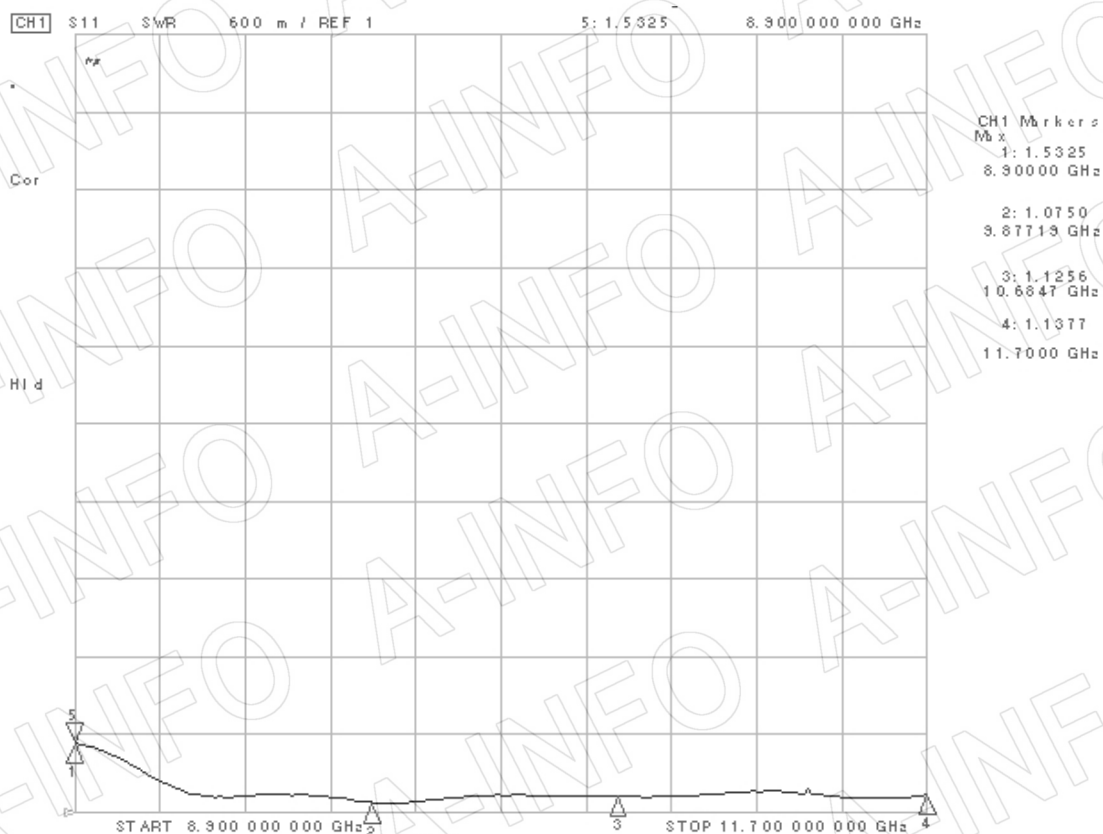

VSWR_C Type

Port-H

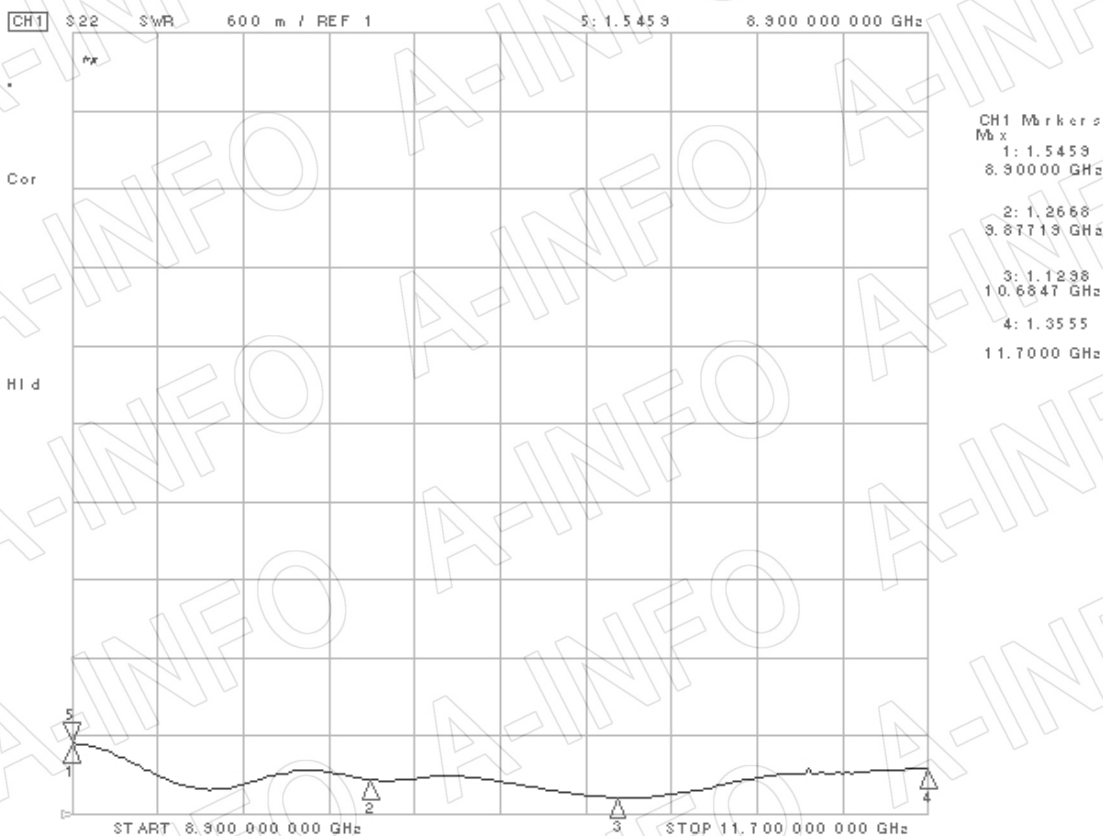

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :


Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Port-V

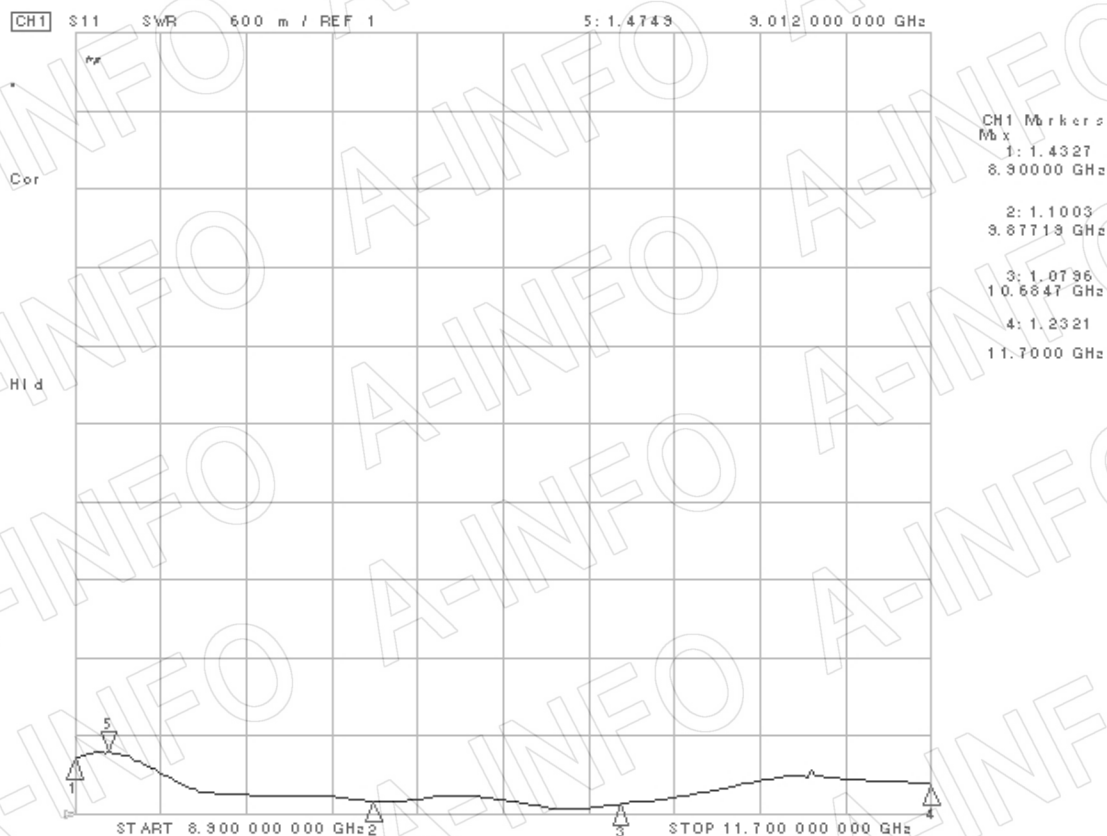

5. Pattern

Port-H

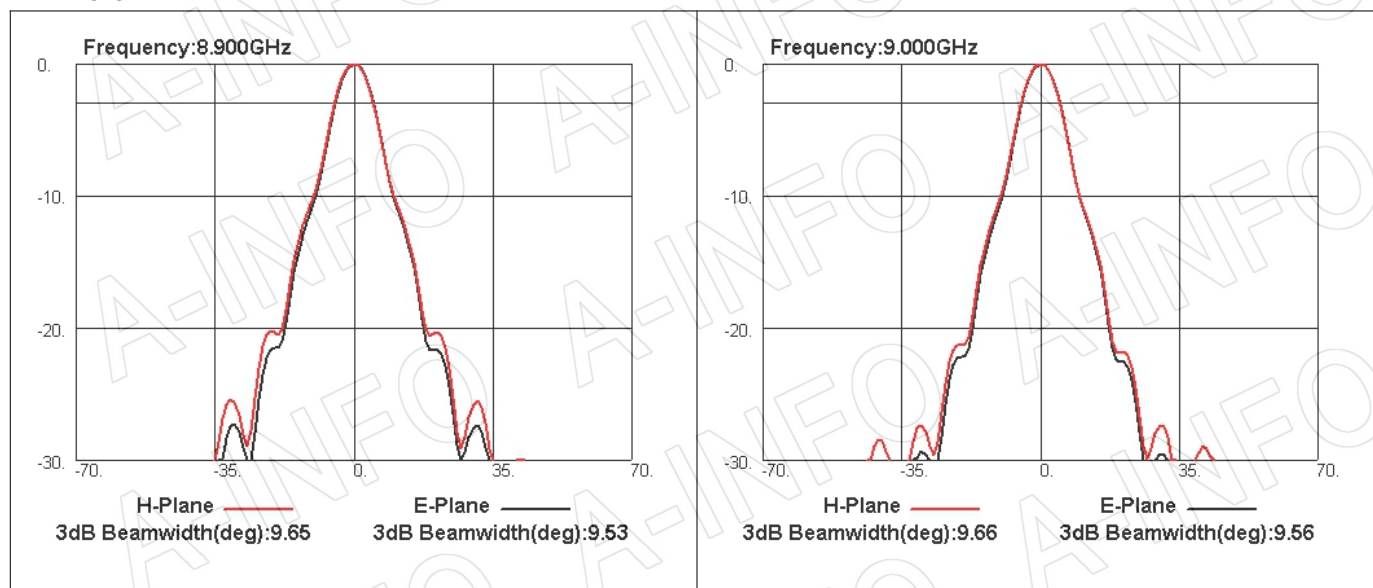

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :


Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

Page 8 of 11

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

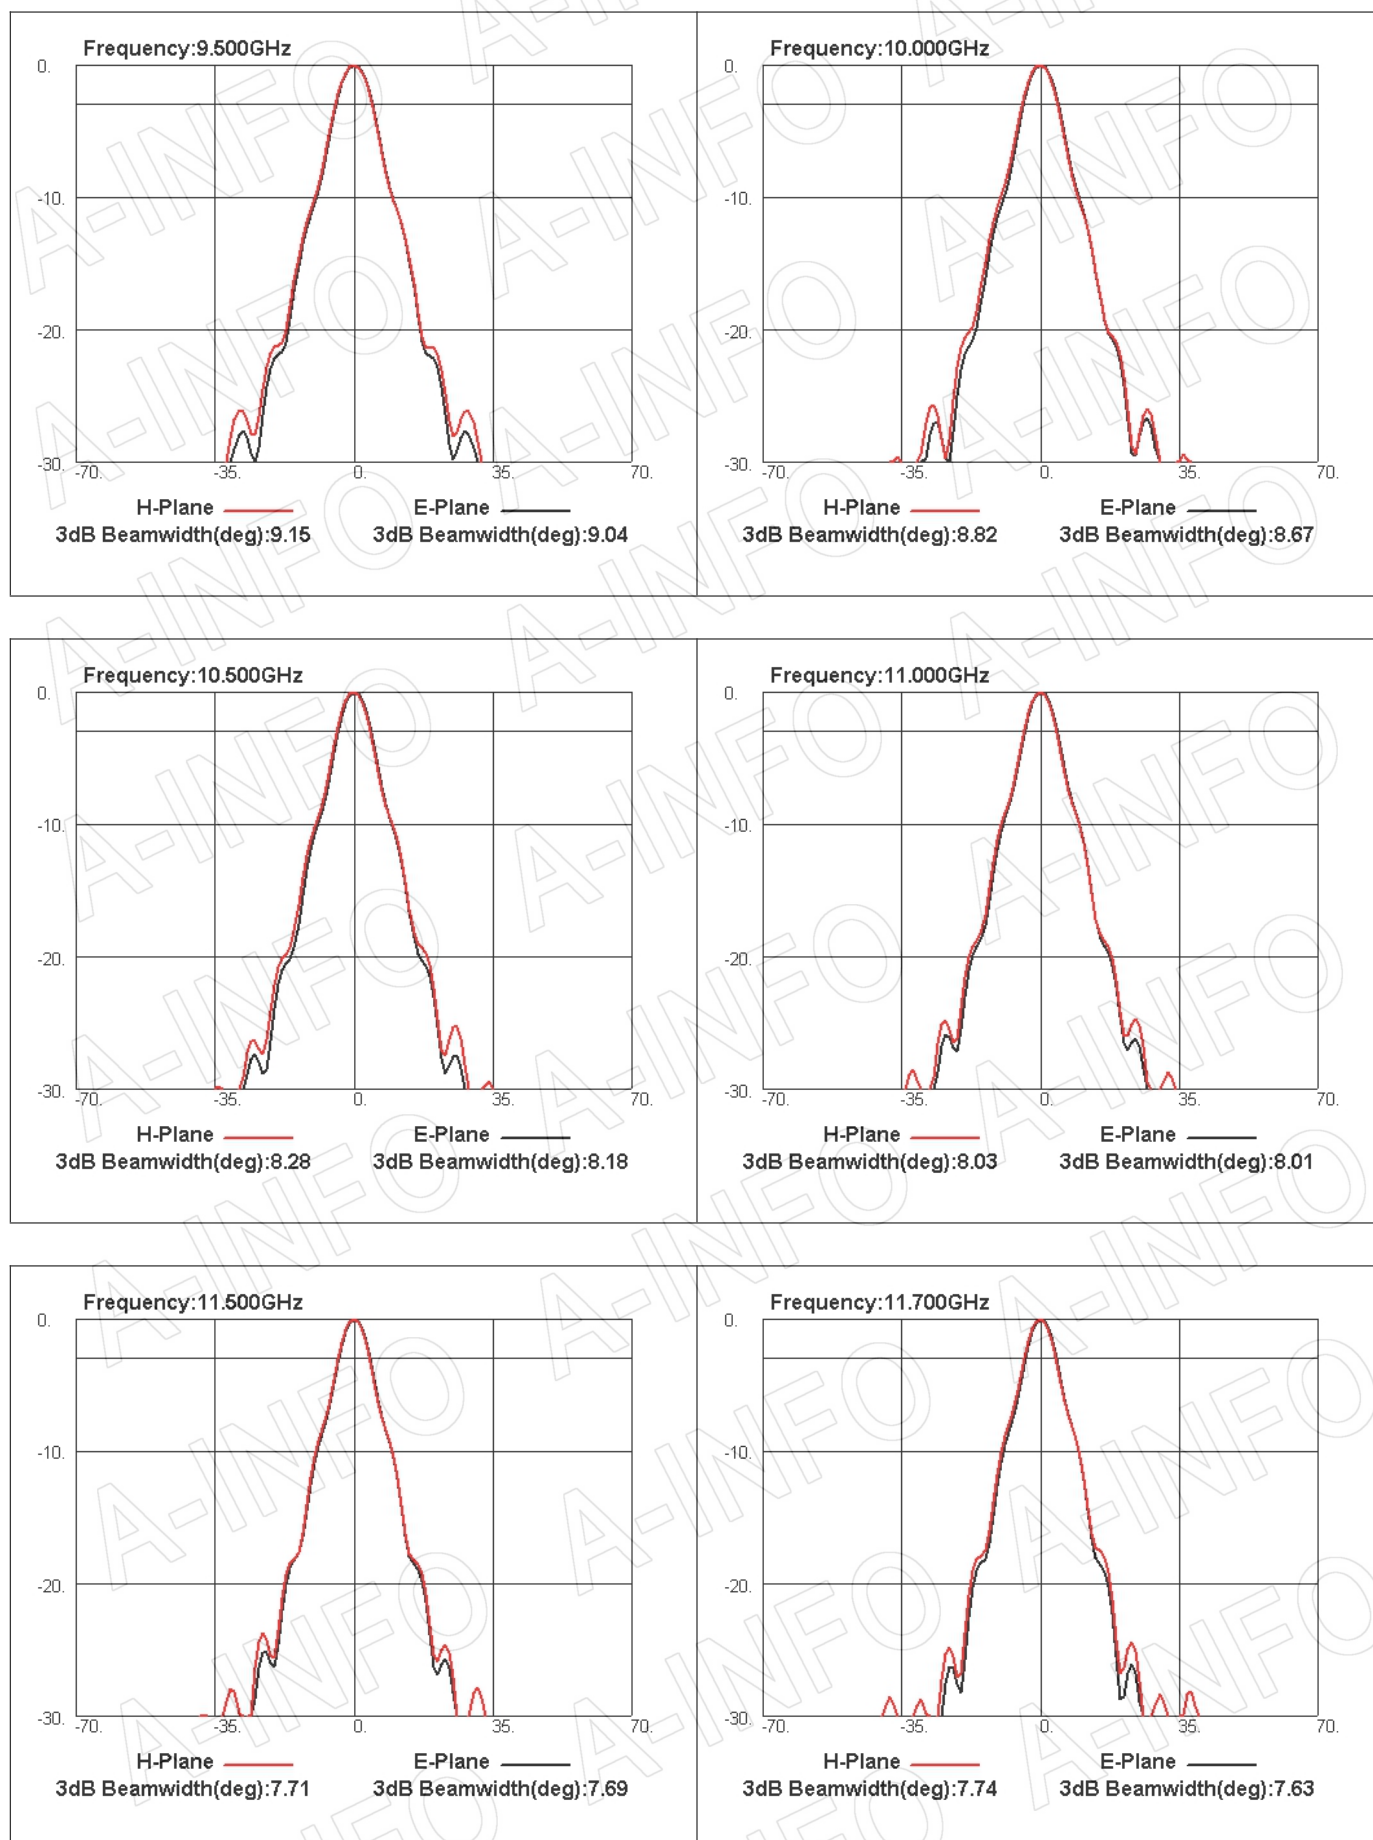

Port-V

