



For reference only. See data sheet for the detailed specifications.

Technical Specification

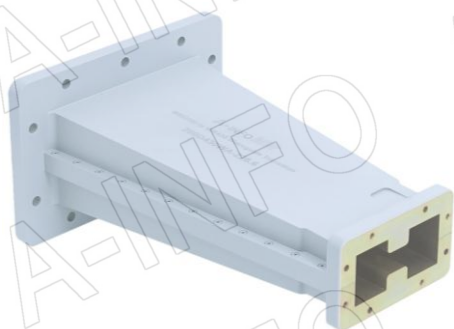

EIA WRD to WR	WRD200 to WR430
Frequency Range(GHz)	2.0 – 2.6
Length (mm/inch)	228.6/9
Insertion Loss(dB)	0.1 Max.
VSWR	1.15:1 Max.
WRD200 Flange	FPWRD200D24
WR430 Flange	FDP22(UDR22)
Material	Al
Size(mm)	228.6 x 161.1 x 106.4
Net Weight(Kg)	1.10 Around

Outline Drawing (Size: mm)

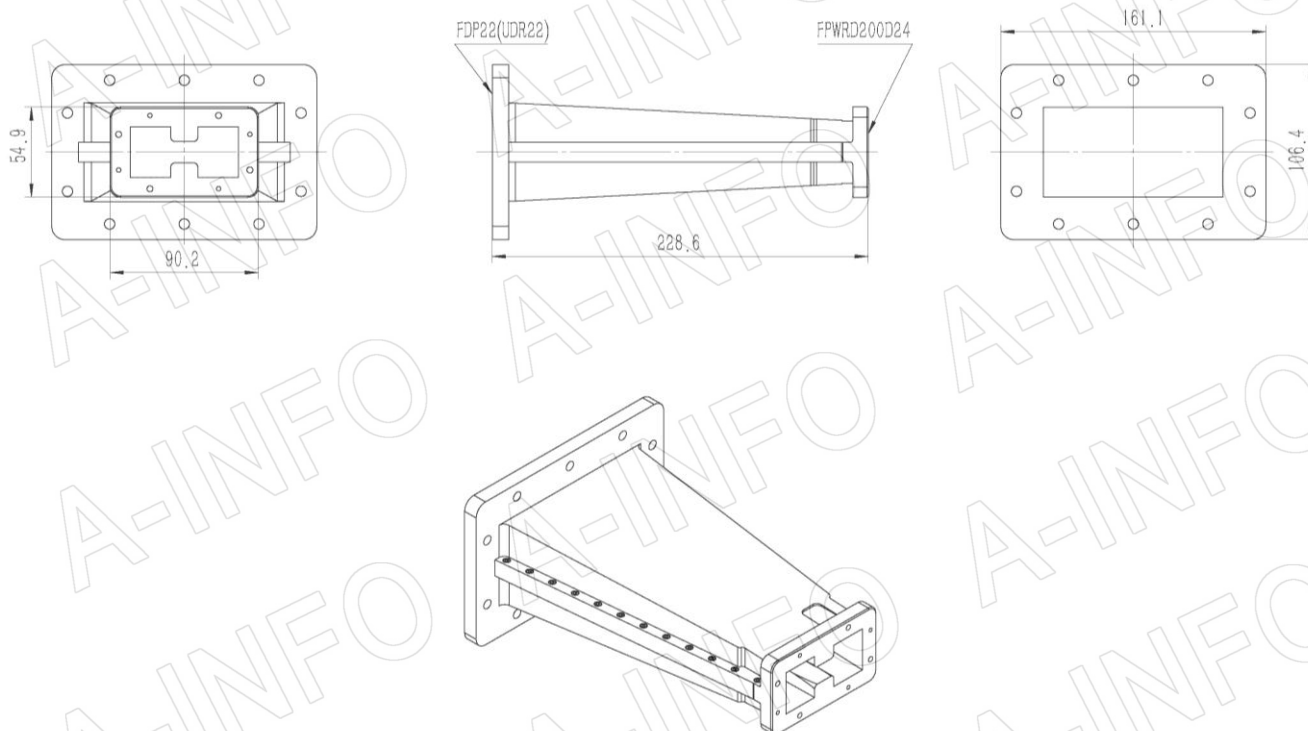

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

Page 1 of 3


(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

FPWRD200D24

(With four through mounting holes
and four screws holes)

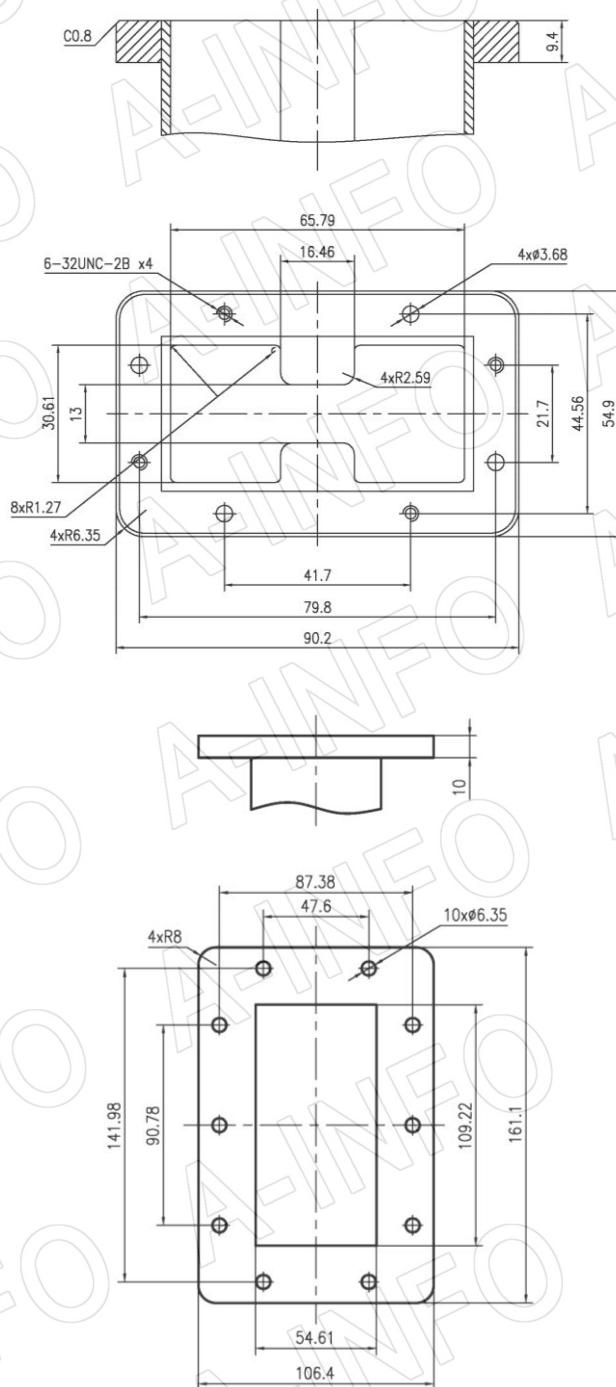

FDP22

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Page 2 of 3

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

Insertion Loss (Test with two transitions back to back)

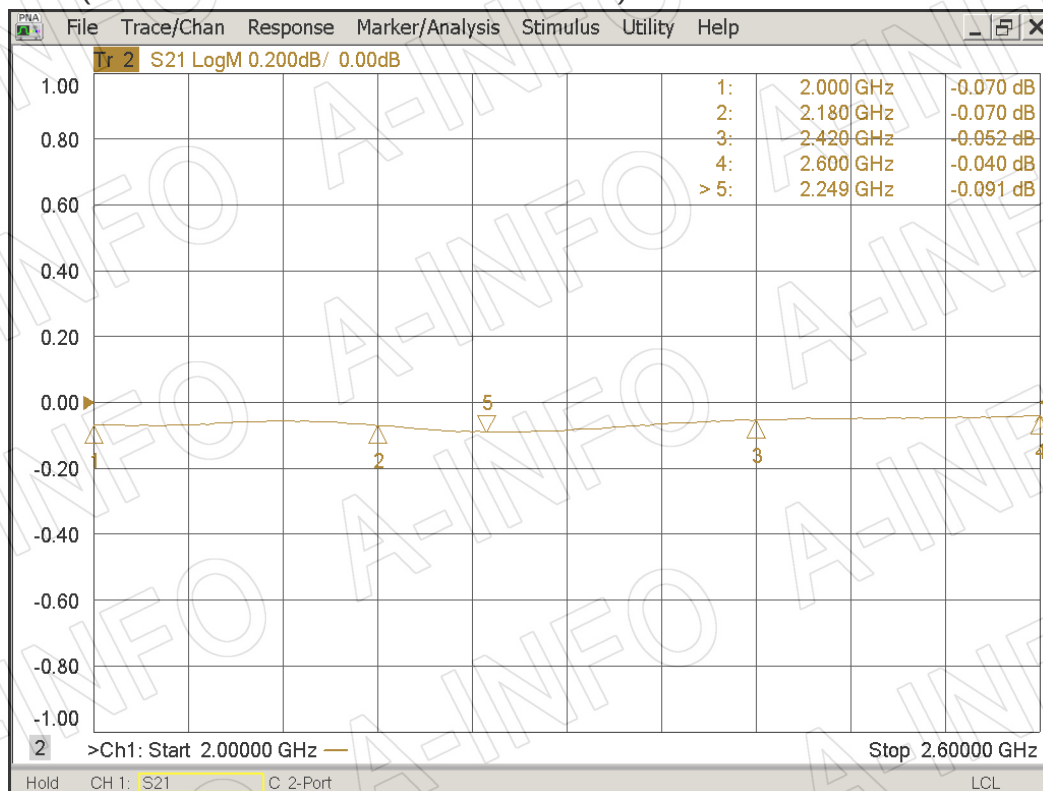

VSWR

