



For reference only. See data sheet for the detailed specifications.

Technical Specification

137EWGEN



137EWGEN-A1






Frequency Range(GHz)	5.85 – 8.20
Waveguide	WR137
Gain(dBi)	5 Typ.
Polarization	Linear
3dB Beamwidth(deg)	E Plane: 91 Typ.
	H Plane: 61 Typ.
Cross Pol. Isolation(dB)	30 Typ.
VSWR	2.0:1 Typ.
Output	Endlaunch N-Female or Endlaunch SMA-Female
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	137EWGEx: 101.6 x 101.6 x 284.9
	137EWGEx-A1: 400 x 400 x 284.9
Net Weight(Kg)	137EWGEx: 0.35 Around
	137EWGEx-A1: 2.75 Around

Outline Drawing (Size: mm)

Endlaunch N-Female Output (P/N: 137EWGEN)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

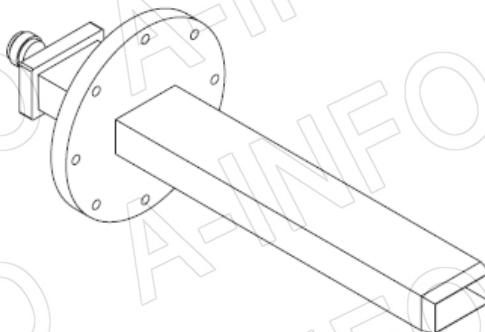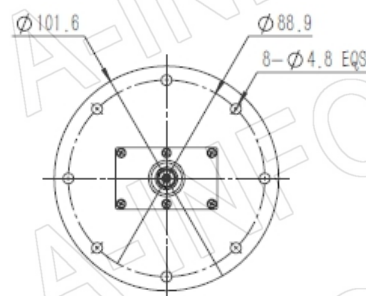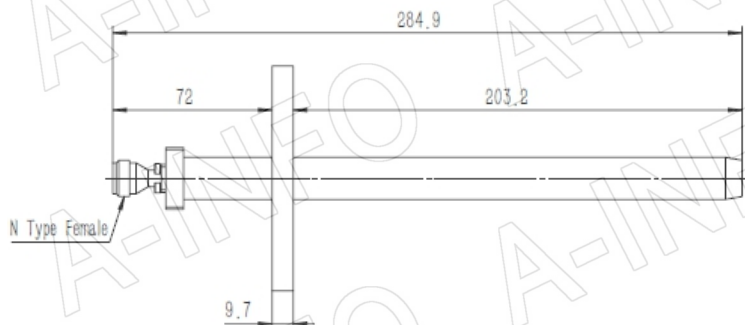

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Page 1 of 7

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


Endlaunch N-Female Output with Round Mounting Bracket (Option, P/N: EWG-MB20)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

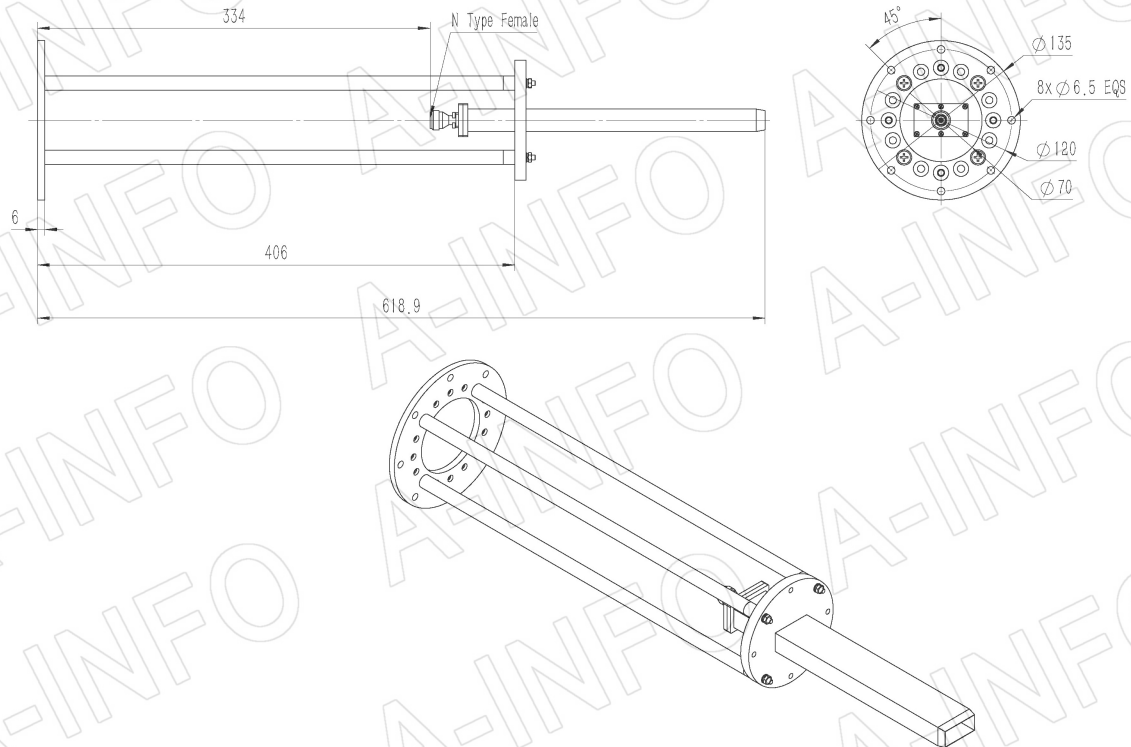


Endlaunch N-Female Output, Equipped with Absorber (Option, P/N: 137EWGEN-A1)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

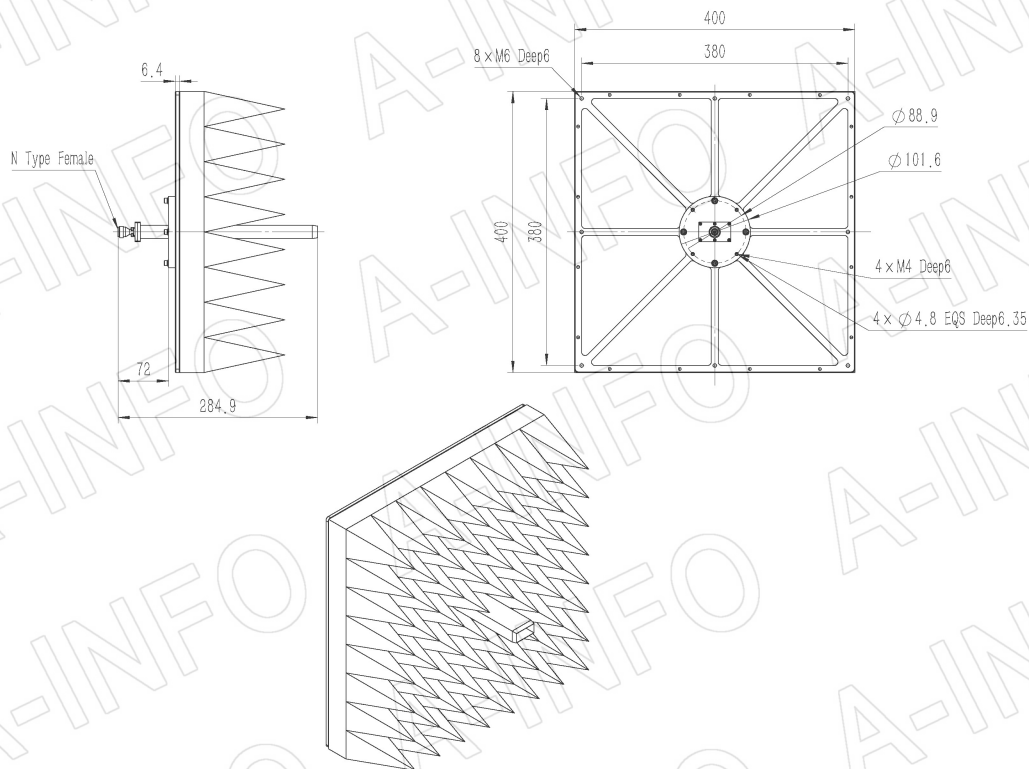



Endlaunch N-Female Output with Round Mounting Bracket & Equipped with Absorber (Option, P/N: EWG-MB20 & 137EWGEN-A1)

For Endlaunch SMA-Female output outline drawing, please contact A-INFO.

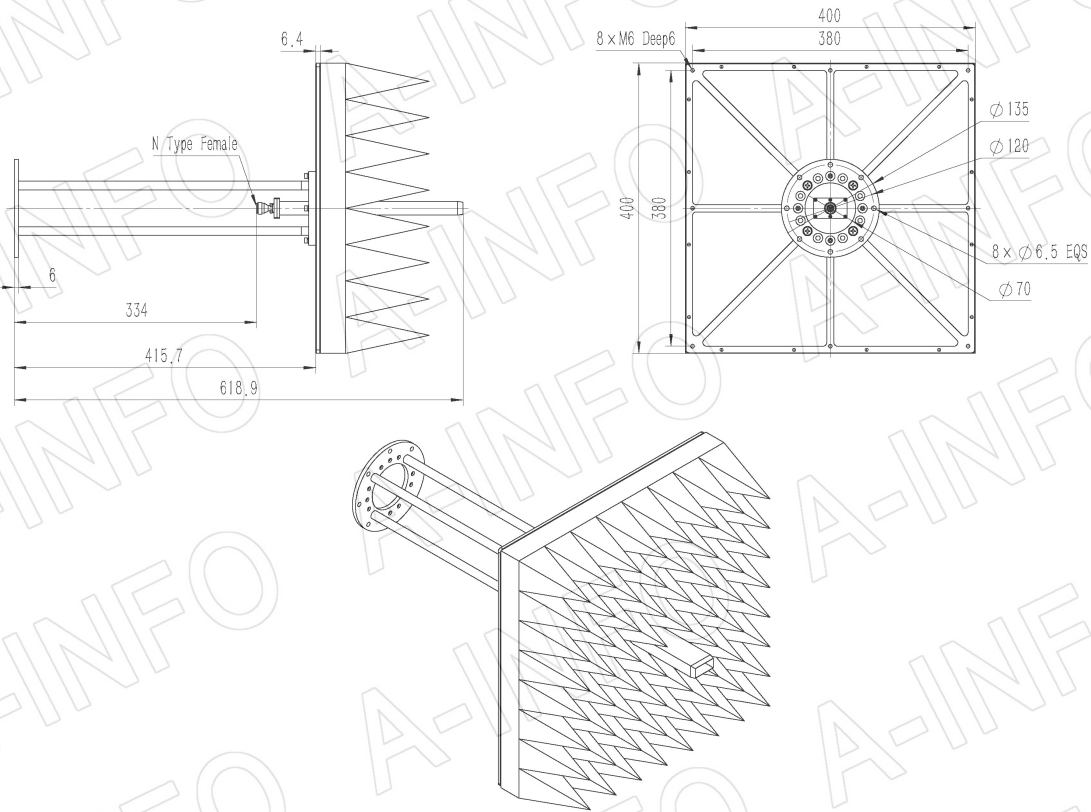


Test Results


1. Gain & Antenna Factor

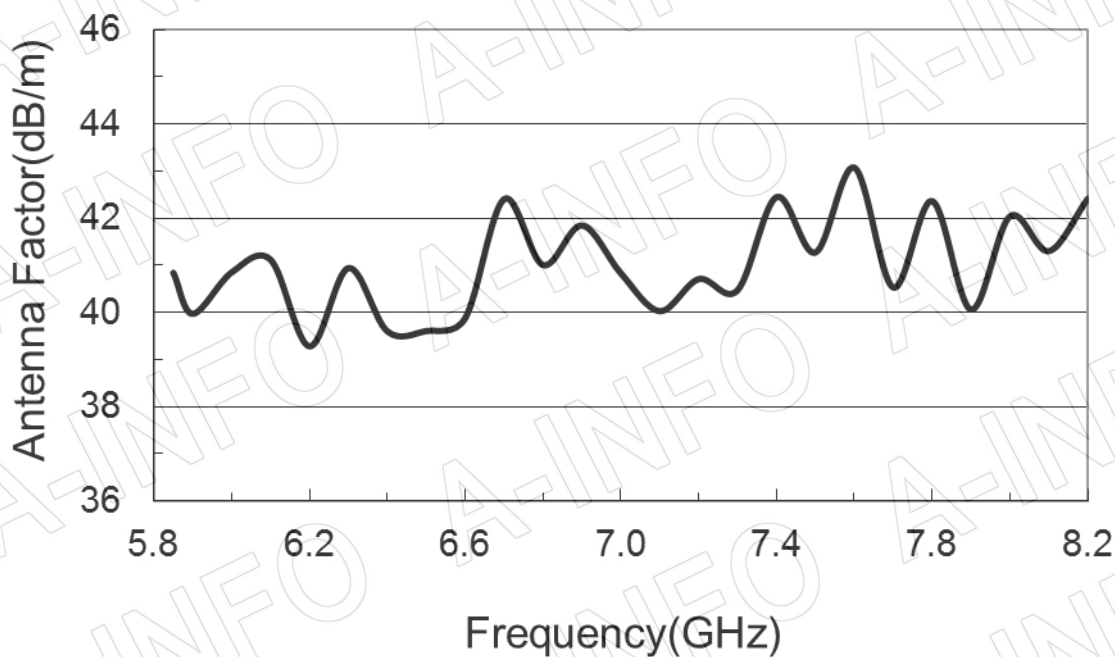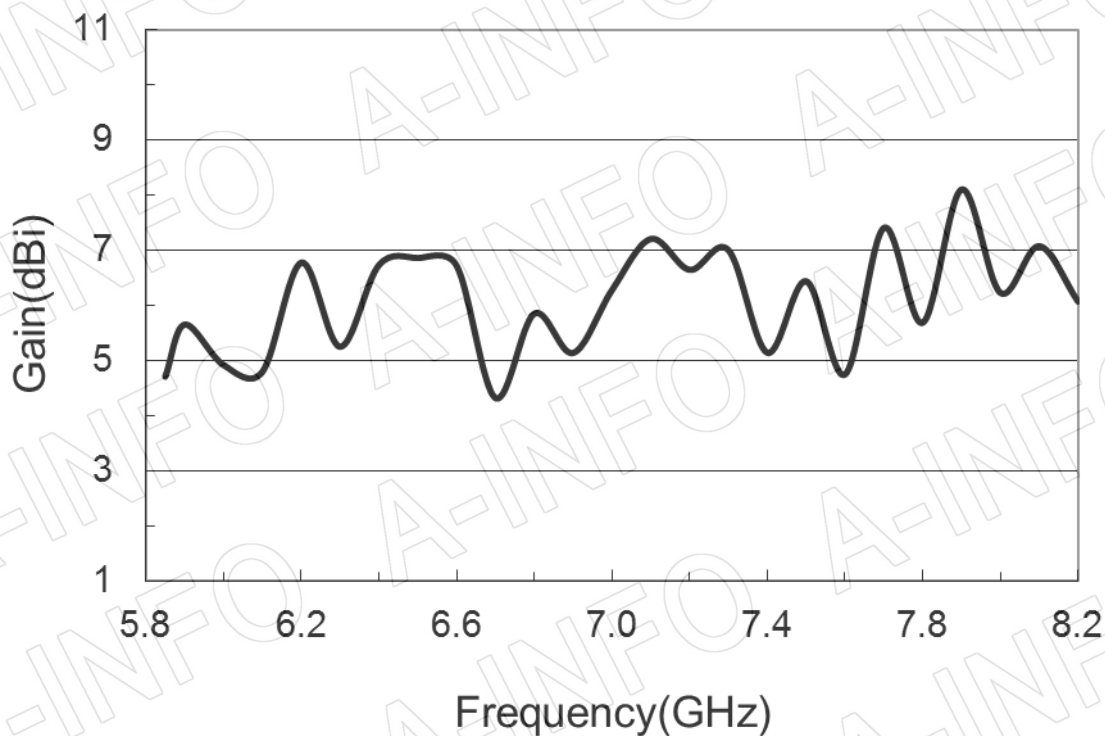

2. Cross Polarization Isolation

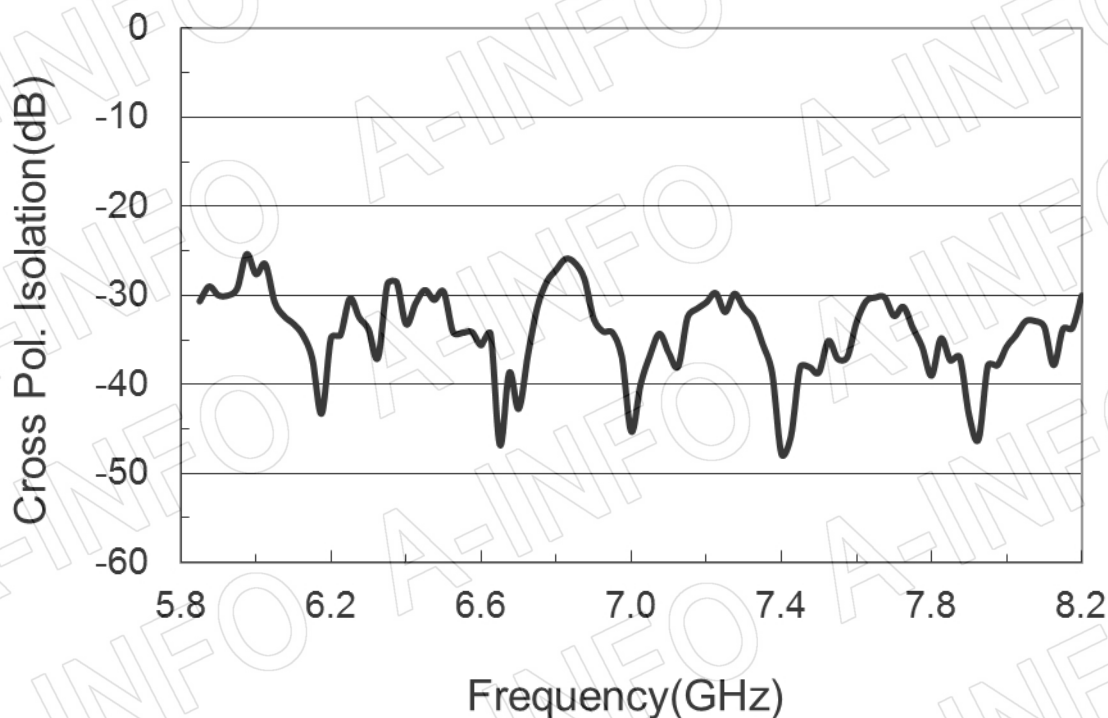

3. VSWR

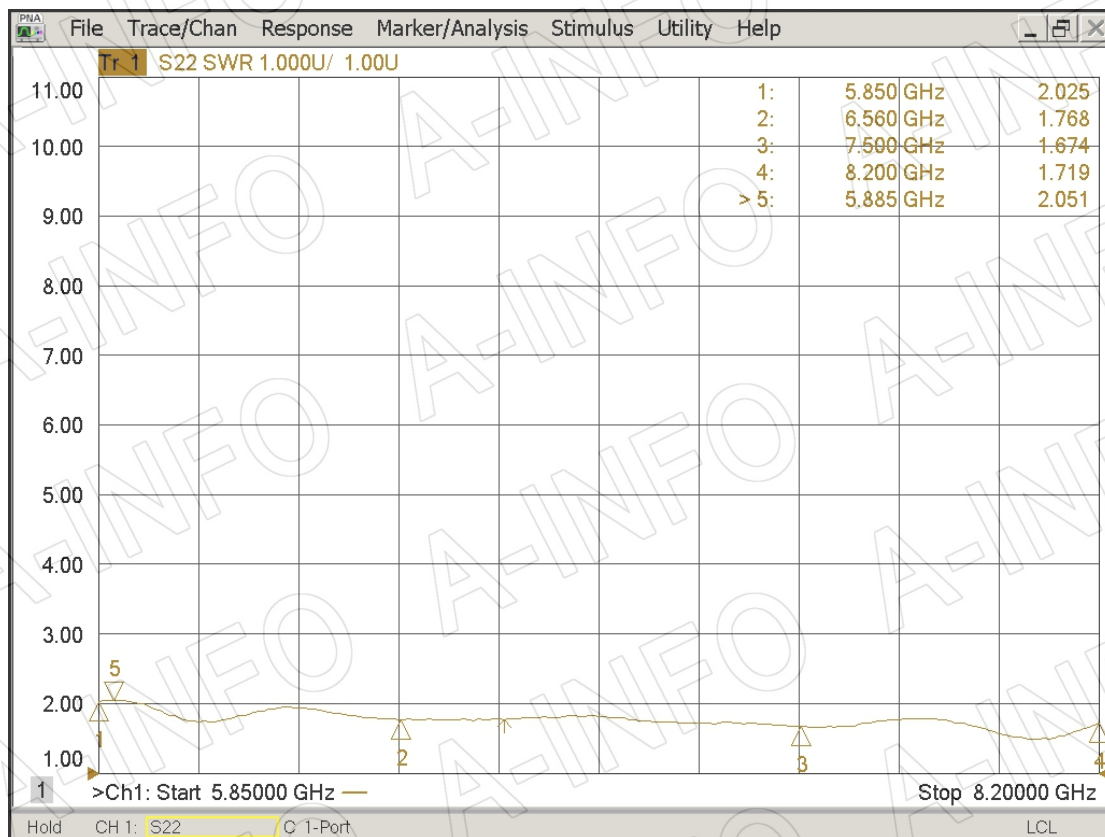

4. Pattern

