

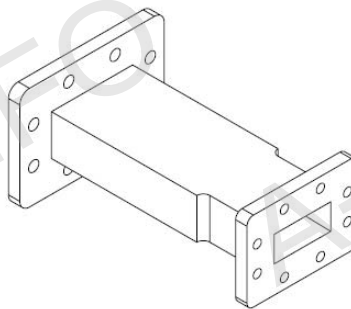



Technical Specification

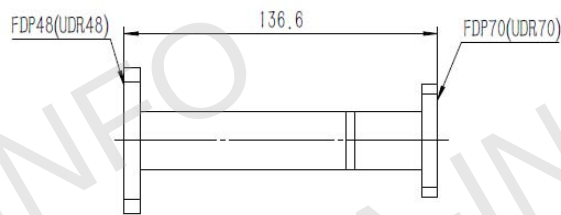


EIA WR to WR	WR187 to WR137
Frequency Range(GHz)	WR187: 3.95-5.85
	WR137: 5.85-8.20
Insertion Loss(dB)	0.05 Max.
VSWR	1.05:1 Max.
WR187 Flange	FDP48(UDR48)
WR137 Flange	FDP70(UDR70)
Material	Al
Size(mm)	136.6 x 88.9 x 83.5
Net Weight(Kg)	0.30 Around

Outline Drawing (Size: mm)



Outline Drawing (Size: mm)

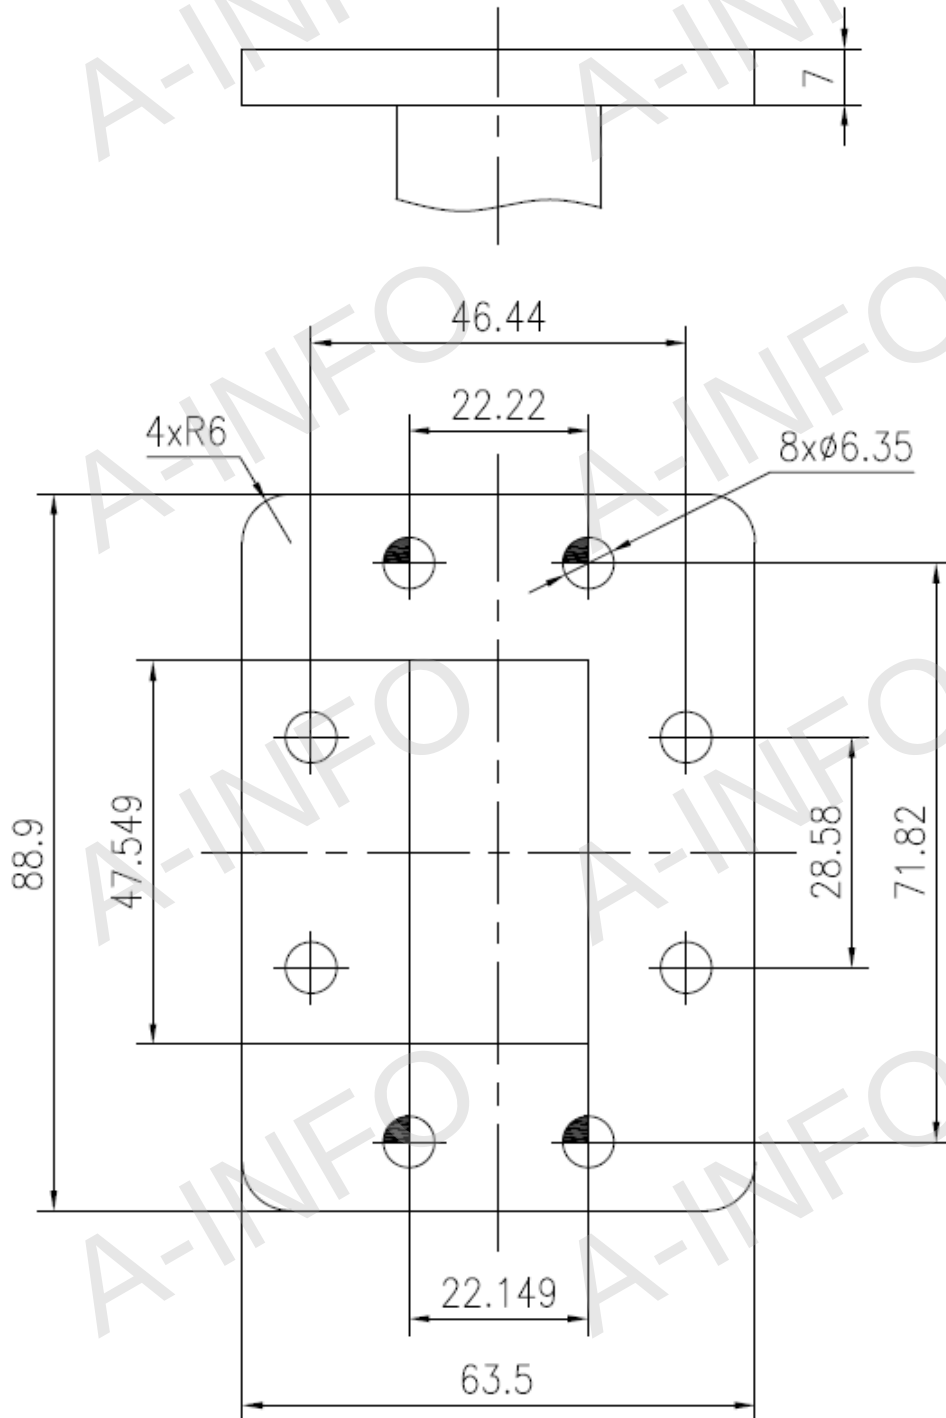

FDP48

AINFO Inc.

Page 2 of 4


China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

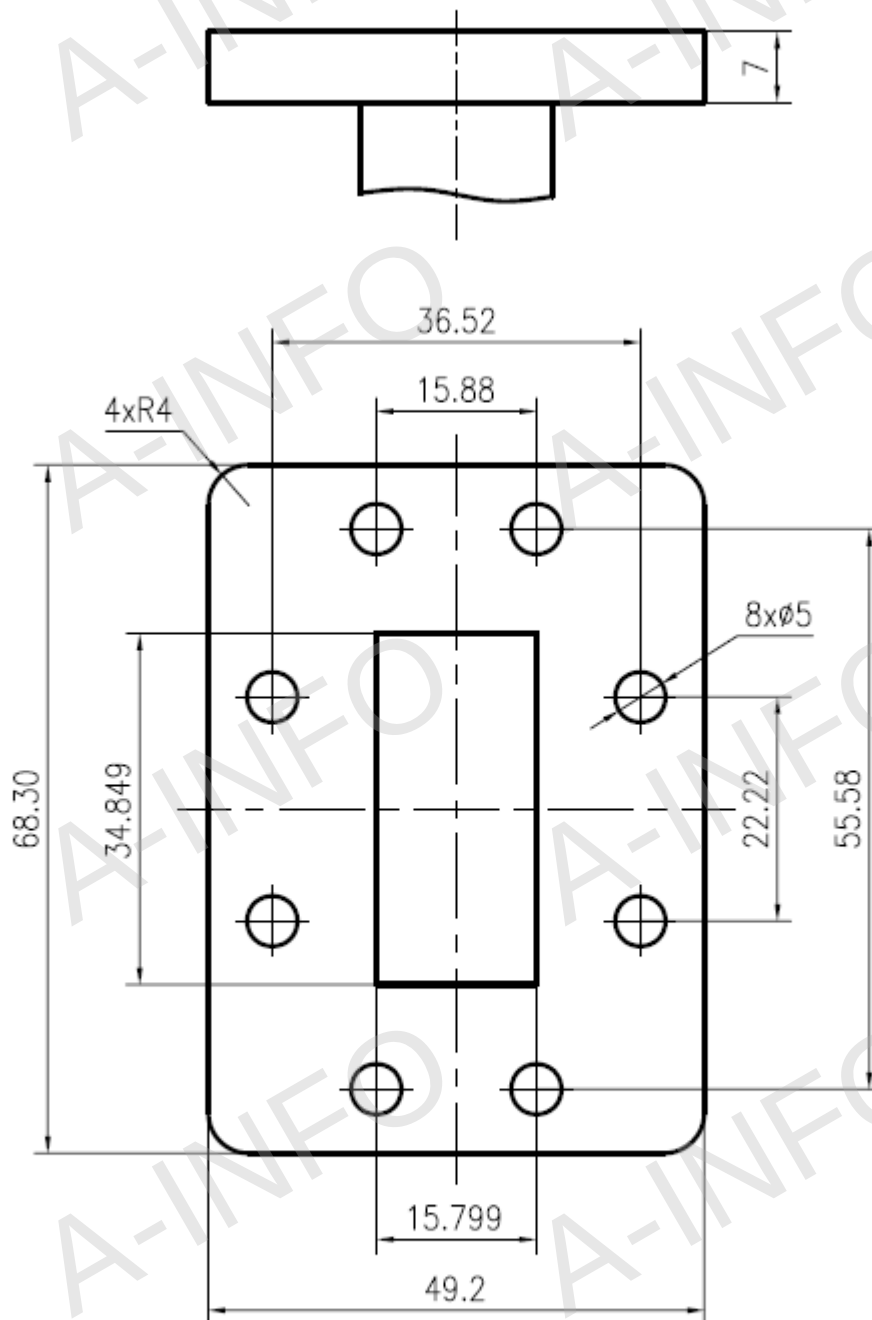

FDP70

AINFO Inc.

Page 3 of 4

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

Insertion Loss (Test with two adapters back to back)

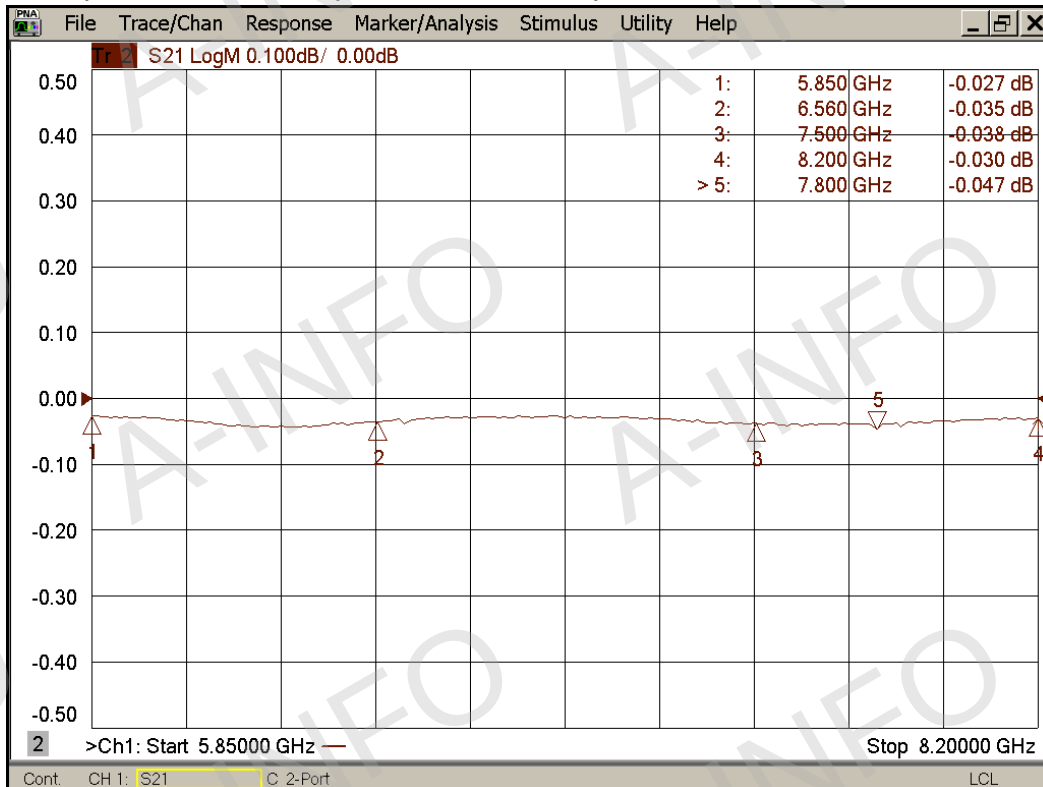

VSWR

