



For reference only. See data sheet for the detailed specifications.

Technical Specification

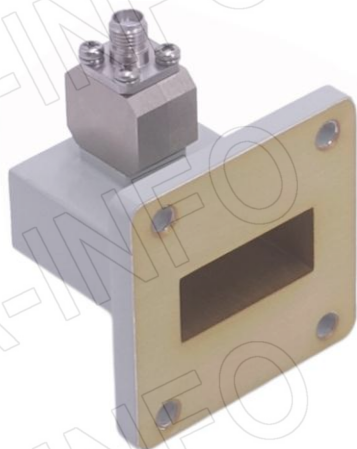

EIA WR	WR112
Frequency Range(GHz)	7.05 – 10.0
Sensitivity(mV/mW)	300 Typ.
Anti-Burning Power(mW)	25-100
Detector Typ.	Positive
Response Speed(μs)	30
Input	FBP84(UBR84)
Output Connector	SMA-Female
Material	Al
Size(mm)	40 x 47.8 x 59.6
Net Weight(Kg)	0.06 Around

Outline Drawing (Size: mm)

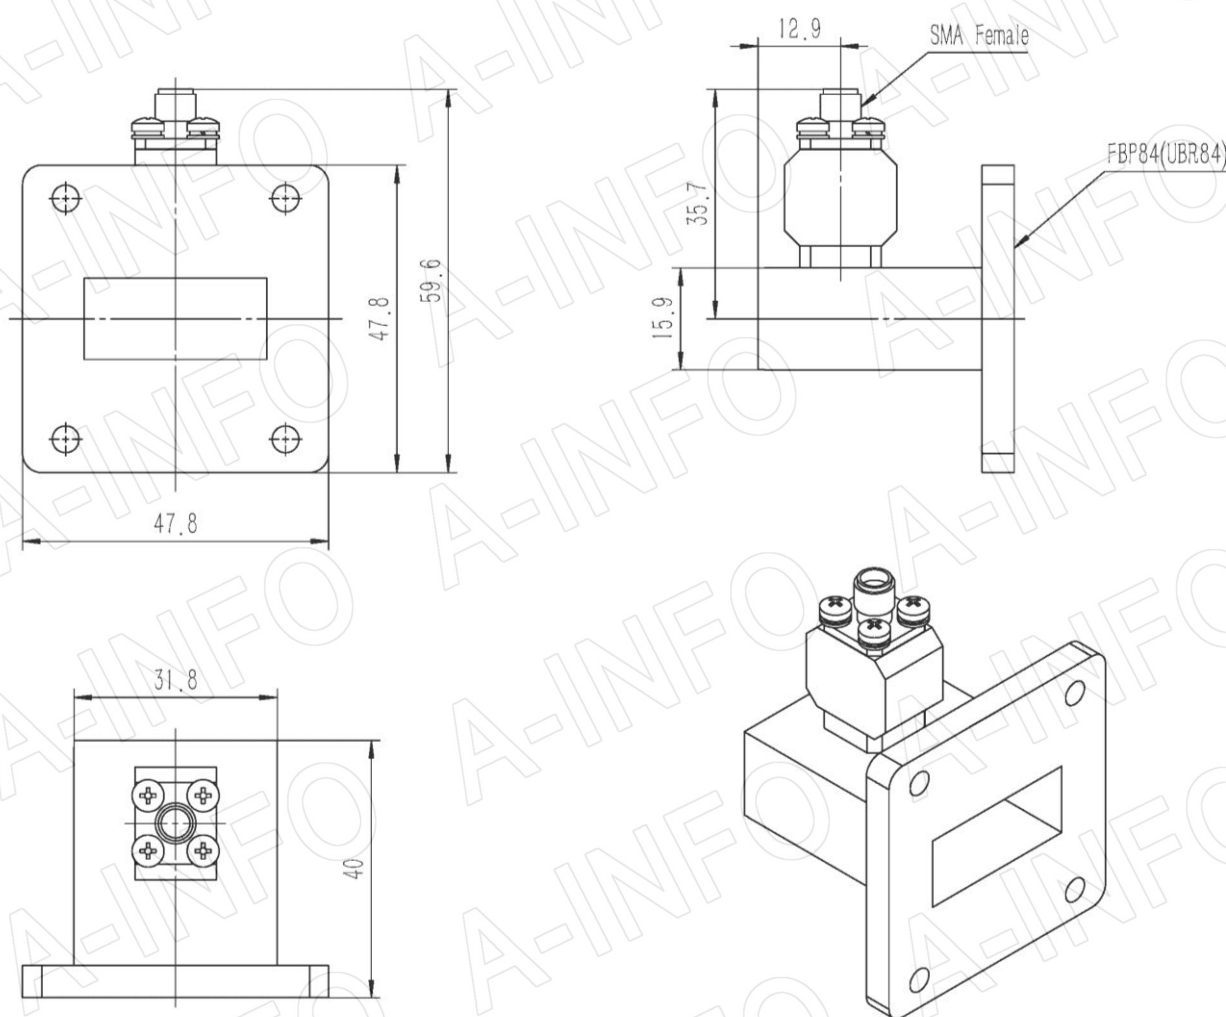

AINFO Inc.


China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-346-7326,

Page 1 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9660 Fax: (+1) 949-639-9659

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

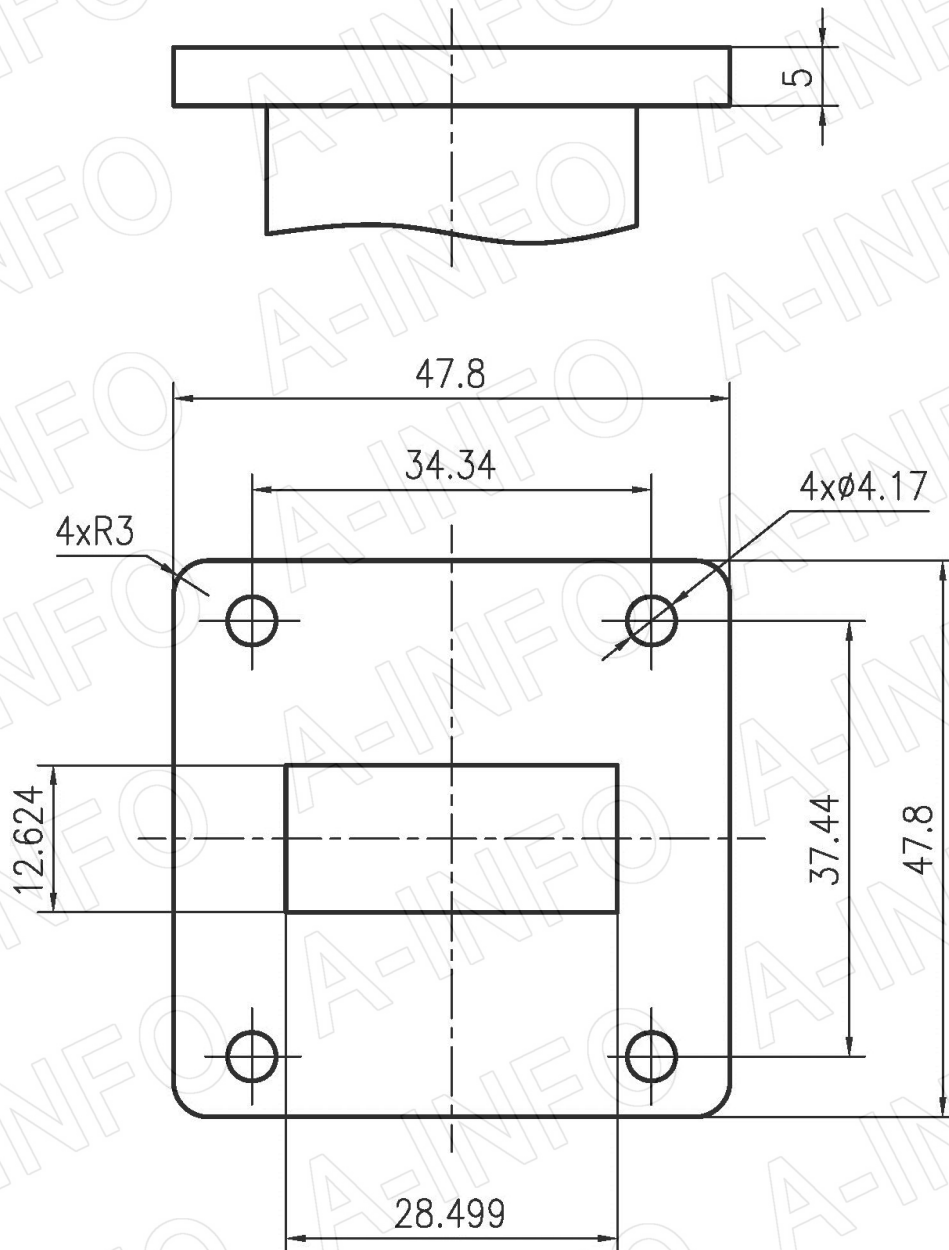

FBP84

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-346-7326,


Page 2 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9660 Fax: (+1) 949-639-9659


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

Sensitivity ($P_{in} = -10\text{dBm}$)

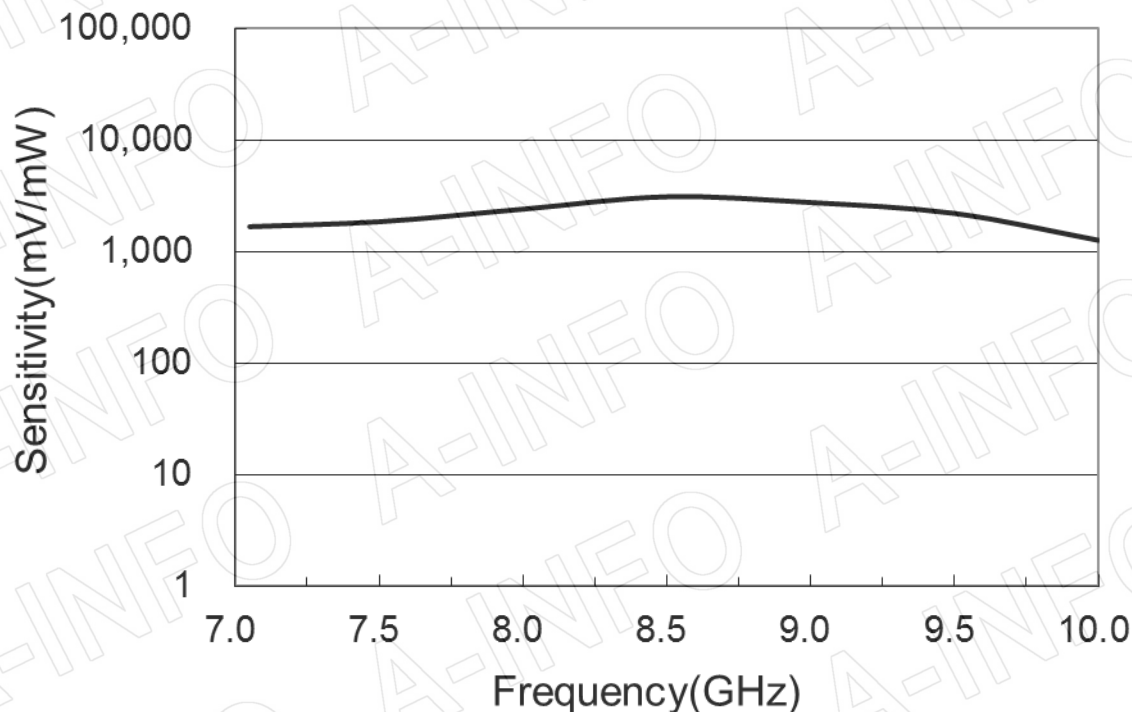

Output Voltage

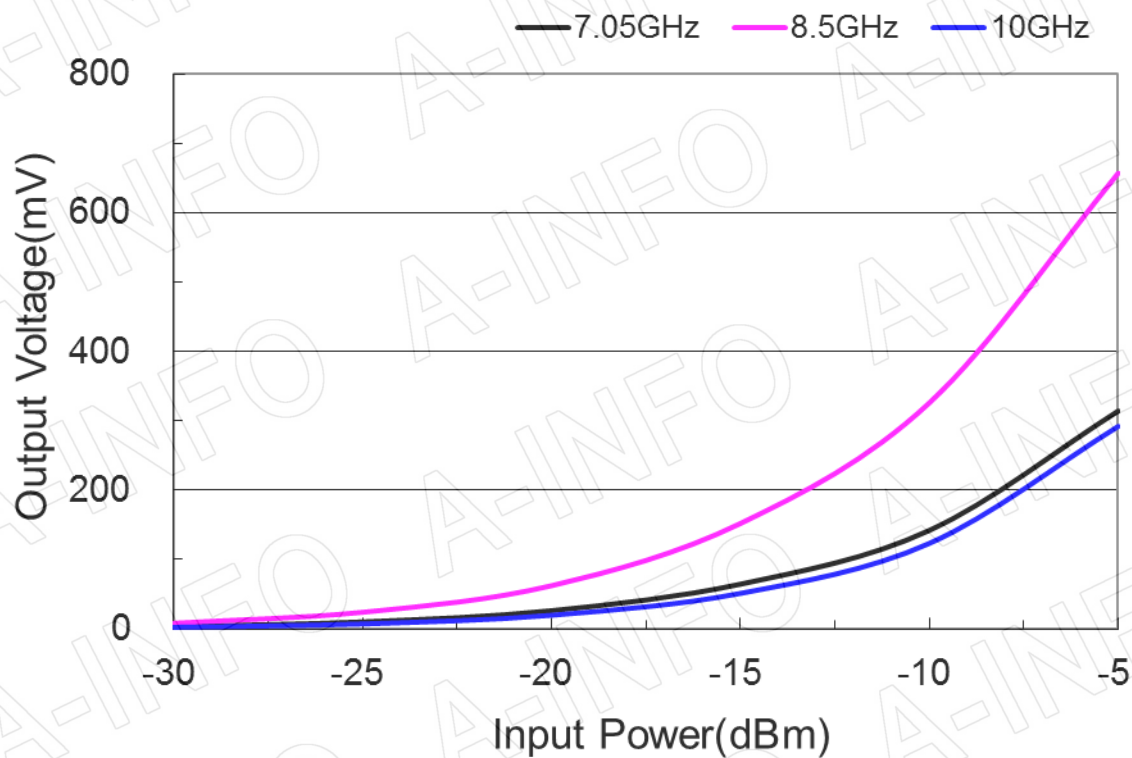

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-346-7326,

Page 3 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9660 Fax: (+1) 949-639-9659

Website: www.ainfoinc.com
Email: sales@ainfoinc.com