


For reference only. See data sheet for the detailed specifications.

Technical Specification



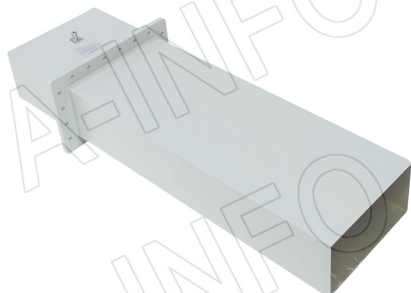


Frequency Range(GHz)	0.64 - 0.96
Waveguide	WR1150
Gain(dBi)	5 Typ.
Polarization	Linear
3dB Beamwidth(deg)	E Plane: 97 Typ.
	H Plane: 61 Typ.
Cross Pol. Isolation(dB)	30 Typ.
VSWR	2.0:1 Typ.
Output	N-Female or SMA-Female or 7/16-Female
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	381 x 235 x 1080.8
Net Weight(Kg)	10.0 Around

Outline Drawing (Size: mm)

N-Female Output (P/N: 1150EWGN)

For SMA-Female or 7/16-Female output outline drawing, please contact A-INFO.

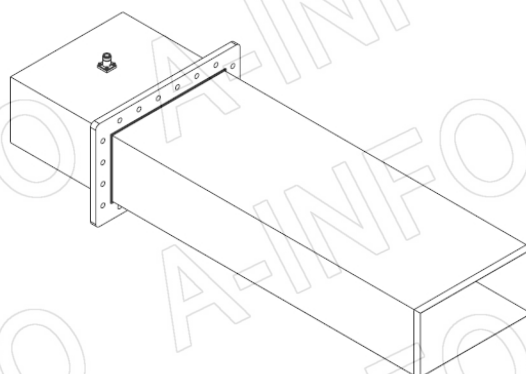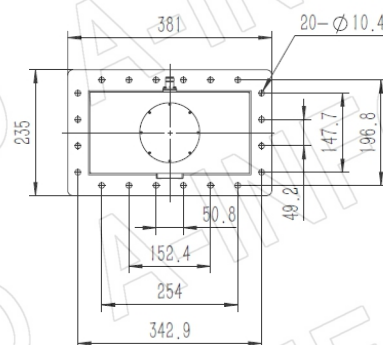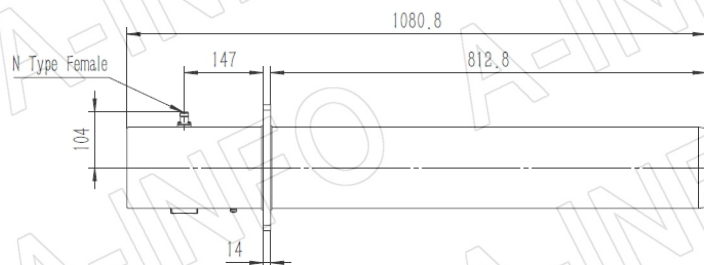

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

Page 1 of 2

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

VSWR

